

# 無線網路多媒體系統 Wireless Multimedia System


Lecture 5: Cellular Concepts  
中央大學 吳曉光博士



## Mobility Support & Channel Reuse



Mobility Support~ Handover

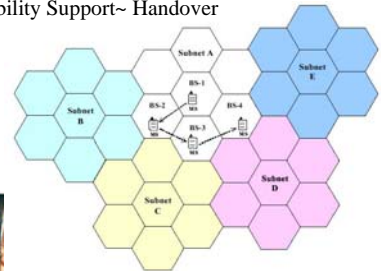

Channel Allocations: Reuse



中央大學生活資訊網


WAP 個人化設定  
個人化設定  
WEB BING  
設置頁




## ChungLi Case Study



## Moving Behavior

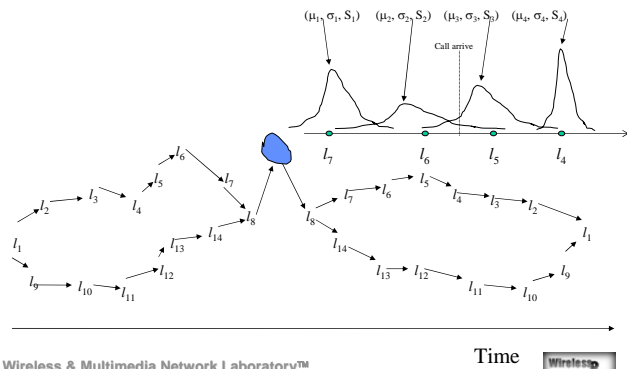

## Mobile Broadband Infrastructure Diagram

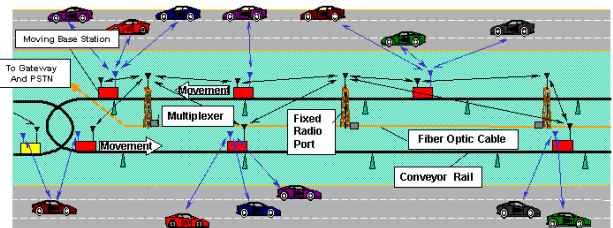

- 20 Mbit/sec Channel using 5GHz CDMA Spectrum at 60 GHz  
Low Power from Mobile Unit to Moving Base Station  
High Power from Moving Base Station to Mobile Unit
- 5 GHz CDMA Channel at 60 GHz  
Low Power from Fixed Radio Port to Moving Base Station  
High Power from Moving Base Station to Fixed Radio Port

## Channel Assignment in Cellular System

CSE

- ◆ Fundamental Problem:
- ◆ Fixed Channel Assignment
- ◆ Dynamic Channel Assignment
- ◆ Hybrid Schemes
- ◆ Whole Channel Usage (CDMA)
- ◆ Reduce the Cell Size

## Hand-off in Cellular Networks

CSE

- ◆ Transfer of mobile to a new channel when it crosses cell boundary
- ◆ Handoff delay
- ◆ Prioritizing handoffs to reduce probability of dropped calls
- ◆ Handoff Strategies
- ◆ Network Controlled handoff (NCHO)
- ◆ Mobile assisted handoff (MAHO)
- ◆ Mobile controlled handoff (MCHO)

## Agenda

CSE

- ◆ Cellular Concepts
- ◆ Channel Assignments
- ◆ Handover
- ◆ Next Lecture: 3G WCDMA design



## Reading

CSE


- ◆ [Katzela96]Katzela, and M. Nahgshineh, "Channel assignment schemes for cellular mobile telecommunication systems: a comprehensive survey," IEEE Personal Communications, June 1996
- ◆ [Pollin96], G.P. Pollini, "Trends in handover design," IEEE Communications Magazine, March 1996.



## Channel Allocation


CSE

- ◆ A given Channel Spectrum (or bandwidth) can be divided into a set of disjoint or non-interfering radio channel
  - Frequency Division
    - ◆ frequency band
  - Time Division
    - ◆ time slot
  - Code Division
    - ◆ modulation code




## Cellular System Concept

CSE

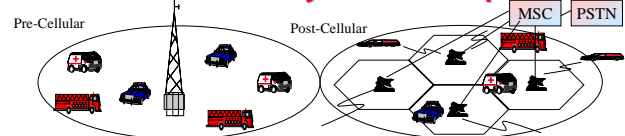


- ◆ Replace single high power transmitter covering the entire service area with low power
  - Mobiles in sufficiently distant base-stations may be assigned identical channel (frequency, time slot, & code)
  - System capacity may be increased without adding more spectrum
- ◆ Major conceptual breakthrough in spectra congestion & user capacity
  - Required relatively minor technological changes frequency reuse & co-channel interference, channel allocation, hand-offs


### Cell Shape



(a) Ideal cell




(b) Actual cell

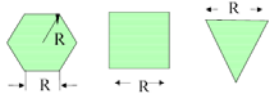

(c) Different cell models

Wireless & Multimedia Network Laboratory™

### Frequency Reuse

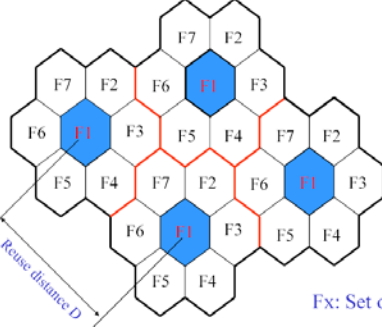


Fx: Set of frequency

7 cell reuse cluster

Wireless & Multimedia Network Laboratory™

### Reuse Distance

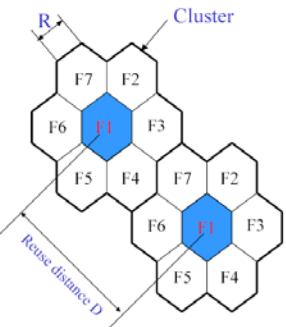


- For hexagonal cells, the reuse distance is given by
 
$$D = \sqrt{3N}R$$
 where  $R$  is cell radius and  $N$  is the reuse pattern (the cluster size or the number of cells per cluster).
- Reuse factor is
 
$$\frac{D}{R} = \sqrt{3N}$$

Wireless & Multimedia Network Laboratory™

### Reuse Distance (Cont'd)


- The cluster size or the number of cells per cluster is given by
 
$$N = i^2 + ij + j^2$$
 where  $i$  and  $j$  are integers.



- $N = 1, 3, 4, 7, 9, 12, 13, 16, 19, 21, 28, \dots$ , etc.
- The popular value of  $N$  being 4 and 7.


Wireless & Multimedia Network Laboratory™

### Cochannel Interference

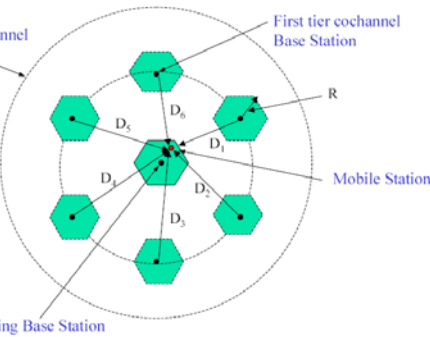

Wireless & Multimedia Network Laboratory™

### Worst Case of Cochannel Interference

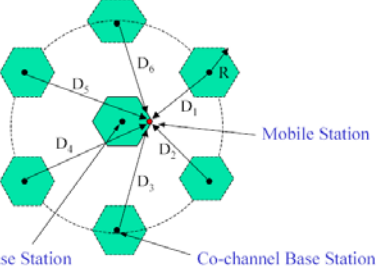

Wireless & Multimedia Network Laboratory™

## Cochannel Interference

- Cochannel interference ratio is given by

$$\frac{C}{I} = \frac{\text{Carrier}}{\text{Interference}} = \frac{C}{\sum_{k=1}^M I_k}$$

where  $I$  is co-channel interference and  $M$  is the maximum number of co-channel interfering cells.

For  $M = 6$ ,  $C/I$  is given by

$$\frac{C}{I} = \frac{C}{\sum_{k=1}^6 \left(\frac{D_k}{R}\right)^\gamma}$$

where  $\gamma$  is the propagation path loss slope and  $\gamma = 2-5$ .

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

## Channel Reuse

- The same channel is reused simultaneously by other sets (Co-channel)

$$CIR = \frac{\text{signal}}{\text{interference}} = \frac{P_s d_s^{-\alpha}}{\sum P_i d_i^{-\alpha} + N_0}$$

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

## Interference

$$CIR = \frac{\text{signal}}{\text{interference}} = \frac{P_s d_s^{-\alpha}}{\sum P_i d_i^{-\alpha} + N_0}$$

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

## How to improve CIR (Quality)

- Increase the transmitting power (Power Control)
- Increase the separating distance (Channel Reuse)

$$CIR = \frac{\text{signal}}{\text{interference}} = \frac{P_s d_s^{-\alpha}}{\sum P_i d_i^{-\alpha} + N_0}$$

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

## Approaches

- Fixed no flexibility
- Dynamic complexity
- Hybrid might be ok

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

## Frequency Reuse

Idealized grid of Hexagonal cells

- Each BS is allocated a subset of carrier freqs
- Nearby BSs are allocated a different subset to avoid interference
- The total set is allocated to a small tessellating group of  $N$  neighboring BSs
  - Called "reuse cluster"
  - $1/N$  is the "reuse factor"
  - System capacity goes up by  $\frac{\text{Area}_{\text{reuse}}}{N \times \text{Area}_{\text{cell}}}$
- Used in FDMA & TDMA based systems
  - Not required in CDMA which has universal frequency reuse
- Cells idealized as hexagons
  - Real cell footprints are amorphous
  - Hexagon close to a circle
  - Not appropriate for micro-cells, highways etc.

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

## Reuse Cluster For Hexagonal Cells

- A tessellating group of N hexagonal cells is possible only iff



- Frequency Reuse Distance D
  - minimum distance between centers of co-channel cells
    - Depends on # of nearby cochannel cells, terrain, antenna height, transmit power etc.
  - for hexagonal cells,  $D = R\sqrt{3N}$ 
    - Where, R is the radius of hexagon (center to vertices)
  - Increasing N, and therefore D, reduce co-channel interference (assuming R and transmit power are invariant)
  - D/R is called the co-channel reuse ratio

## Determining Cluster Size

- If N is reduced while cell area is kept constant
  - more cluster needed to cover the service area
  - more channels per cell
  - more system capacity achieved
  - more co-channel interference co-channel cells are closer
- Goal is to maximize system capacity (or, capacity per unit area) subject to interference limitations
  - Minimum N such that carrier-to-interference ratio
    - $C/I \geq (C/I)_{\min}$
  - Reverse co-channel interference
    - Interference at a BS from co-channel MHs in other BSs
  - Forward co-channel interference
    - Interference at a MH from other co-channel BSs
  - Adjacent channel interference
    - From signals in adjacent channel due to imperfect filters
    - Don't assign adjacent frequencies to the same cell and if possible immediate neighbors


## Determining Cluster Size N

- Goal is maximize system capacity (or, capacity per unit area) subject to interference limitations
  - minimum N such that carrier-to-interference ratio
    - $C/I \geq (C/I)_{\min}$
  - reverse co-channel interference
    - interference at BS from co-channel MHs in other BSs
  - forward co-channel interference
    - interference at a MH from other co-channel BSs
  - adjacent channel interference
    - from signals in adjacent channels due to imperfect filters

## Calculating C/I

- Let  $i_0$  be the number of co-interfering cells, and noise be negligible
  - $C/I = \text{Carrier} / \text{All of the co-channel interference}$
  - Where C is the desired carrier power and  $I_i$  is the signal power of i-th interferer

$$\frac{C}{I} = \frac{C}{\sum_{i=1}^{i_0} I_i}$$

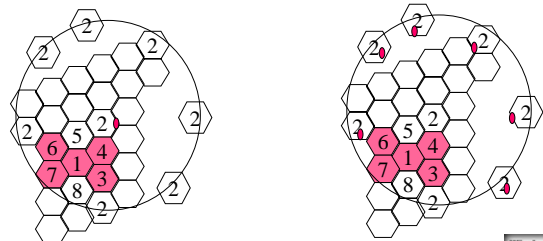

## Calculating C/I

- Recall:  $P_r(d) = P_t(d_0) \left(\frac{d_0}{d}\right)^n$
- For equal transmit powers and path loss exponents:  $\frac{C}{I} = \frac{D_0^n}{\sum_{i=1}^{i_0} D_i^n}$
- Assume:
  - $n=4$
  - worst case is at  $D_0 = R$  (when MH is at the fringe of its cell)
  - only the six "first-tier" co-channel cells are considered
  - $D_1 = D_2 = D_3 = D_4 = D_5 = D_6 = D$
- $C/I \sim (D/R)^4 / 6$  depends only on the ratio D/R


| system | (C/I) <sub>min</sub> | D/R | N |
|--------|----------------------|-----|---|
| AMPS   | 18 dB                | 4.6 | 7 |
| GSM    | 11 dB                | 3.0 | 4 |

## Microcells-Reducing Cell Area

- If cell area is reduced while N is kept constant
  - more clusters needed to cover the service area
  - C/I is unchanged because D/R is unchanged
  - system capacity grows quadratically with radius scale factor
- Small cells need lower RF transmitted power
  - longer battery, smaller mobile end-points
- Small cells result in higher cell-boundary crossing
  - more signalling overhead
  - performance degradation (more disruption)

## Channel Assignment in Cellular System

- ◆ Fundamental Problem
  - How to assign channels to requesting call at a BS ?
- ◆ Goal: Maximum Spectral Efficiency for a specified grade of service and a given degree of computational complexity
  - probability of new call blocking
  - probability of forced termination
  - link quality
- ◆ Maybe a "new" connection, or a connection undergoing "handoff"



## Channel Assignment Techniques

- ◆ Fixed
  - Basic Fixed
  - Simple borrowing
  - Hybrid borrowing with ordering
- ◆ Flexible
  - scheduled
  - predictive
- ◆ Dynamic
  - call-by-call optimized

## Fixed Channel Assignment


- ◆ Basic strategy
  - each cell is statically allocated a subset of channels
  - a requesting call in the cell can only use channel allocated to that cell
  - if no available channel in that cell, the call is blocked
  - MSC only informs new BS about hand-off, & keep track of serving channel

## Fixed Channel Assignment

- ◆ Variation
  - borrow channel from neighboring BSs if all channels busy at BS under MSC supervision, and only if does not cause interference borrowed channels are "locked"
  - hybrid channel assignment
    - ◆ two groups of channels: fixed and borrowable
    - ◆ ratio determined a priori depending on traffic estimate
  - borrow-with-channel-ordering
    - ◆ fixed-to-borrowable channel ration varied on changing traffic condition
    - ◆ channels are rank ordered


## Fixed Channel Assignment

- ◆ We might borrow from neighboring cells

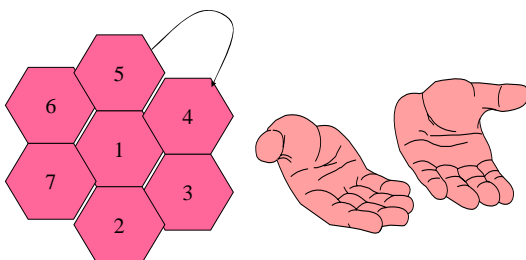

## Traffic & Resource


- ◆ Uniform Distribution

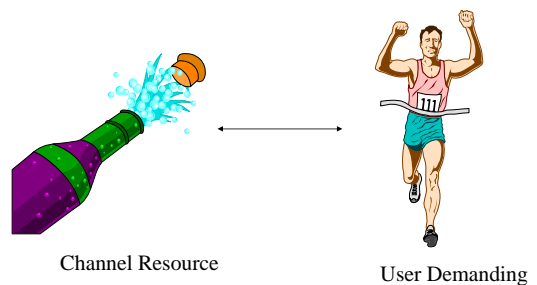

## Dynamic & Assignment

CS'E

- ◆ Maybe I should assign you based on current condition



## Issues to consider

CS'E



- ◆ Selected Cost
- ◆ Blocking Probability
- ◆ Reuse Distance
- ◆ CIR
- ◆ QoS (Quality of Service)
  - current value
  - handoff value

## Dynamic Channel Assignment (DCA)

CS'E

- ◆ Basic Features
  - channels not allocated to cells permanently
  - MSC allocated channel to a call from the global pool taking into account
  - Advantage: channel assignment may be retained across hand-off
  - Disadvantage: interruptions, deadlocks, instability

## Dynamic Channel Assignment

CS'E

- ◆ DCA algorithms differ in distribution of control among BSs and MSC
  - Centralized DCA
    - can do a globally optimized channel assignment and call rearrangement BSs need to communicate with MSC e.g. Maximum Packing
  - Decentralized & Fully Decentralized DCA
    - rely only on local monitoring to make channel assignments
    - require limited local communication among cluster of BSs

## Flexible Channel Assignment

CS'E

- ◆ Combine aspects of FCA and DCA
- ◆ Each cell is assigned a fixed set of channel
- ◆ Plus, a pool of channels is reserved for flexible assignment
  - MSC assigns these channels
- ◆ Flexible assignment strategies
  - Scheduled assignment: rely on known foreseeable changes in traffic pattern
  - Predictive assignment: based on measured traffic load at every BS

## MSC will pick up one for MH


CS'E

- ◆ Here you go !



## Flexible Channel Assignment

- ◆ Assign some of channel for minimum traffic requirement
- ◆ Keep all of the others in a service pool

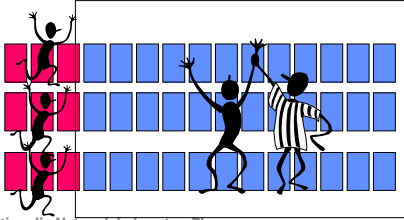


## Handoff Handling



Keep the QoS while the user moves


## Handling Handoffs

- ◆ Handoff
  - change the radio channel
    - ◆ the same base station
    - ◆ the new base station
  - due to
    - ◆ the radio link degradation
    - ◆ channel reorder



## What is going to happen ?

- ◆ The new cell must assign new channel
- ◆ We must reserve some hand off channel
- ◆ Some connection must be blocked !!



## Solutions for handoff

- ◆ Handoff Priority
  - guard channel for handoff
  - how much, inefficiency
- ◆ Queueing of Handoff request
  - take a seat for future handoff


## Guard Channel




Reserved for Handoff



## Thresholds



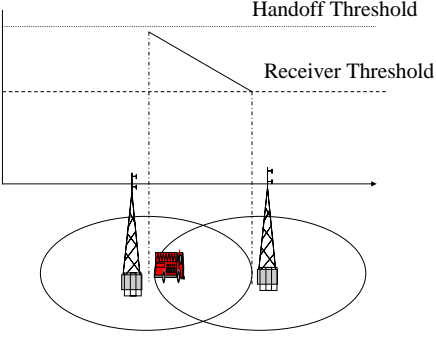


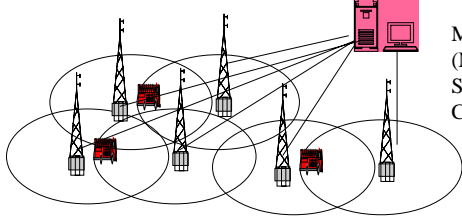
Handoff Threshold  
Receiver Threshold

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

## Who is going to take over Handoff




- ◆ Yourself (Mobile Users)
- ◆ Infrastructure Network
  - Base Station
  - Mobile Switching Center




MSC  
(Mobile Switching Center)

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

## Negotiating Procedure




- ◆ Base Station
  - detect the receiving signal from MH
  - send a measurement order
- ◆ Mobile Host
  - measure on demand
  - measure all the time

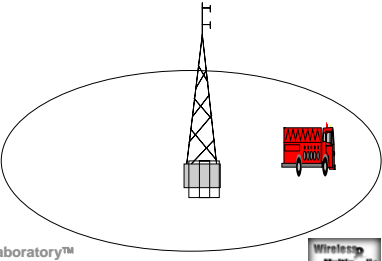

Wireless & Multimedia Network Laboratory™ Wireless Multimedia


## Hand off Procedure




- ◆ Decide the New Base Station
  - MSC picks the best for MH
  - MSC picks the candidate MH specify
- ◆ New Base Station decides to accept or not ?

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

## Call Queueing Scheme




- ◆ Queue for a channel, handoff threshold, receiver threshold

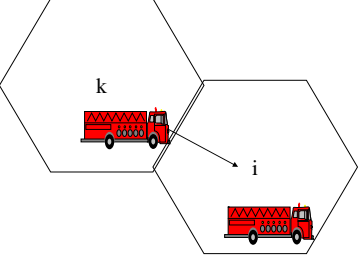


Wireless & Multimedia Network Laboratory™ Wireless Multimedia

## Trends in Hand over Design



- ◆ Hand over and Hand off are the same
- ◆ Small cells -> more hand over
  - allocate network resource to reroute the call to the new base station
  - if not quick enough, QoS will drop dramatically

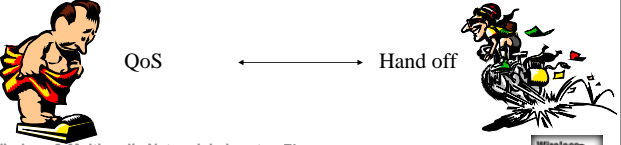


Wireless & Multimedia Network Laboratory™ Wireless Multimedia

## Mobility Solution

CS'E

- ◆ Multi-tiers
  - micro-cell and macro-cell
  - based on the speed
  - different schemes

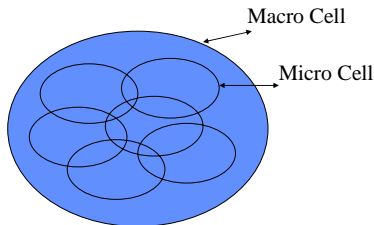



Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Velocity Estimation

CS'E

- ◆ Doppler Frequency is known -> Estimation of the velocity of the mobile users
- ◆ Mobility is estimated from the time spent in a cell



Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Handoff in Cellular Networks

CS'E

- ◆ Transfer of mobile to a new channel when it crosses cell boundary
  - identify new base station, assign new channel
  - hand-off initiated at a carefully chosen signal level
  - avoid triggering handoff due to momentary fades

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Hand-off

CS'E

- ◆ Handoff delay & interruption
  - dropped (or on hold) connection if signal too low before handoff processed
  - performance degradation (disruption) in data stream
- ◆ Prioritizing handoffs to reduce probability of dropped call
  - connection dropped if no spare channels in new cell
  - guard channel : subset of channels reserved for handoff requests works well with DCA
  - handoff queuing : time interval between handoff trigger & connection drop cell overlap, speed of mobile

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Handoff in Cellular Networks

CS'E

- ◆ Probability of unnecessary Handoffs
- ◆ Hard vs. Soft handoff
- ◆ Hand off rate
- ◆ Handoff also triggers rerouting in the network layer
- ◆ Handoff is tightly coupled to DCA, MAC, and Networking Routing

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Handoff Strategies (I)

CS'E

- ◆ Network controlled handoff (NCHO)
  - used in first generation analog cellular systems
  - link quality is only monitored by the serving BS and surrounding BS
  - handoff decision is made by the network (typically central agent)
  - handoff delays of several seconds (10) and infrequent link quality updates



Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Handoff Strategies (II)

CS'E

- ♦ Mobile assisted handoff
  - used in second generation digital cellular system
  - both the mobile and the serving BS measure link quality
  - only mobile measures link quality of alternate BSs
  - mobile periodically sends the link quality measurements to serving BS
  - handoff decision is made by the network
  - handoff delays of few seconds (1-2) and frequent link quality updates



## Handoff Strategies (III)


CS'E

- ♦ Mobile controlled hand off
  - used in some new digital cellular systems
  - link quality measurements as in MAHO
  - serving BS relays link quality measurements to mobile
  - handoff decision is made by the mobile
  - handoff delays of about 100 ms



## Handoff Scenario

CS'E

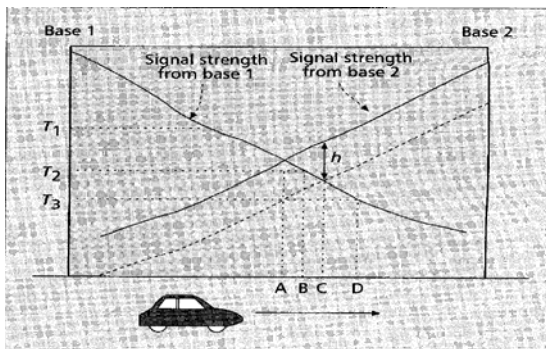

## Handoff Initiation Strategies


CS'E

- ♦ Relative signal strength
  - Always choose the strongest received BS
  - Too many unnecessary hand-offs
- ♦ Relative signal strength with threshold
  - Current signal < threshold, and other BS is stronger
  - May let MH stray too far into other cell; overlapping cell coverage
  - Effectiveness depends on knowledge of cross-over signal
- ♦ Relative signal strength with hysteresis (plus optionally dwell timer)
  - Hand-off only if new BS's signal is stronger by a hysteresis margin
  - Prevents ping-pong effect from rapid fluctuations
- ♦ Relative signal strength with hysteresis & Threshold
  - Hand-off only if current BS's signal below a threshold, and new BS's signal is stronger by the hysteresis margin
- ♦ Prediction techniques
  - Decide based on expected future value of received signal strength

## Handoff Queueing


CS'E

- ♦ Goal is to reduce handoff failure probability
  - Better to block a new call than to drop an existing one
  - Exploits overlap between cells to queue hand-off request in advance

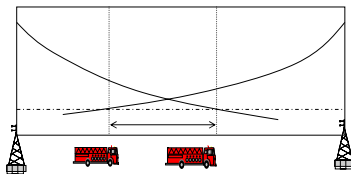

- ♦ Handoff request is issued according to handoff initiation strategy
  - Request is queued
  - Decision must be made (handoff or failure) while MH still in handoff interval

## Cell Splitting

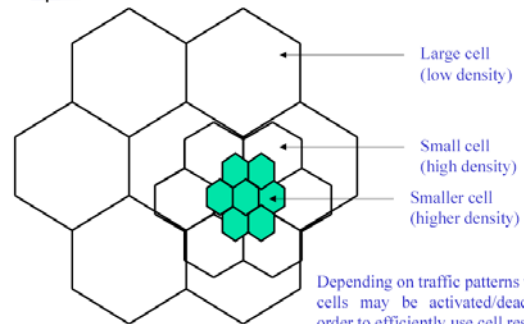

### Cell Sectoring by Antenna Design CS'E

(a) Omni      (b) 120° sector      (c) 120° sector (alternate)

(d) 90° sector      (e) 60° sector

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

### Cell Sectoring by Antenna Design CS'E

- Placing directional transmitters at corners where three adjacent cells meet

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

### Worst Case for Forward Channel Interference in Three-sectors CS'E

$$\frac{C}{I} = \frac{C}{q^{-\gamma} + (q + 0.7)^{-\gamma}}$$

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

### Worst Case for Forward Channel Interference in Six-sectors CS'E

$$\frac{C}{I} = \frac{C}{(q + 0.7)^{-\gamma}}$$

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

### Handoff Parameters CS'E

Mobility Support~ Handover

Channel Allocations: Reuse

Wireless & Multimedia Network Laboratory™ Wireless Multimedia


### Performance Index CS'E

- Traffic Request: (QoS)
  - New Call Probability
  - Handoff Call Probability
  - Traffic Requirements (Bandwidth, delay)
  - Call Holding Time
  - Dwell Time (Channel Occupation) for a handoff call or new call
  - Delay/Distance/Un-necessary handoff
- Mobility:
  - Resident time in a cell
  - Hand off rate
- Channel Resource:
  - Channel assignment
  - Blocking Rate (New Call blocking rate, Handoff blocking rate)

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

## IP-based 3G Wireless Network

CS'E

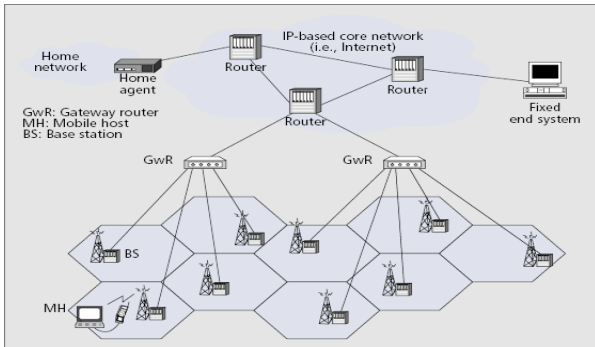


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Multi-path Effect (Time)

CS'E

- ◆  $RMS > \text{Symbol Duration}$ :
  - ISI (handled by Equalizer)
- ◆  $RMS < \text{Symbol Duration}$ :
  - More than one paths signal arrive (might have different phases)




Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Coherence Bandwidth (Bandwidth)

CS'E

- ◆ Coherence Bandwidth  $<$  BW of signal:
  - Frequency Selective Fading
- ◆ Coherence Bandwidth  $>$  BW of signal:
  - Flat Fading

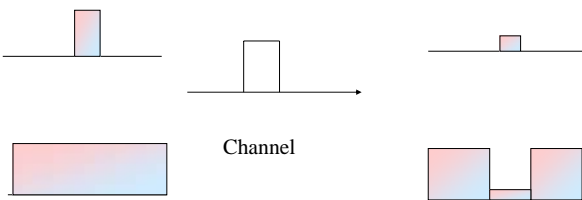


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## BS and BS list in MS

CS'E

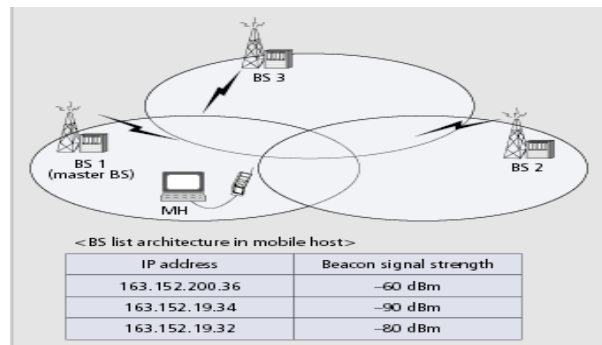

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia