

CSIE

無線網路多媒體系統 Wireless Multimedia System (Topic 4)

Medium Access Control II Bluetooth and WLAN

無線網路多媒體實驗室
Wireless Network & Multimedia Laboratory

Wireless & Multimedia Network Laboratory



CSIE

Topic III Agenda

- Wireless Link
 - Ad Hoc MAC
 - Bluetooth
 - 802.11
 - Cellular MAC
 - GPRS



Wireless & Multimedia Network Laboratory

Wireless Multimedia

CSIE

Demand for Medium Access Control



Voice Network
Data Network

Multimedia Network

Soft Resource
Flexible QoS

Wireless & Multimedia Network Laboratory

Wireless Multimedia

CSIE

Can we distinguish the traffic and offer different QoS?



Data: WWW, Email
Voice: telephone
Video: streaming


Calendar
Earphone
VideoClip

Wireless & Multimedia Network Laboratory

Wireless Multimedia

CSIE

Possible Solutions

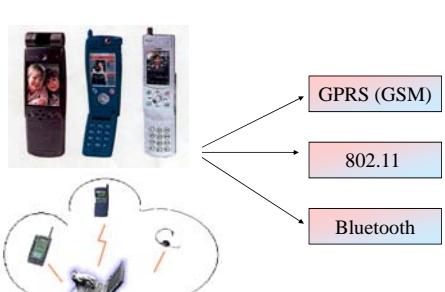

GPRS (GSM)

802.11

Bluetooth

Wireless & Multimedia Network Laboratory

Wireless Multimedia

CSIE

Basic Questions

- How to deliver my stuff safely?



Wireless & Multimedia Network Laboratory

Wireless Multimedia

Three Concerns

Control Resource

Acquiring Channel

Collision Free

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

CTS might be collided

- Whether CTS could be alive?

CTS

CTS

RTS

Exposed terminal

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

Basic Issues for Channel Access

- Channel Acquisitions?
 - Aloha (go ahead)
 - CSMA (signal sensing)
 - 802.11 (through RTS/CTS dialog, CW for backoff procedure $T_{backoff} = \text{Rand}(0, CW) * T_{slot}$)
 - Collision free (through effective CTS)
 - MACAW (through RTS/CTS/DS/DATA/ACK)
 - PCMA (through power control and busy tone)
- Collision Channel Transmissions
 - Centralized Control or Distributed Control
 - QoS
 - Cycle Time.
- Spread Spectrum
 - Interference suppression

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

Reading list for This Lecture

- Required Reading:
 - (Haartsen2000) Jaap C. Haartsen, "The Bluetooth Radio System", IEEE Personal Communications, February 2000
 - (Barry2001) Michael Barry, Andrew T. Campbell, Andras Veres, "Distributed Control Algorithms for Service Differentiation in Wireless Packet Networks", IEEE Infocom 2001
 - (Cai1997) Jian Cai and David J. Goodman, " General Packet Radio Service in GSM", IEEE Communication Magazine, Oct 1997

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

History of Mobile Ad Hoc Network (MANET)

1972, DAPA Prnet
CSMA

1994 GloMo
802.11

Global Internet

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

Commercial Applications of Ad hoc Network

- Conferencing
- Home Networking
- Emergency Services
- Personal Area Networks and Bluetooth
- Embedded Computing Applications
- Sensor Dust
- Automotive/PC Interaction
- Other Envisioned Applications

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

Technical and Market Factors for Ad hoc Networks

- Scalability
- Power Budget versus Latency
- Protocol Deployment and Incompatible Standards
- Wireless Data Rates
- User Education and Acculturation
- Additional Security Exposure
- Spotty Coverage



Wireless & Multimedia Network Laboratory™ 

Bluetooth

supported by Ericsson, Nokia, IBM, Toshiba, Intel..etc




Personal Area Network
Embedded Computing Applications
Ubiquitous Computing
<http://inrg.csie.ntu.edu.tw/wms>

Wireless & Multimedia Network Laboratory™ 

Smart Spaces and Devices

The Web of Pervasive Computing Devices

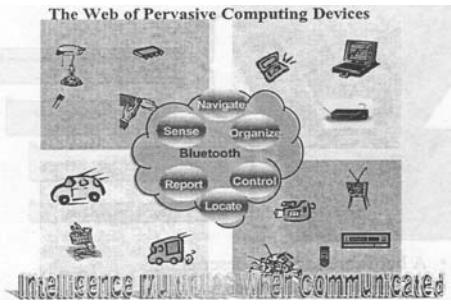


Intelligence in things that communicate

Wireless & Multimedia Network Laboratory™ 

Spread Spectrum vs. Narrow Band

- Spread Spectrum Signal Characteristics**
 - The bandwidth of the transmitted signal is much greater than the original message bandwidth
 - The bandwidth of the transmitted signal is determined by a spreading function (code), independent of the message, and known only to transmitter and receiver

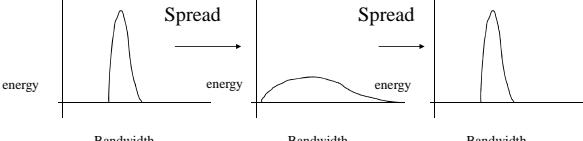

Wireless & Multimedia Network Laboratory™ 

Direct Sequence Spread Spectrum


To transmit a 0 the station use a unique “chip sequence”:



To transmit a 1 the station use the one's complement of its chip sequence:




Therefore if data is 1010 it will transmit:









Wireless & Multimedia Network Laboratory™ 







Frequency Hopping Spread Spectrum







- Transmitted signal is spread over a wide range of frequencies. (i.e. 2.400-2.485 GHz)
- Transmission usually hop 35 times per second.



Wireless & Multimedia Network Laboratory™ 

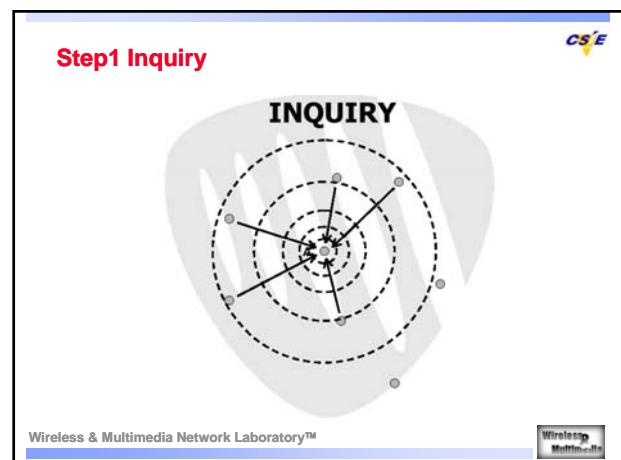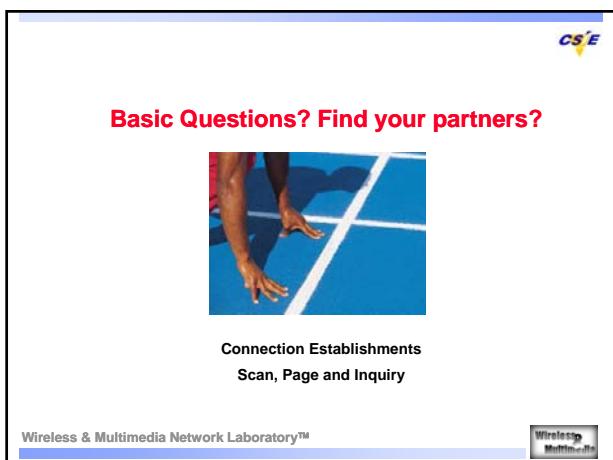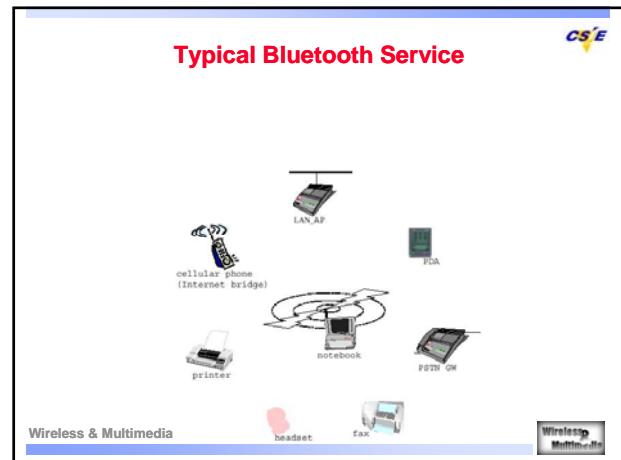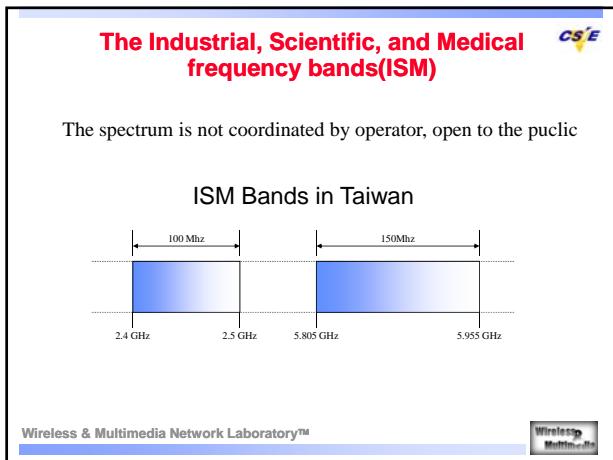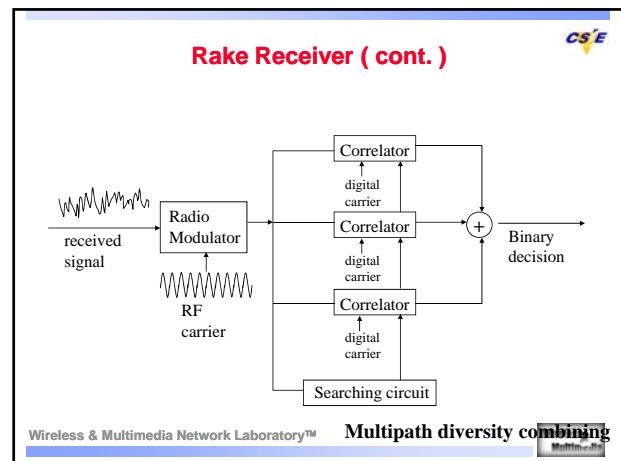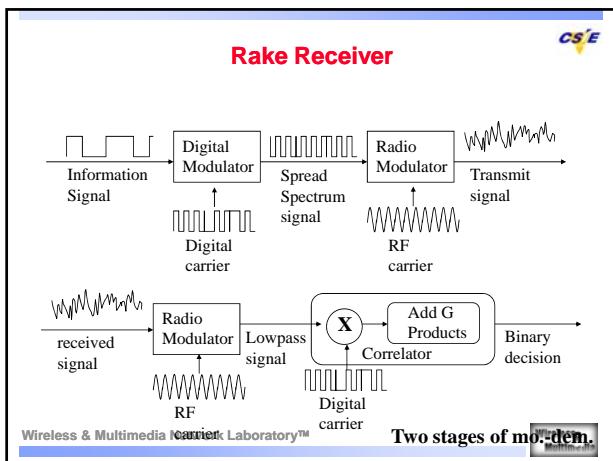

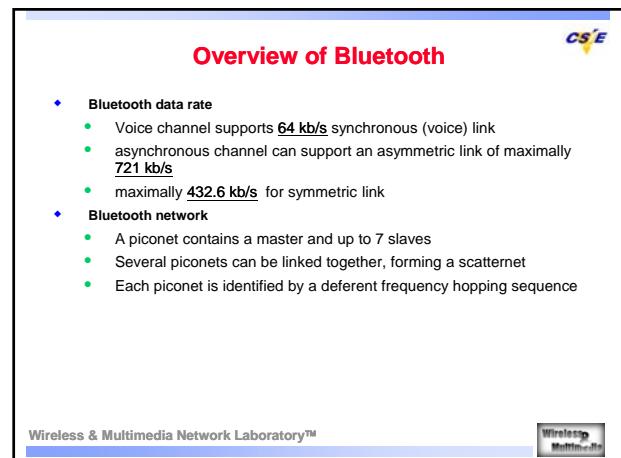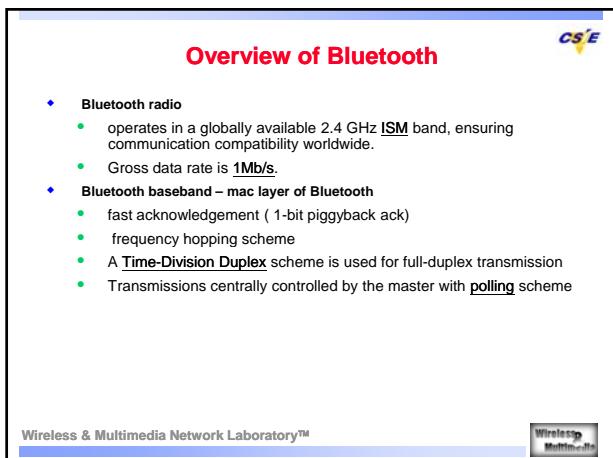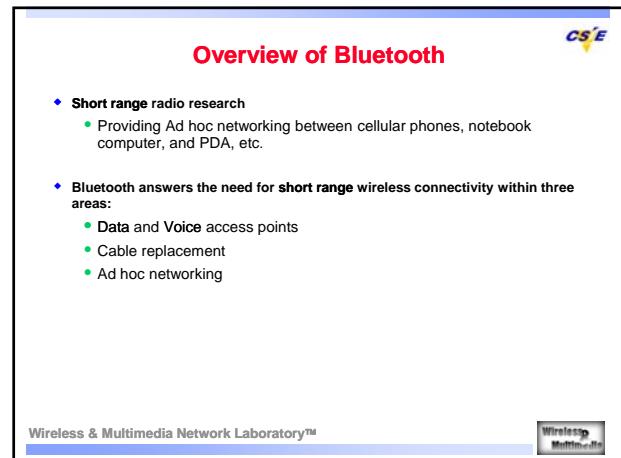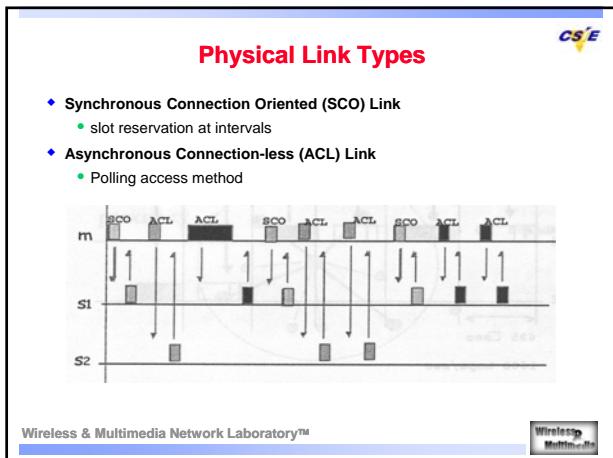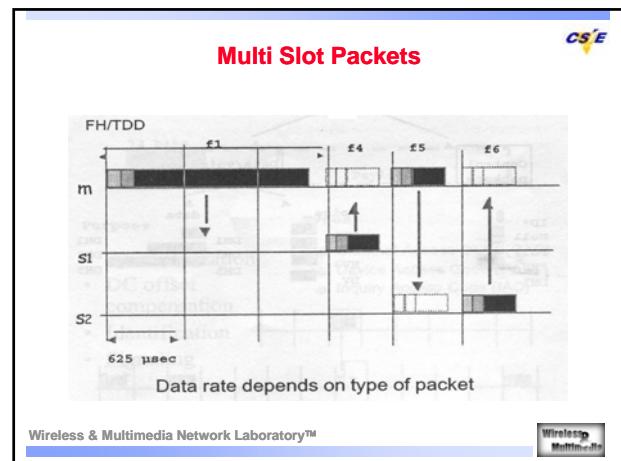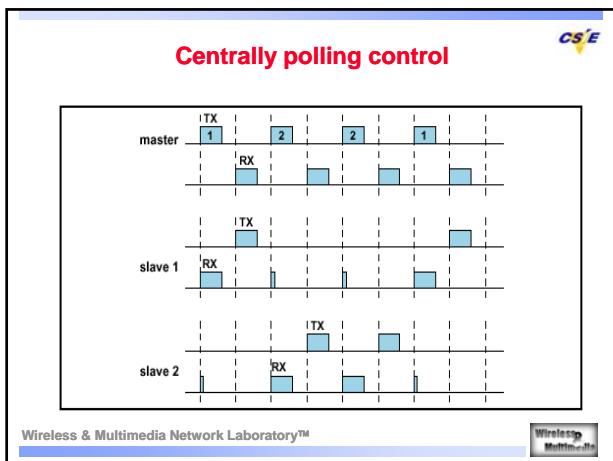

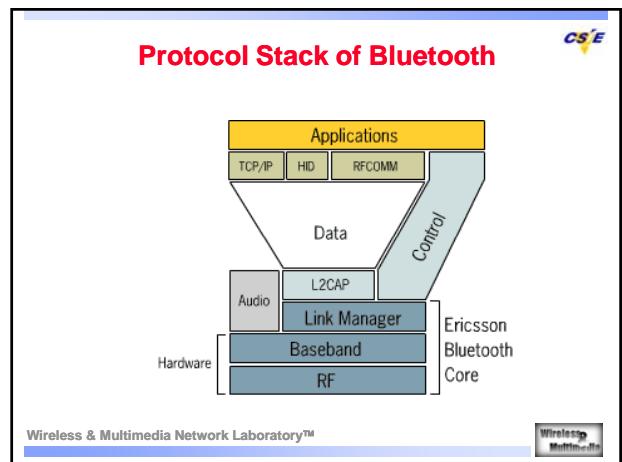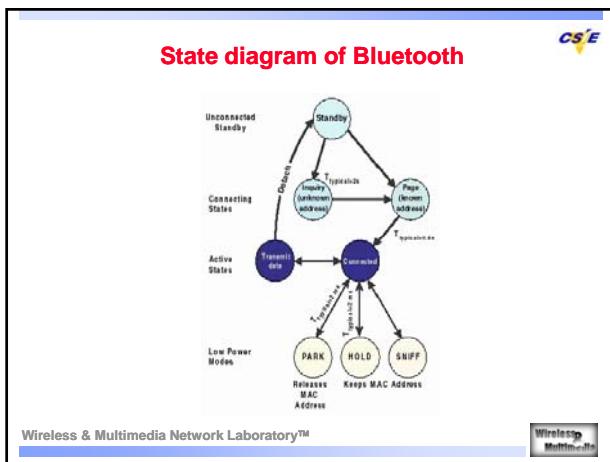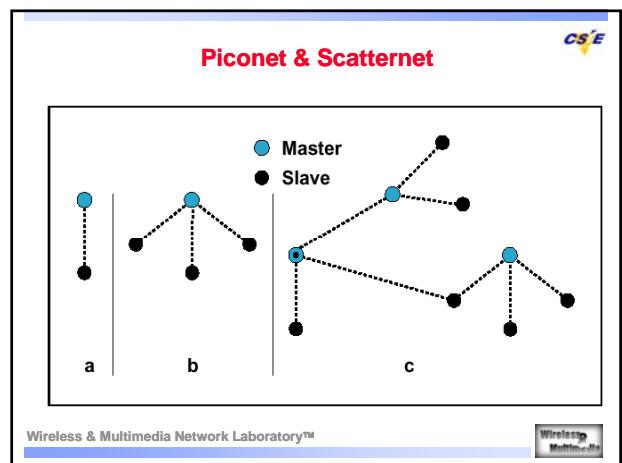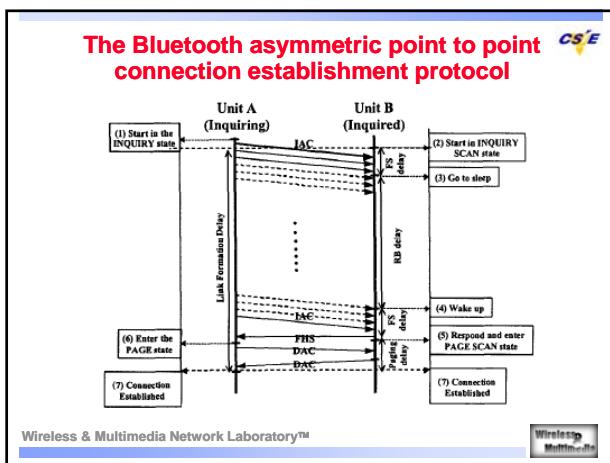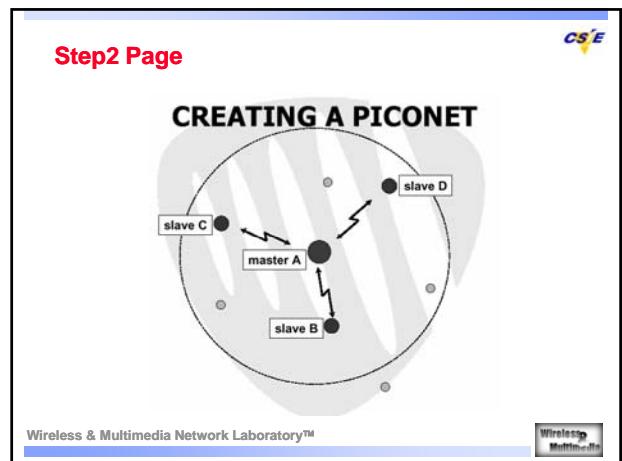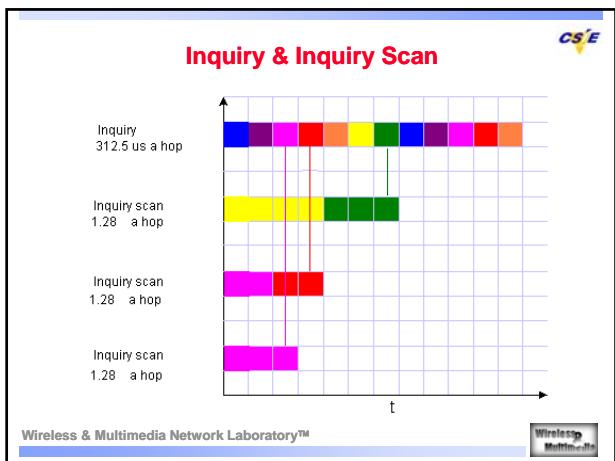


Scatternet establishment

- Start up procedure
 - Enter Inquiry and Inquiry scan state in term for a period of time
 - Discovering neighbors
 - Arrange neighbors table(self id included) with device id by increasing order, therefore, each unit get a sequence number, we call this number as pseudo candidate sequence number, because the lack of communication channel between units; self device id should be at 8th notch or before 8th notch
 - Enter paging frame

Wireless & Multimedia Network Laboratory™

Wireless Multimedia



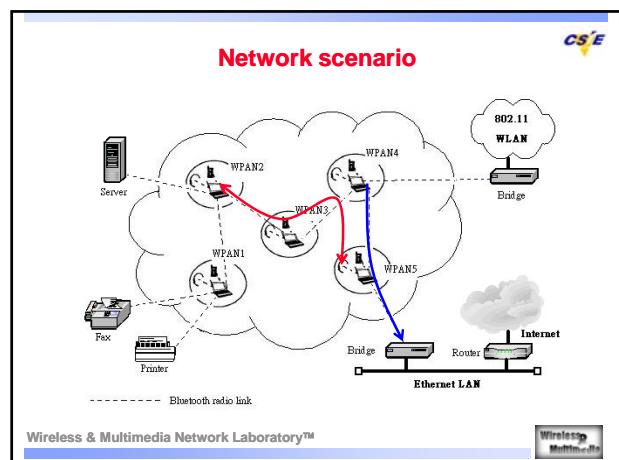








Bluetooth and UWB

UWB: Next Generation Technology for Wireless Personal Area Network

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

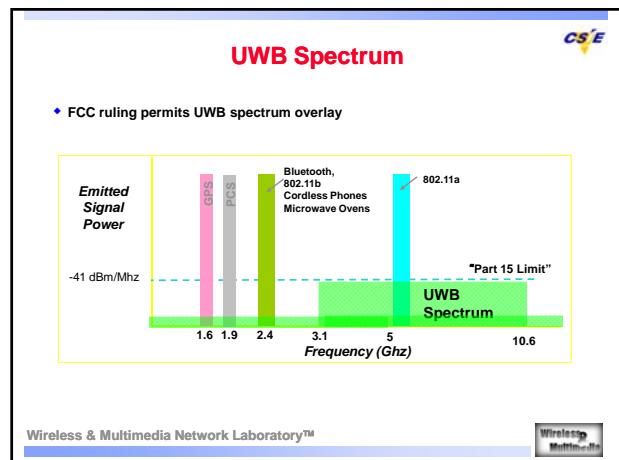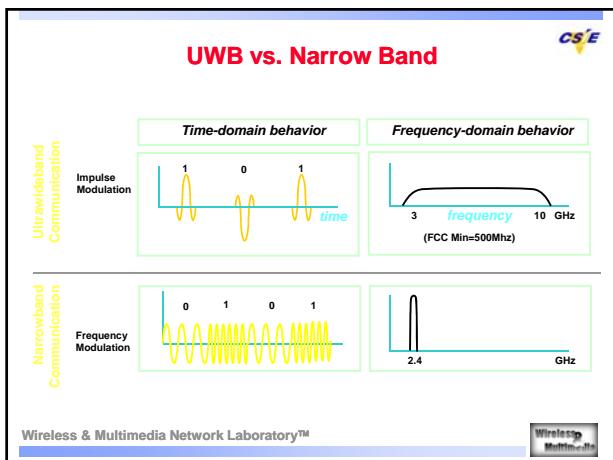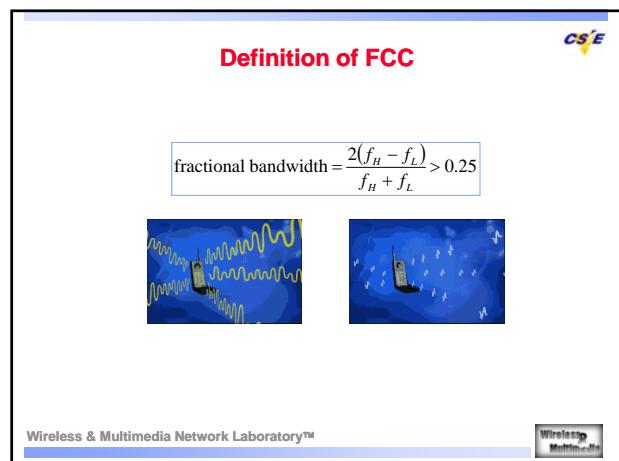

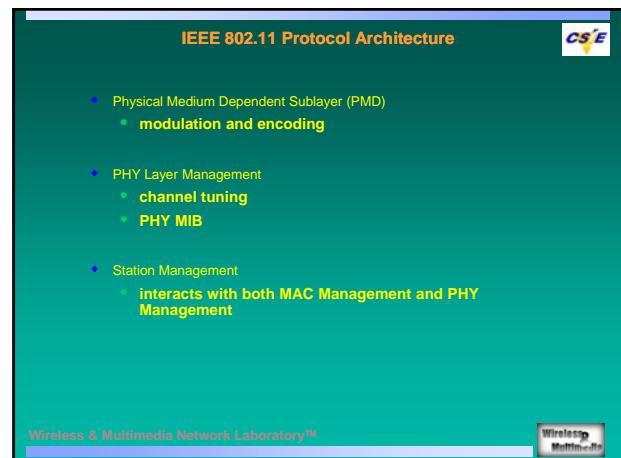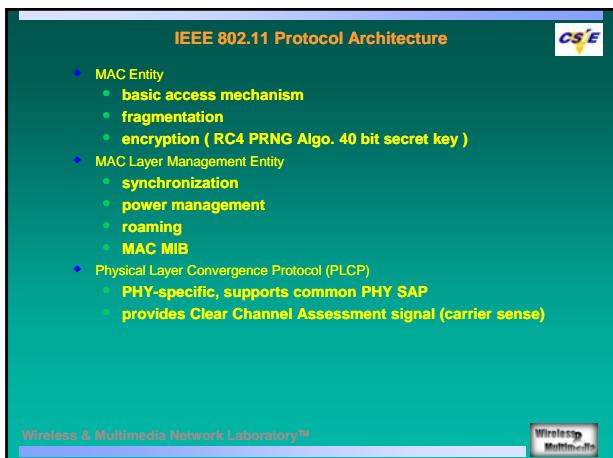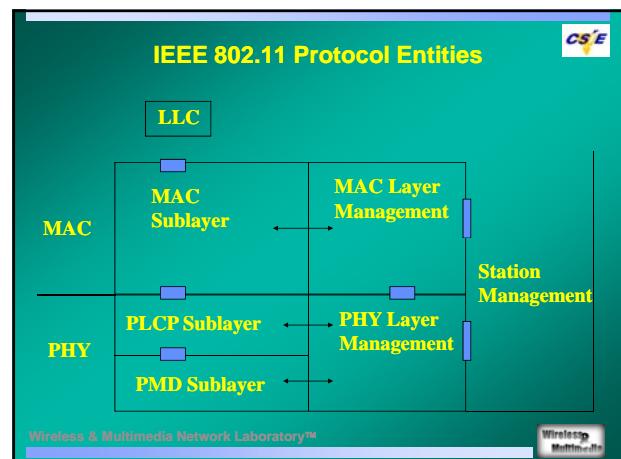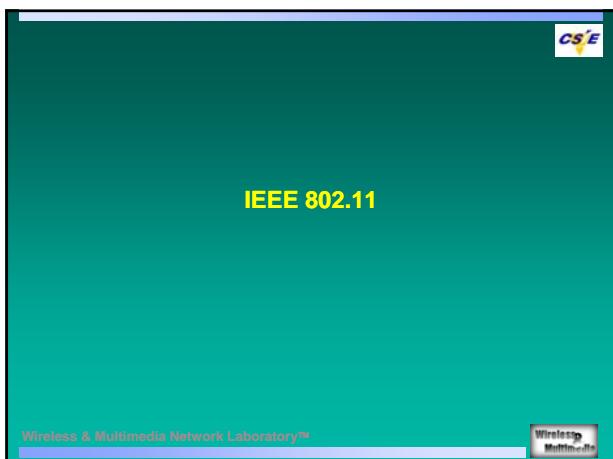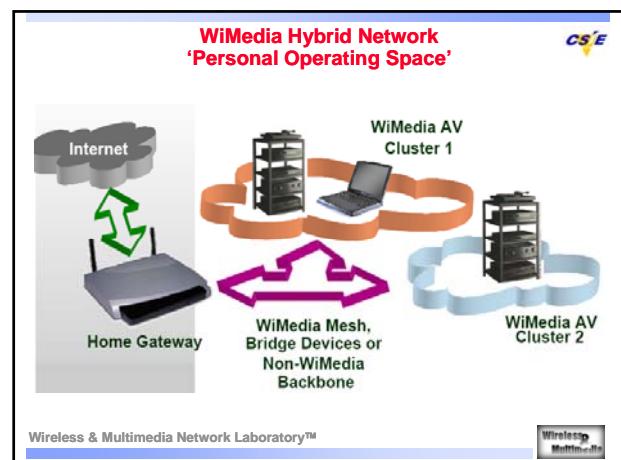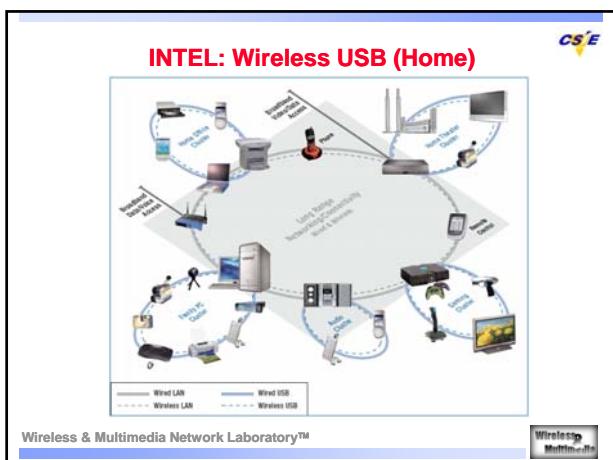

名詞解釋

- Basic Service Set (BSS) - is the fundamental building block of the IEEE 802.11 architecture. A BSS is defined as a group of stations that are under the direct control of a single coordination function , i.e., a DCF or PCF.

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

名詞解釋

- Coordination Function (CF) - That logical function which determines when a station operating within a Basic Service Set transmits and receives via the wireless medium.

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

IEEE 802.11 Wireless LAN Architecture

- Ad Hoc Network (Independent Basic Service Set Network : IBSS Network)
- Infrastructure Network

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

IEEE 802.11 Configurations - Independent

- Independent
 - one Basic Service Set - BSS
 - Ad Hoc network
 - direct communication
 - limited coverage area

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

IEEE 802.11 Configurations - Infrastructure

- Infrastructure
 - Access Points and stations
 - Distribution System interconnects Multiple Cells via Access Points to form a single Network.
 - extends wireless coverage area

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

Distribution System

Used to interconnect wireless cells
multiple BSSs connected together form an ESS, Extended Service Set

Not part of 802.11 standard
could be bridged IEEE LANs, wireless, other networks
Distribution System Services are defined

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

Access Point

Stations select an AP and Associate with it

- Support roaming
- Provide other functions
- time synchronization (beaconing)**
- power management support
- point coordination function

Traffic typically (but not always) flows through AP
direct communication possible

Wireless & Multimedia Network Laboratory

Wireless Multimedia

Services Provided by MAC

- Distribution System Service** - Divided into six kinds of service. Let data be received or sent between station and station.
- Station Service** - Divided into three kinds of service. Controlling access and privacy of IEEE 802.11 Wireless Network.

Wireless & Multimedia Network Laboratory

Wireless Multimedia

Distribution System Services

- Distribution** - Send data , which is in distribution system , to correct address
- Integration** - Exchange data between Distribution System and existent wired network

Wireless & Multimedia Network Laboratory

Wireless Multimedia

Distribution System Services

- Association**
- Mobility of Station
 - No-Transition**
 - Static
 - Local Movement
 - BSS-Transition**
 - ESS-Transition**

Stations must establish connection with AP before sending data to it. This action is provided by Association service.

Wireless & Multimedia Network Laboratory

Wireless Multimedia

Distribution System Services

- Reassociation**
- Requested by station
 - Move a current association from one AP to another**
 - Change connection type**

Wireless & Multimedia Network Laboratory

Wireless Multimedia

Distribution System Services

- Deassociation**
- Requested by station or AP
 - Stations leave the wireless network**
 - AP close or can't provide some services**

Station or AP can't refuse Deassociation sent by the other

Wireless & Multimedia Network Laboratory

Wireless Multimedia

Distribution System Services

- MSDU delivery
- Frames received or sent between stations and stations is provided by this service
- MSDU - MAC Service Data Unit

Wireless & Multimedia Network Laboratory

Station Service

- Authentication
 - Open System
 - Shared Key
- Deauthentication - When Authentication is cancelled, Association will be cancelled at the same time
- Privacy - The 802.11 embeds the WEP (Wired Equivalent Privacy) mechanism within the MAC that covers station-to-station transmission


Wireless & Multimedia Network Laboratory

Relationships between Services

There are two state variables (Authentication, Association) that create three station states:

- Initial State, Unauthenticated, Unassociated
- Authenticated, not Associated
- Authenticated and Associated

Wireless & Multimedia Network Laboratory

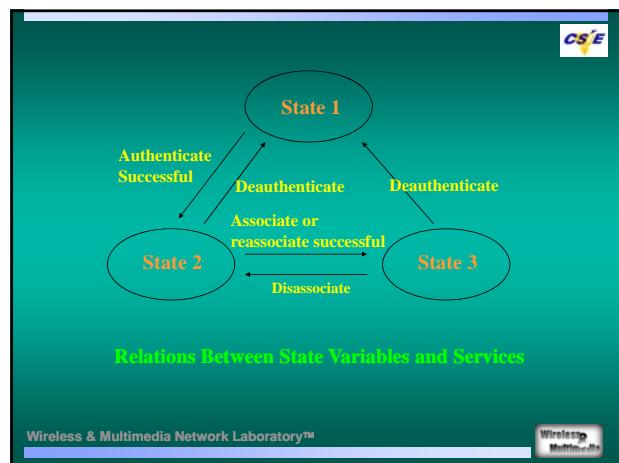

MAC Frame Formats

Bytes:

2	2	6	6	6	2	6	0-2312	4
Frame Control	Duration /ID	Addr 1	Addr 2	Addr 3	Sequence Control	Addr 4	Frame Body	CRC

802.11 MAC Header

Protocol Version	2	4	1	1	1	1	1	1
Protocol Version	Type	SubType	To DS	From DS	More Frag	Retry	Pwr Mgt	More Data
Frame Control Field								

- MAC Header format differs per Type:
 - Control Frames (several fields are omitted)
 - Management Frames
 - Data Frames
- Includes Sequence Control Field for filtering of duplicate caused by ACK mechanism.

Wireless & Multimedia Network Laboratory

Address Field Description

To DS	From DS	Address 1	Address 2	Address 3	Address 4
0	0	DA	SA	BSSID	N/A
0	1	DA	BSSID	SA	N/A
1	0	BSSID	SA	DA	N/A
1	1	RA	TA	DA	SA


- Addr 1 = All stations filter on this address.
- Addr 2 = Transmitter Address (TA)
 - Identifies transmitter to address the ACK frame to.
- Addr 3 = Dependent on To and From DS bits.
- Addr 4 = Only needed to identify the original source of WDS (Wireless Distribution System) frames.

Wireless & Multimedia Network Laboratory

CSMA/CA Protocol

- IEEE 802.11 use CSMA/CA protocol
- IEEE 802.11 provide two categories of basic access method
 - Distributed Coordination Function (DCF)**
 - Pointed Coordination Function (PCF)**
 - Provide Time Bounded Service




Wireless & Multimedia Network Laboratory






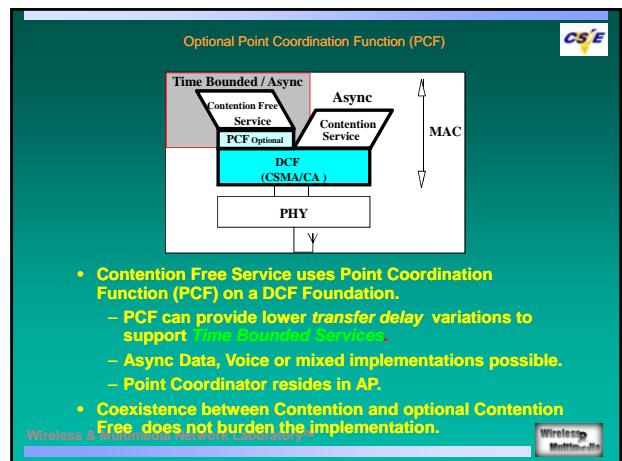


Distributed Coordination Function

- Priority access to the wireless medium is controlled through the use of Inter-Frame Space (IFS) time intervals between the transmission of frames. Three IFS intervals are specified in the standard.
 - Short-IFS (SIFS)**
 - Point Coordination Function-IFS (PIFS)**
 - Distributed Coordination Function-IFS (DIFS)**

Wireless & Multimedia Network Laboratory

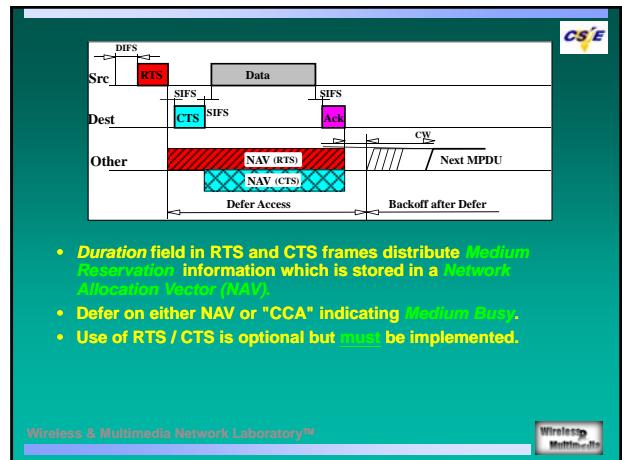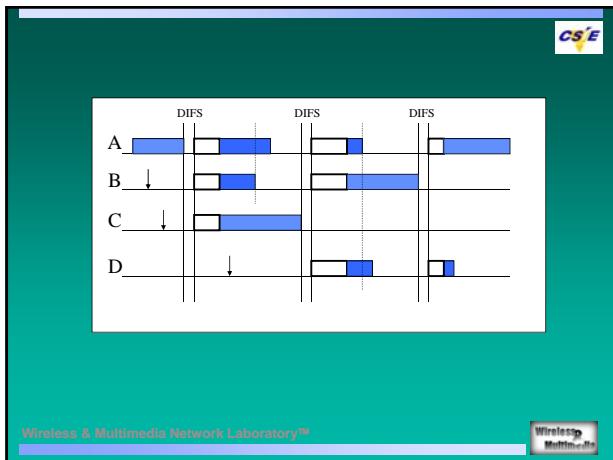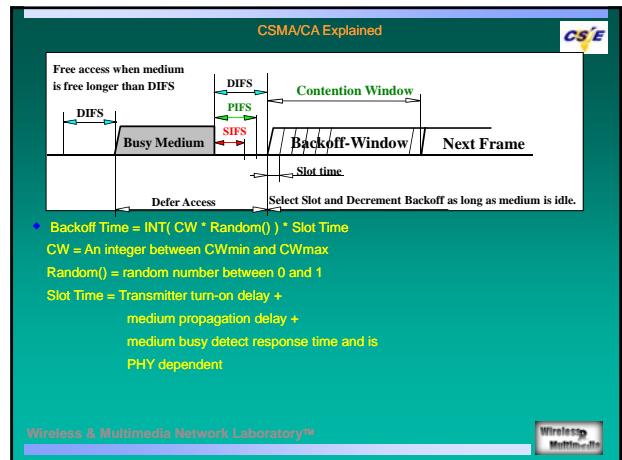

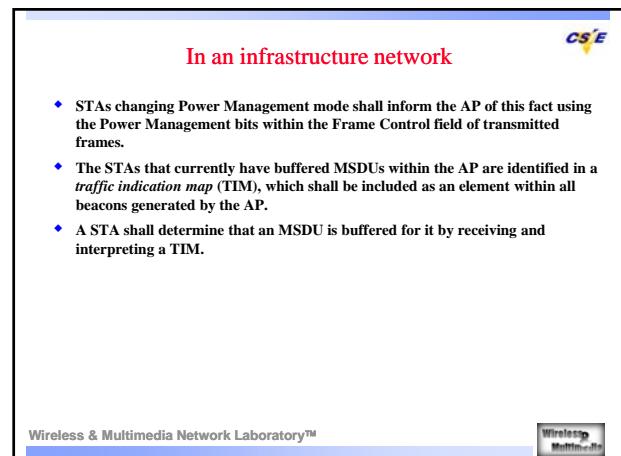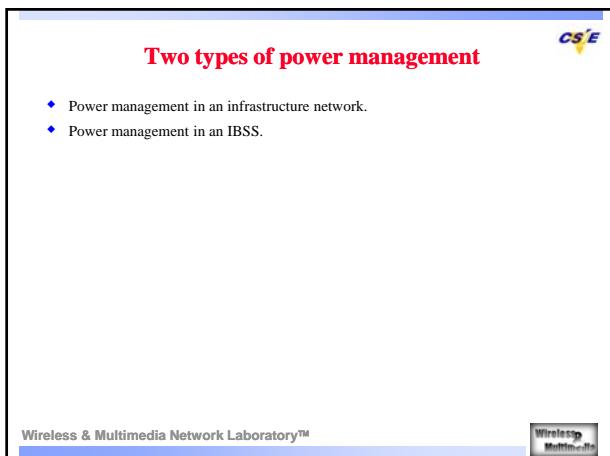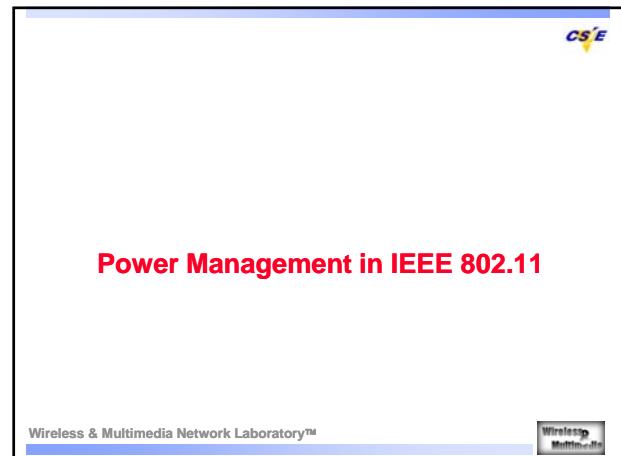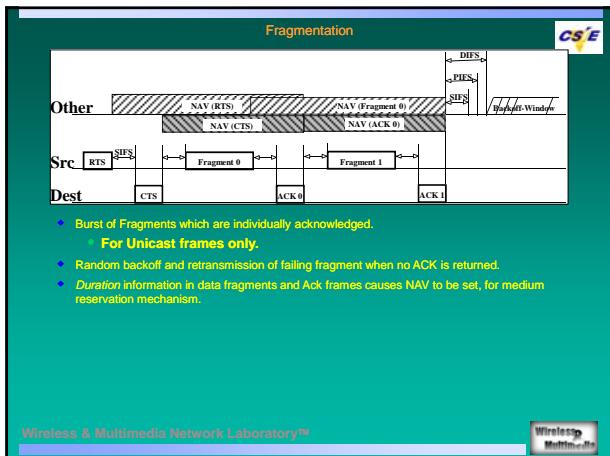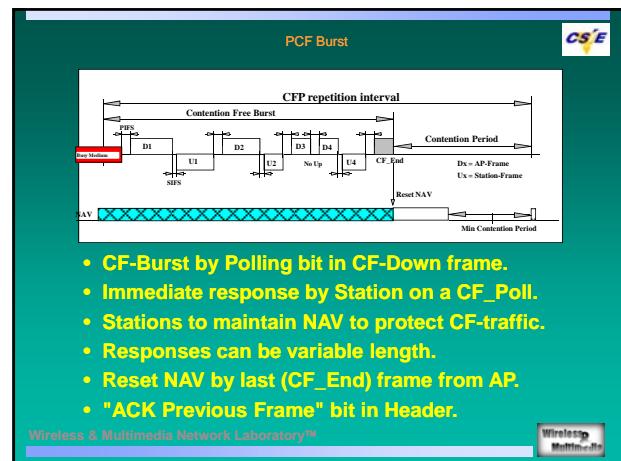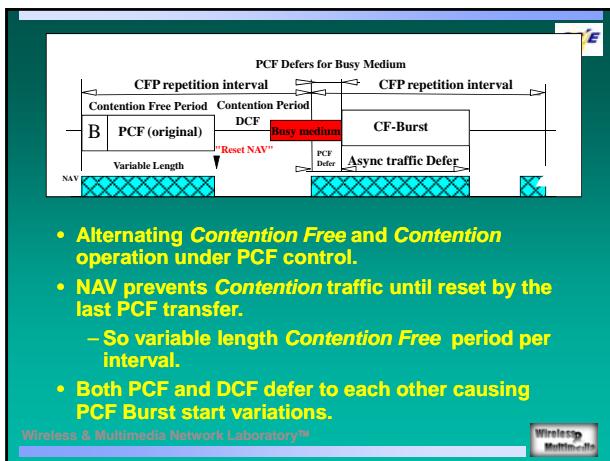

Cont.

- STAs operating in PS modes shall periodically listen for beacons, as determined by the STA's ListenInterval and ReceiveDTIMs parameters.
- If any STA in its BSS is in PS mode, the AP shall buffer all broadcast and multicast MSDUs and deliver them to all STAs immediately following the next Beacon frame containing a *delivery TIM (DTIM)* transmission.

Wireless & Multimedia Network Laboratory™



CS'08

STA Power Management modes

Active mode or AM	STA may receive frames at any time. In Active mode, a STA shall be in the Awake state. A STA on the polling list of a PCF shall be in Active mode for the duration of the CFP.
Power Save or PS	STA listens to selected beacons (based upon the ListenInterval parameter of the MLME-Associate.request primitive) and sends PS-Poll frames to the AP if the TIM element in the most recent beacon indicates a directed MSDU buffered for that STA. The AP shall transmit buffered directed MSDUs to a PS STA only in response to a PS-Poll from that STA, or during the CFP in the case of a CF-Pollable PS STA. In PS mode, a STA shall be in the Doze state and shall enter the Awake state to receive selected beacons, to receive broadcast and multicast transmissions following certain received beacons, to transmit, and to await responses to transmitted PS-Poll frames or (for CF-Pollable STAs) to receive contention-free transmissions of buffered MSDUs.

Wireless & Multimedia Network Laboratory™



AP TIM transmissions


- The TIM shall identify the STAs for which traffic is pending and buffered in the AP.
- Every STA is assigned an Association ID code (AID) by the AP as part of the association process.
- AID 0 (zero) is reserved to indicate the presence of buffered broadcast/multicast MSDUs.

Wireless & Multimedia Network Laboratory™



CS'08

Infrastructure power management operation (no PCF operating)

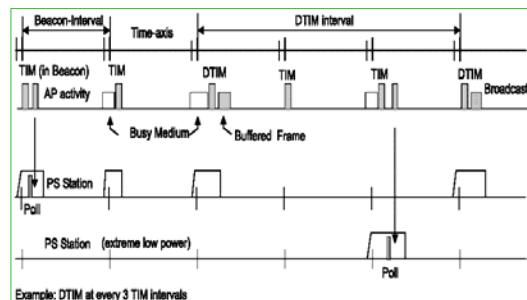

Wireless & Multimedia Network Laboratory™



AP aging function

- The AP shall have an aging function to delete buffered traffic when it has been buffered for an excessive period of time.
- The AP aging function shall not cause the buffered traffic to be discarded after any period that is shorter than the ListenInterval of the STA for which the traffic is buffered.
- The exact specification of the aging function is beyond the scope of this standard.

Wireless & Multimedia Network Laboratory™



CS'08


Power management in an IBSS

- The MSDUs that are to be transmitted to a power-conserving STA are first announced during a period when all STAs are awake.
- The announcement is done via an ad hoc traffic indication message (ATIM).
- A STA in the PS mode shall listen for these announcements to determine if it needs to remain in the awake state.

Wireless & Multimedia Network Laboratory™



Power management in an IBSS—Basic operation

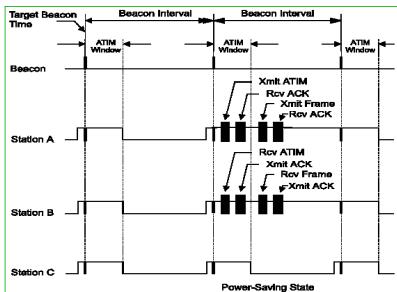

Wireless & Multimedia Network Laboratory™

CS' E

Initialization of power management within an IBSS

- A STA joining an existing IBSS shall update its ATIM Window with the value contained in the ATIM Window field of the IBSS Parameter Set element within the Beacon or Probe Response management frame received during the scan procedure.
- A STA creating a new IBSS shall set the value of the ATIM Window field of the IBSS Parameter Set element within the Beacon management frames transmitted to the value of its ATIM Window.

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

Cont.

- The start of the ATIM Window shall be the TBTT, defined in 11.1.2.2. The end of the ATIM Window shall be defined as TSF timer MOD BeaconInterval = ATIMwindow.
- The ATIM Window period shall be static during the lifetime of the IBSS.
- An ATIM Window value of zero shall indicate that power management is not in use within the IBSS.

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

CS' E

STA power state transitions

- If a STA is operating in PS mode, it shall enter the Awake state prior to each TBTT.
- If a STA receives a directed ATIM management frame containing its individual address, or a multicast ATIM management frame during the ATIM Window it shall remain in the Awake state until the end of the next ATIM Window.

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

Cont.

- If a STA transmits a Beacon or an ATIM management frame, it shall remain in the Awake state until the end of the next ATIM Window regardless of whether an acknowledgment is received for the ATIM.
- If the STA has not transmitted an ATIM and does not receive either a directed ATIM management frame containing its individual address, or a multicast ATIM management frame during the ATIM Window, it may return to the Doze state following the end of the current ATIM Window.

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

CS' E

Problem statement – multi-hop


- Clock synchronization
- Neighbor discovery
- Network partitioning

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

IEEE 802.11 PHY standard					
Standard	Date Issued	Available bandwidth (MHz)	Unlicensed frequency of operation (MHz)	No. of nonoverlapping channels *	Data rate per channel (Mbps)
802.11	1997	83.5	2.4 to 2.4835 DSSS, FHSS	3 indoor or outdoor	1, 2
802.11a	1999	300	5.15 to 5.35 OFDM (orthogonal frequency division multiplexing) 5.725 to 5.825 OFDM	4 indoor or outdoor 4 outdoor	6, 9, 12, 18, 24, 36, 48, and 54
802.11b	1999	83.5	2.4 to 2.4835 DSSS	3 indoor or outdoor	1, 2, 5, 6, and 11
802.11g	2003	83.5	2.4 to 2.4835 DSSS, OFDM	3 indoor or outdoor	1, 2, 5, 6, 9, 11, 12, 18, 24, 36, 48, and 54

Wireless & Multimedia Network Laboratory

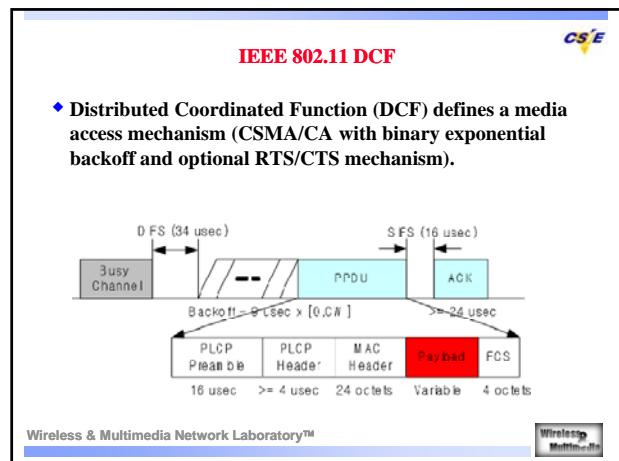

Wireless & Multimedia Network Laboratory



Notations	
T_{slot}	A slot time.
T_{SIFS}	SIFS time.
T_{DIFS}	DIFS time.
CW_{min}	Minimum backoff window size
T_p	Transmission time of the physical preamble.
T_{PHY}	Transmission time of the PHY header.
$L_{\text{H_DATA}}$	MAC overhead in bytes, i.e., 28 bytes.
L_{ACK}	ACK size in bytes, i.e., 14 bytes.
$T_{\text{H_DATA}}$	Transmission time of MAC overhead.
L_{DATA}	Payload size in bytes.
T_{DATA}	Transmission time for the payload.
T_{SYM}	Transmission time for a symbol.
t	Propagation delay.
R_{DATA}	Data rate.
R_{ACK}	Control rate.

Wireless & Multimedia Network Laboratory



Parameter of IEEE 802.11a & 802.11b					
Parameter	802.11a	802.11b	Parameter	802.11a	802.11b
T_{slot}	9 μ s	20 μ s	T_{SIFS}	16 μ s	10 μ s
τ	1 μ s	1 μ s	CW_{min}	15	31
T_p	16 μ s	144 μ s	T_{PHY}	4 μ s	48 μ s
T_{DIFS}	34 μ s	50 μ s	T_{SYM}	4 μ s	N/A

Wireless & Multimedia Network Laboratory



Assumption	
♦ The System must be at the best-case scenario:	
• Error-free channel	
• At any transmission cycle, only one active station which always has a packet to send and other stations can only accept packets and provide ACK.	

Wireless & Multimedia Network Laboratory



Throughput upper limit (TUL) & Delay lower limit (DLL)	
$\overline{CW} = \frac{(CW_{\text{min}} - 1)T_{\text{slot}}}{2}$(1)
$T_{D_{\text{DATA}}} = T_p + T_{\text{PHY}} + T_{\text{H_DATA}} + T_{\text{DATA}}$(2)
$T_{D_{\text{ACK}}} = T_p + T_{\text{PHY}} + T_{\text{ACK}}$(3)
$MT = \frac{8L_{\text{DATA}}}{T_{D_{\text{DATA}}} + T_{D_{\text{ACK}}} + 2t + T_{\text{DIFS}} + T_{\text{SIFS}} + \overline{CW}}$(4)
$MD = T_{D_{\text{DATA}}} + t + T_{\text{DIFS}} + \overline{CW}$(5)

Wireless & Multimedia Network Laboratory



IEEE 802.11b DATA & ACK transmission time


$$T_{D_{\text{DATA}}} = T_p + T_{\text{PHY}} + \frac{8L_{H_{\text{DATA}}} + 8L_{\text{DATA}}}{100000R_{\text{DATA}}} \dots \dots \dots (6)$$

$$T_{D_{\text{ACK}}} = T_p + T_{\text{PHY}} + \frac{8L_{\text{ACK}}}{100000R_{\text{ACK}}} \dots \dots \dots (7)$$

Wireless & Multimedia Network Laboratory™



PPDU frame format of IEEE 802.11a

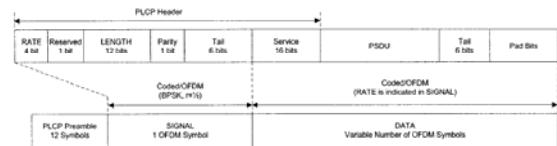

Wireless & Multimedia Network Laboratory™



IEEE 802.11a DATA & ACK transmission time

$$T_{D_{\text{DATA}}} = T_p + T_{\text{PHY}} + T_{\text{SYM}} * \text{Ceiling}(\frac{16 + 6 + 8L_{H_{\text{DATA}}} + 8L_{\text{DATA}}}{N_{\text{DBPS}}}) \dots \dots \dots (8)$$

$$T_{D_{\text{ACK}}} = T_p + T_{\text{PHY}} + T_{\text{SYM}} * \text{Ceiling}(\frac{16 + 6 + 8L_{\text{ACK}}}{N_{\text{DBPS}}}) \dots \dots \dots (9)$$

Wireless & Multimedia Network Laboratory™



TUL and DLL


$$\text{TUL} = \frac{8L_{\text{DATA}}}{2T_p + 2T_{\text{PHY}} + 2t + T_{\text{DIFS}} + T_{\text{SIFS}} + \frac{(CW_{\text{min}} - 1)T_{\text{slot}}}{2}} \dots \dots \dots (10)$$

$$\text{DLL} = T_p + T_{\text{PHY}} + t + T_{\text{DIFS}} + \frac{(CW_{\text{min}} - 1)T_{\text{slot}}}{2} \dots \dots \dots (11)$$

Wireless & Multimedia Network Laboratory™




Maximum throughputs and TUL (Mbps) of 802.11a

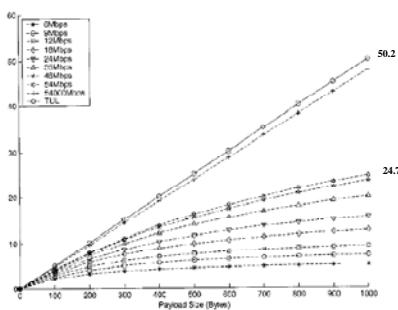

Wireless & Multimedia Network Laboratory™









Minimum delays and DLL (seconds) of 802.11a

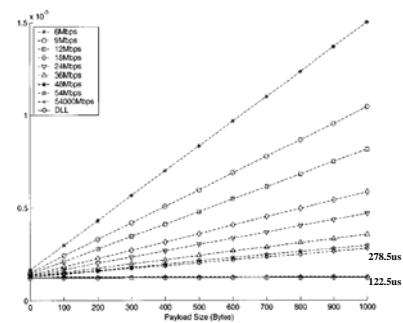

Wireless & Multimedia Network Laboratory™



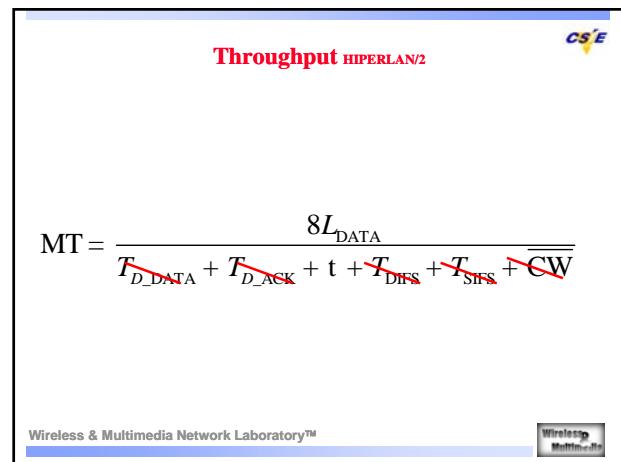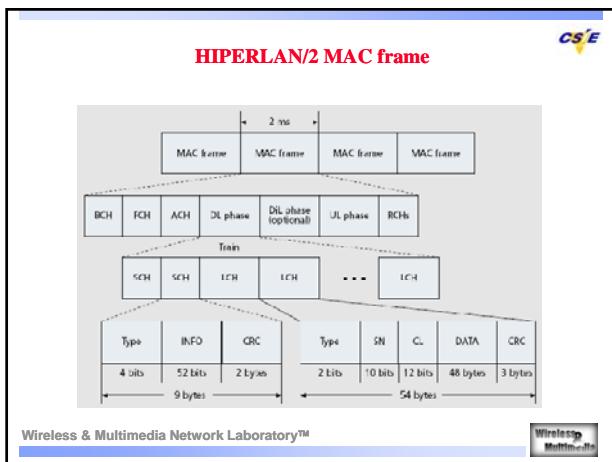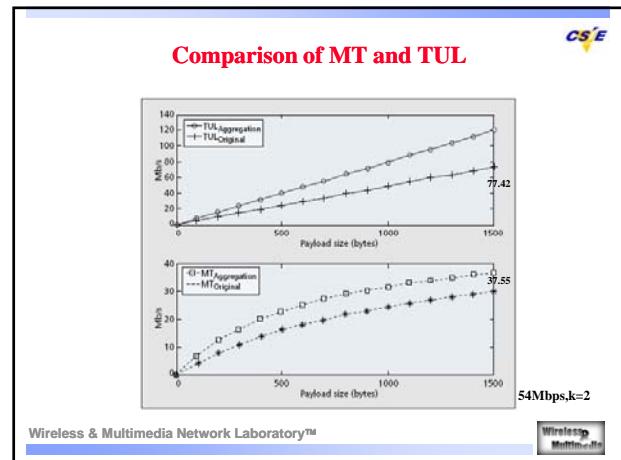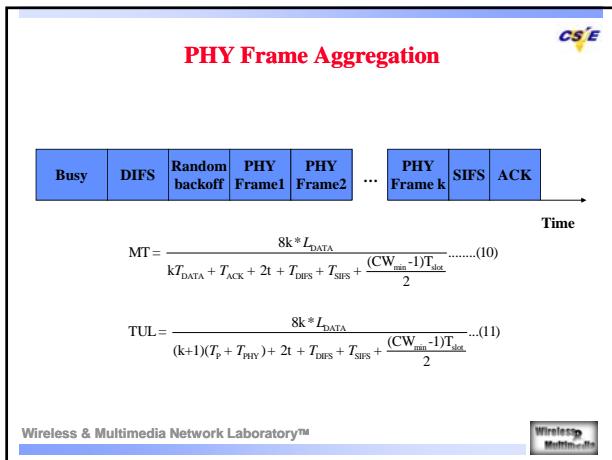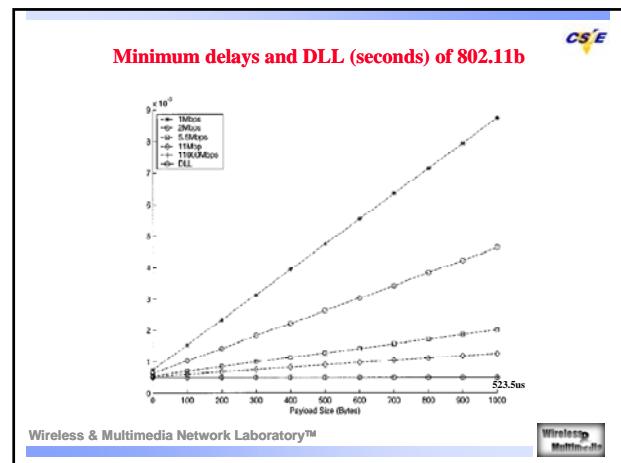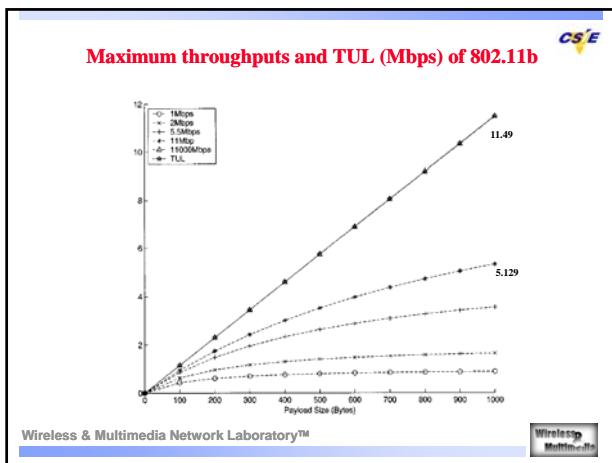

Obersvations



- ♦ The existence of the TUL and DLL shows that by simply increasing the data rate without reducing overhead, the enhanced throughput is bounded even when the data rate goes to infinite high.
- ♦ Reducing overhead is necessary for IEEE 802.11 standards to achieve higher throughput.