

無線網路多媒體系統 Wireless Multimedia System (Topic 3)


Wireless Link I: Fundamental issues of Multiple Access

吳曉光博士


<http://wmlab.csie.ncu.edu.tw/wms>




How to deal with Radio Propagation




Where are you from?

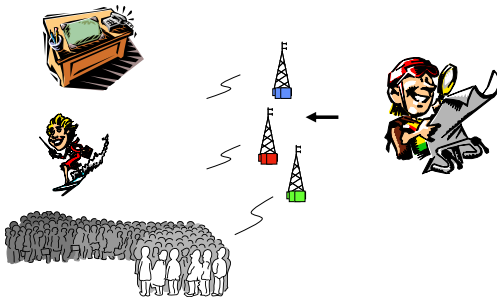

QoS and Multimedia Traffic Support

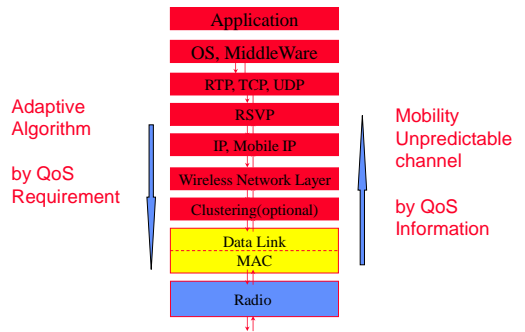

Multiple Access & Modulation

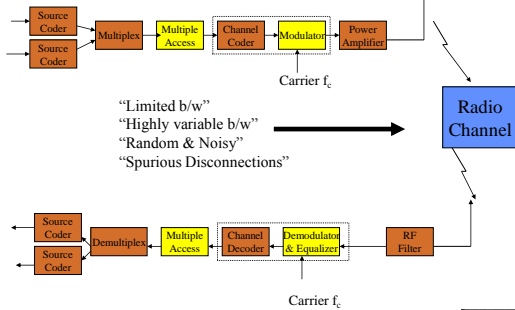

Topic III Agenda

- **Wireless Link**
 - Deployment of "Pervasive Computing" and "Seamless Telecom services"
 - Channel resource sharing in time, frequency, and code dimensions
 - Spread Spectrum-direct sequence, frequency hopping, interference resistance
 - Static techniques: TDMA, FDMA, CDMA
 - **Random access techniques:** MACA, MACAW, 802.11 etc



What kind of multiple access environments?



Wireless & Multimedia Network Laboratory™



Reading list for This Lecture

Required Reading:

- (Bhargavan94) V. Bhargavan, A. Demers, S. Shenker, L. Zhang, "MACAW: A Medium Access Protocol for Wireless LANs", Proceedings of SIGCOMM'94
- (J.J.97) L. Fullmer and J.J. Garcia-Luna-Aceves, Solutions to Hidden Terminal Problems in Wireless Networks, Proceedings of SIGCOMM'97
- (Jing 2006) J. Zhu, B. Metzler, X. Guo, Y. Liu, "Adaptive CSMA for Scalable Network Capacity in High-Density WLAN: A Hardware Prototyping Approach", Proceedings of Infocom 2006.

Further Reading

- (David 95) David D. Falconer, F. Adachi, and B. Gudmundson, "Time Division Multiple Access Methods for Wireless Personal Communications", IEEE Communication Magazine January 1995
- (Vadu2000) Vaduvur Bhargavan, "Achieving MAC Layer Fairness in Wireless Packet Networks", IEEE MobileCom2000
- (Songwu Lu2000) Haiyun Luo, Songwu Lu, Vaduvur Bhargavan, "A New Model for Packet Scheduling in Multihop Wireless Networks", IEEE MobileCom2000
- (J.J.2001) L. Bao, A New Approach to Channel Access Scheduling for Ad hoc Networks, IEEE MobileCom2001
- (Alex2001) A. Woo, David E. Culler, "A Transmission Control Scheme for Media Access in Sensor Networks", IEEE MobileCom2001
- (Gavin2001) G. Holland, N. Vaidya, P. Bahl, "A Rate-Adaptive MAC Protocol for Multi-Hop Wireless Network", IEEE MobileCom2001

Wireless & Multimedia Network Laboratory™



Pervasive Computing Projects




Packet Oriented -> Multimedia Traffic

Wireless & Multimedia Network Laboratory™



Smart Kindergarten (UCLA)

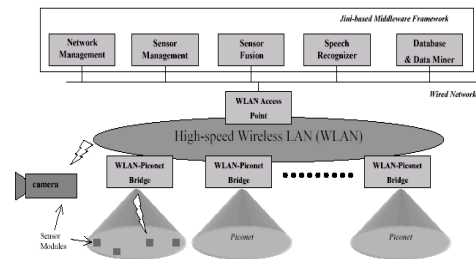


Wireless & Multimedia Network Laboratory™



Cricket Location-Support System (MIT)


- Beacon broadcast <-> Listeners
- Cricket Location-support system

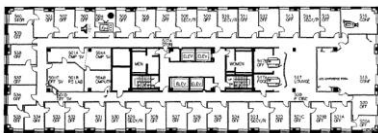

Wireless & Multimedia Network Laboratory™




Making Computer Disappear (Stanford) ADS (Appliance Data Services)

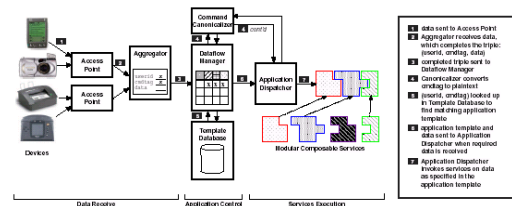

Wireless & Multimedia Network Laboratory™



M-Links (Xerox)

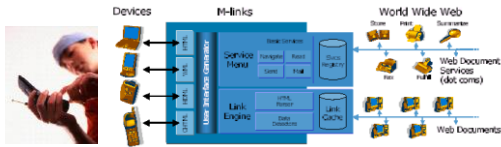

Wireless & Multimedia Network Laboratory™



Seamless Telecom Deployments



Circuit Services-> Data Services -> Multimedia


Wireless & Multimedia Network Laboratory™



2.5 G & 3 G



Packet Radio → System Integration
 Packet Backbone → Multimedia Services
 Mobile Computing

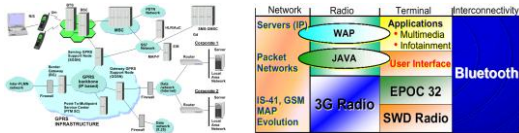

Wireless & Multimedia Network Laboratory™



Wireless Networking Technology



Telecom & Datacom

Circuit & Packet

Wireless & Multimedia Network Laboratory™



MAC Design Issues



- What kind of Resource we have?
- How much you need and how often and how regular you need?
- How often you will initial request?
- How much traffic you could afford?
- How much "Promise" you could provide?
- How fair you are going to be?
- Control or "Let it be"?
- Power Saving Issues?
- Complexity?



Wireless & Multimedia Network Laboratory™



Circuit Switch (Static Technique)



- Cellular System
 - AMPS
 - GSM
- Voice System
 - Continue Traffic
- Circuit Set up
 - Reserve A trunk



Wireless & Multimedia Network Laboratory™



HOW about Data



Wireless & Multimedia Network Laboratory™



Packet Radio



- ♦ **Packet Nature**
 - If we could deliver information by packet
 - Bursty Type of Traffic
 - Packet Size




Wireless & Multimedia Network Laboratory™



Multiple Access




- ♦ **Fundamental Problem**
 - How to share the Time-Frequency Space among multiple co-located transmitters?




Wireless & Multimedia Network Laboratory™



Cellular versus Ad hoc Models



Base-station
(infrastructure-centralized)




Peer-to-Peer
(ad hoc network-
Fully-connected vs multihop)

Wireless & Multimedia Network Laboratory™



Approaches to Wireless Multiple Access

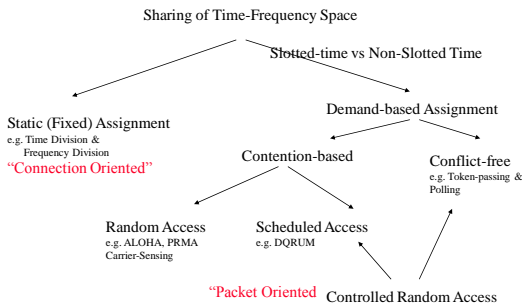

Wireless & Multimedia Network Laboratory™



Frequency Division & Time Division Duplexing



- ♦ **Frequency Division Duplexing (FDD)**
 - Two distinct frequency at the same time for the two directions
 - Frequency separation must be coordinated to allow cheap RF technology
 - Coordination with out-of-band users between the two bands
 - Geared towards providing individual frequencies for each user



- ♦ **Time Division Duplexing (TDD)**
 - Two distinct sets of time slots on the same frequency for the two directions
 - Time latency because only quasi-duplex
 - No need for RF duplexer




Wireless & Multimedia Network Laboratory™



Frequency Division Multiple Access (FDMA)

- Assign different frequency bands to individual users or circuits
 - Frequency band ("channel") assigned on demand to users who request service
 - No sharing of the frequency bands: idle if not used
 - Usually available spectrum divided into number of "narrowband" channels
 - Symbol time \gg average delay spread, little or no equalization required
 - Continuous transmission implies no framing or synchronization bits needed
 - Tight RF filtering to minimize adjacent band interference
 - Costly bandpass filters at basestation to eliminate spurious radiation
 - Usually combined with FDD for duplexing

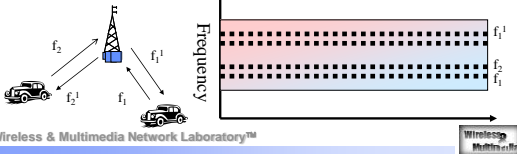

Example-AMPS Cellular System

- User FDMA/FDD
 - A channel is a pair of frequency duplexed simplex channels
 - Each simplex channel is 30 KHz
 - Simple channels are separated by 45 MHz (allow cheap RF duplexers)
 - Forward link 869-894 MHz, reverse link 824-849 MHz
 - Two carriers per market share the channels
- Number of supported channels in AMPS


$$N = \frac{B_{\text{total}} - 2B_{\text{guard}}}{B_{\text{channel}}} = \frac{(2 \cdot 50 \text{ MHz} - 2 \cdot 45 \text{ MHz})}{30 \text{ KHz}} = 416$$

- Problem: set of active users is not fixed
 - How is the FDMA/FDD allocated to a user who becomes active?
 - Static multiple access is not a complete solution.. Need a separate signalling channel with "demand-access".
 - Pure FDMA is basically "dead" in the digital world

Wireless & Multimedia Network Laboratory™

Time Division Multiple Access (TDMA)

- Multiple user share frequency band via cyclically repeating "time slots"
 - "channel"=particular time slot reoccurring every frame of N slots
 - Transmission for any user is non-continuous: buffer-and-burst digital data & modulation needed, lower battery consumption
 - Adaptive equalization is usually needed due to high symbol rate
 - Larger overhead-synchronization bits for each data burst, guard bits for variations in propagation delay and delay spread
 - Usually combined with either TDD or FDD for duplexing
 - TDMA/TDD: half the slots in a frame used for uplink, half downlink
 - TDMA/FDD: identical frames, with skew (why), on two frequencies

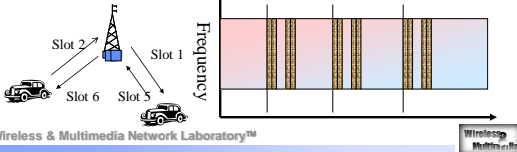

TDMA

- More features
 - Simply mobility & link control.. Snoop for other BSs during idle slots
 - Pulsating power envelop:interference with devices such as hearing aids
- Possible enhancements to basic TDMA to integrate non-voice services
 - Different # of slots per frame to different users (variable bit rate)
 - Dynamically reassign time slots for "bandwidth on demand"

Wireless & Multimedia Network Laboratory™

Packet Radio

- Packet Nature
 - If we could deliver information by packet
 - Bursty Type of Traffic
 - Packet Size

Wireless & Multimedia Network Laboratory™

CSMA with Collision Detection/Avoidance

- CSMA/CD:enhancement to slotted or unslotted CSMA schemes
- Node monitors its own transmission
 - If collision detected, transmission is aborted without waiting for a NACK backoff and re-transmission procedure started
 - A jamming signal may be sent to get everybody else to abort too
- Problem: does not work with RF wireless
 - Cannot easily sense the channel while transmitting
 - MH's signal will dominate, need different receiving and transmitting antenna patterns
- But, does work well with infrared wireless.. Directional receivers
- Wireless networks stick with ACK/NACK approach
 - Popular called CSMA/CA
 - 802.11

Wireless & Multimedia Network Laboratory™

CSMA with Collision Detection/Avoidance



- ◆ CSMA/CD: enhancement to slotted or unslotted CSMA schemes
- ◆ Node monitors its own transmission
 - If collision detected, transmission is aborted without waiting for a NACK backoff and re-transmission procedure started
 - A jamming signal may be sent to get everybody else to abort too
- ◆ Problem: does not work with RF wireless
 - Cannot easily sense the channel while transmitting
 - MH's signal will dominate, need different receiving and transmitting antenna patterns
- ◆ But, does work well with infrared wireless.. Directional receivers
- ◆ Wireless networks stick with ACK/NACK approach
 - Popular called CSMA/CA
 - 802.11

Wireless & Multimedia Network Laboratory™



RANDOM Access



- ◆ Give everybody freedom



Wireless & Multimedia Network Laboratory™



Hawaii Story



- ◆ University of Hawaii
- ◆ ALOHA
 - Hello and Goodbye



Wireless & Multimedia Network Laboratory™



ALOHA System




- ◆ If you want, transmit
- ◆ If no acks
 - wait a random time
 - transmit the same packet again
- ◆ Problem ?
 - Collision ?
 - A lot of Users ?



Wireless & Multimedia Network Laboratory™



Pure ALOHA Throughput

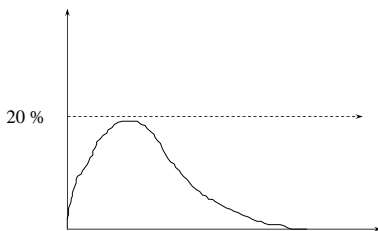


Traffic Load

Wireless & Multimedia Network Laboratory™



Slotted ALOHA Throughput

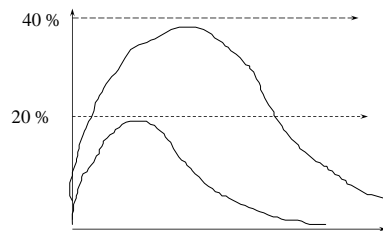


Traffic Load

Wireless & Multimedia Network Laboratory™



Slotted ALOHA

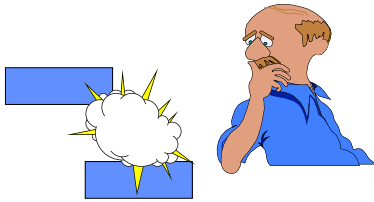

Maybe We could do some arrangement ?

Wireless & Multimedia Network Laboratory™



QoS & Delay



Wireless & Multimedia Network Laboratory™ DELAY



Whenever Users are many



- ◆ No one will succeed
- ◆ Collides all the time



Wireless & Multimedia Network Laboratory™



Reason



- ◆ No one really listen to other people
- ◆ No one really cares



Wireless & Multimedia Network Laboratory™



CSMA



- ◆ Most LANs use CSMA
- ◆ Carrier Sense
 - CSMA/CA: Collision Avoidance
 - CSMA/CD: Collision Detection

Wireless & Multimedia Network Laboratory™



CSMA




- ◆ Check if carrier is ok
- ◆ if the channel is free
 - transmit
- ◆ Otherwise, if the channel is busy
 - wait a random time and try again
 - Back of a random time

Wireless & Multimedia Network Laboratory™



CSMA

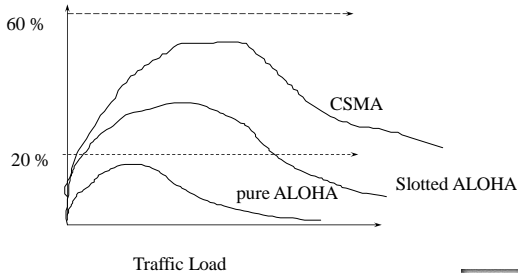



Wireless & Multimedia Network Laboratory™



Multimedia support? Integrated CSMA/TDMA MAC Protocol



- Hybrid of reservation and Random Access
- A frame is segmented into:
 - Two reservation intervals for isochronous traffic
 - One interval for random access traffic

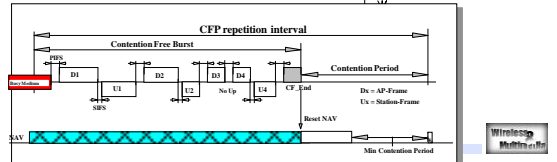

Can Support AP or Ad Hoc



- AP (Access Point)
- Ad HOC
 - Coordination Function will be distributed among all of the nodes of the ad hoc network


Wireless & Multimedia Network Laboratory™



Challenge of Wireless Network



- Does "listen before you talk" work?

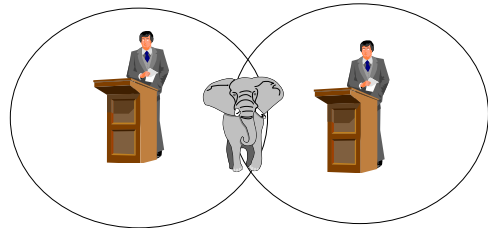


Wireless & Multimedia Network Laboratory™



Hidden Terminal



- Due to transmission range

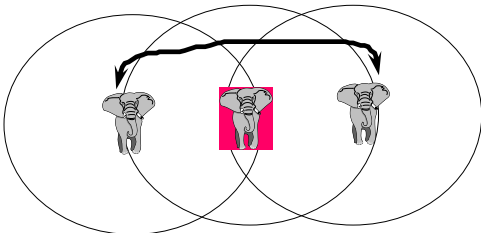

Wireless & Multimedia Network Laboratory™




Carrier Sense Multiple Access (CSMA)



- To avoid collision, sender senses the carrier before transmission. But collision occurs at the receiver not transmitter.
- Hidden Terminal -


- Exposed Terminal -



Wireless & Multimedia Network Laboratory™



Multiple Access Collision Avoidance (MACA)




- Request-To-Send (RTS) packet: A to B.
- Clear-To-Send (CTS) packet: B to A.
- Node overhearing RTS will defer until A receive CTS.
- Node overhearing CTS will defer until B receive data.
- What do the above two features achieve (Hidden Terminal and Exposed Terminal)?



Hidden Terminal Problem Still Exists (1)




- Data packet still might suffer collision

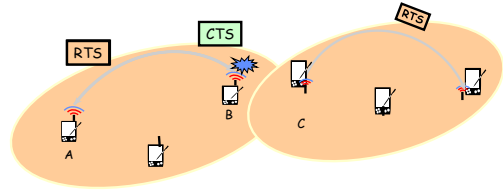

Hidden Terminal Problem Still Exists (2)




- Data packet still might suffer collision

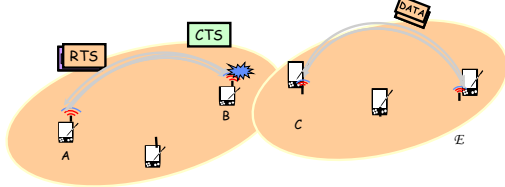

Exposed Terminal Problem Still Exists



- Node C can not receive CTS

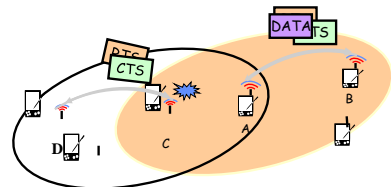

MACAW



Features

- Backoff algorithm.
- Multiple Stream model.
- Basic Message Exchange
 - ACK
 - DS
 - RRTS



Backoff Algorithm




- The algorithm used in MACA: Binary Exponential Backoff (BEB).
 - Maintains a Backoff counter (BO)
 - BO is doubled after every collision
 - Reduced to minimal BO after every successful RTS-CTS exchange.
 - Sender waits for an interval chosen randomly between 1 and BO.
 - $F_{min}(x) = \text{MIN} [2x, BO_{max}]$
 - $F_{max}(x) = BO_{min}$
- Results in unfair sharing of bandwidth.



Modifications used in MACAW


1. After every successful transmission all pds are made to have the same BO. (What is the problem with this?)
2. Gentler adjustment (MILD):
 - Upon collision $F_{\text{acc}}(x) = \text{MIN} [1.5x, \text{BO}_{\text{max}}]$.
 - Upon success $F_{\text{acc}}(x) = \text{MAX} [x-1, \text{BO}_{\text{min}}]$.

RTS/CTS/DATA/ACK



Problems in Contention-based Wireless Multiple Access

- ◆ Near-Far effect-characterized by capture ratio of the receiver
 - Strongest (near by) transmitter can capture the intended receiver
 - Weaker (far away) transmitters get ignored by the receiver
 - Depends on receiver and modulation used
 - Fairness terminal problem
- ◆ Hidden terminal problem
 - Terminal "hidden" from the transmitter may disrupt the receiver
 - Makes carrier sensing ineffective
 - A cannot detect collisions at B due to transmission from C
 - Solve by using RTS/CTS control frame to reserve medium




More on RTS/CTS

- ◆ RTS/CTS serve to "reserve" the medium
 - RTS contains length of proposed transmission
 - CTS also contains length of proposed transmission
 - MHS overhearing RTS defer all transmissions until after CTS would have finished (including receiver turnaround time)
 - MHS overhearing CTS defer for length of data packet transmission
 - Retransmission happen only if no CTS is received in reponse to RTS
- ◆ Binary exponential backoff (BEB) has problems
 - Does not provide fairness if every MH generate enough traffic to consume the channel
 - After collisions, the less-backed-off mobile wins eventually all but one MD are backed-off to BO_{max}

Exposed Terminal Problem

- ◆ C will sense channel busy, and defer, but doesn't need to
 - The C to D transmission can take place but is delayed

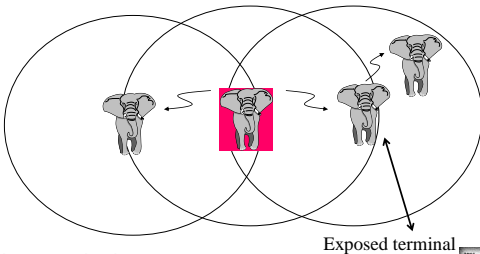

CSMA/CD?

- ◆ Collision Detection ?
- ◆ If a collision is detected, stop transmitting the present packet ?
- ◆ Is CSMA/CD possible ?
 - transmit and receive at the same time ?
 - CSMA wireless network, transmit and receive at the same frequency band
 - unlike Cellular System, uplink and downlink

IEEE 802.11 MAC



- Support for multiple access PHYs; ISM band DSSS and FHSS, IR @ 1 and 2 Mbps
- Efficient medium sharing without overlap restrictions
 - Multiple networks in the same area and channel space
 - Distributed Coordination Function: using CSMA/CA
 - Based on carrier sense mechanism
- Robust against interference (e.g. co-channel interference)
 - CSMA/CA+ACK for unicast frame with MAC level retransmission
- Protection against Hidden terminal problem: Virtual Carrier Sense
 - Via parameterized use of RTS/CTS with duration information
- Provision for Time Bounded Services via Point Coordination Points
- Configurations: ad hoc & distributed system connecting access points
- Mobile-controlled hand-offs with registration at new basestation



Enhanced MAC Techniques



- Token Bus and Token Ring
 - Token are passed among nodes
 - How about wireless network?
 - Nodes might leave?
 - Break the Order
 - Take away the token



Basic Scenario

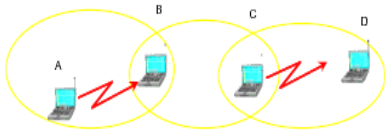


Fig. 1. A is sending a packet to B when C should decide whether to transmit to D.



Hidden and Exposed Stations

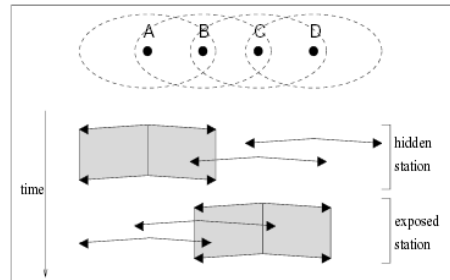


Figure 1: Hidden and Exposed Stations



Capture Effect/Near Far Problem


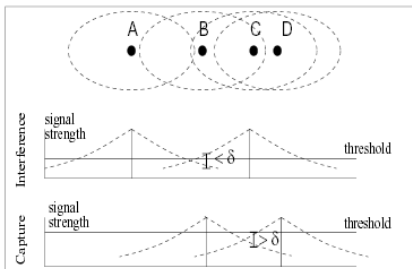



Figure 2: Interference and Capture



802.11 E

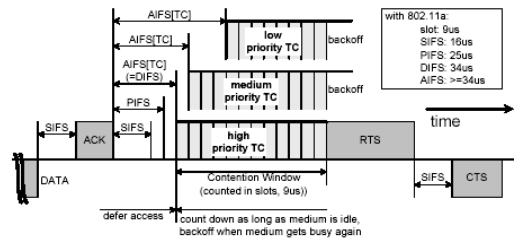

802.11

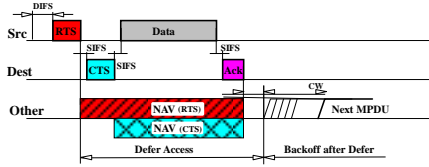

Interference Issue for CSMA/CA







Fig. 1. Effectiveness of RTS/CTS handshake when d is larger than $T_{S/N}^{-1} R_{th}$ and smaller than R_{th} . Fig. 2. Effectiveness of RTS/CTS handshake for TWO-RAY GROUND model and SNR threshold as 10.




QoS issue for 802.11

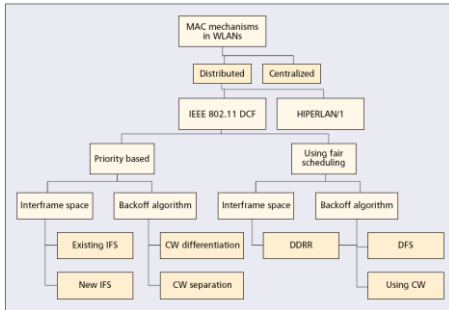

802.11 PHY

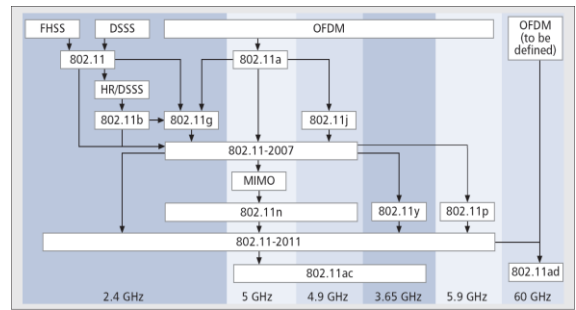

802.11 MAC

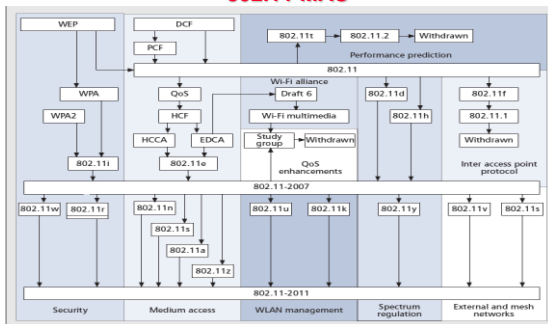

Further Issues



- ◆ QoS (Quality of Services)
 - Blackburst
 - Backoff
- ◆ Efficiency
 - Dynamic Carrier Sense
 - RTS/CTS false blocking issue
- ◆ Broadcast Protocol
- ◆ Collision Detection



High-Density (HD) WLAN



- In HD-WLAN, its overall capacity can be expressed as $L \times S \times C$
 - L – per link capacity
 - C – number of simultaneous trans. Per channel.
 - S – the number of non-interfering channels
- Hence, the issues of HD-WLAN is
 - How to increase the performance of S.
- Co-Channel Inference (CCI)


Wireless & Multimedia Network Laboratory™



Clear Channel Assessment (CCA)



- A station performs CCA before a data trans. to sense the energy in the channel.
- The station will proceed only if the sampled energy is below a threshold known as the **CCA threshold**.




Wireless & Multimedia Network Laboratory™



Receiving Sensitivity (RS)



- Today's consumer 802.11 radios are often not able to preempt a receiving process to capture a newly-arrived strong signal.
- This issue called "stronger-last" collision".

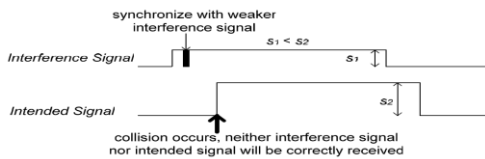

Wireless & Multimedia Network Laboratory™




Analytical Model for RS/CCA Adapt.



- In 802.11 WLAN research, the logarithm path loss model is widely used to show **average SS** at receiver.

$$P_{RX}(d) = P_{TX} \left(\bar{d} \right) \left(\frac{d}{\bar{d}} \right)^\gamma$$

$\gamma = 2$ free-space (LOS)
 $\gamma = 4$ ground reflection



Wireless & Multimedia Network Laboratory™



Only Strong signals triggers Recv.



- most of the weak signal that causes stronger-last collision will be from device in **co-channel cells**.
- Hence, let $P_r = RSSI$ be the **RS threshold**, and RSSI stands for **receive signal strength indicator**.
- However, signal strength is not constant.

$$P_r = \bar{s} - \sigma$$


Wireless & Multimedia Network Laboratory™



CCA adaptation algorithm



- The maximum of measured PER values is used with a simple linear adaptation algorithm.

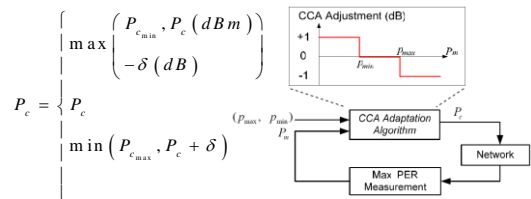


Wireless & Multimedia Network Laboratory™



Experimental Topology



- **Testbed Setup**
 - 8 APs, (cisco Aironet 1130 802.11ABG)
 - N clients with Centrino 2200 and WAG511(11a)

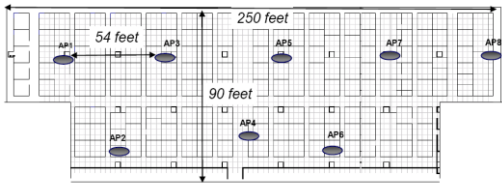


Wireless & Multimedia Network Laboratory™



Experimental – Channel Characterization



- **6 clients are deployed, one in each corner of the network.**
- HD-WLAN is config. in 802.11g in channel 1 using 11dbm as trans. power.
- CL: 3.3, 3.9, 3.3, 3.6, 3.9, 3.5.




Wireless & Multimedia Network Laboratory™



Channel Characterization




- Next, CL1-8 are deployed to measure the RSSI between AP1 and AP4.
- In each run, CL samples RSSI received from AP1 and AP4 with a 10-second interval from 4000seconds.



Wireless & Multimedia Network Laboratory™



Results of Channel Characterization

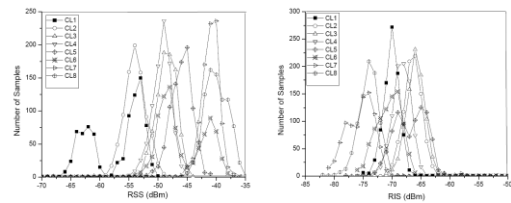

Wireless & Multimedia Network Laboratory™



RS Adaptation




- **Downlink, UDP traffic to all active CLs with packet size 1400bytes.**

$$P_m = \max(p_i)_{i=1,2,\dots,n};$$

$$Th = \frac{1}{n} \sum_i x_i;$$


$$Fi = \frac{(\sum_i x_i)^2}{n \sum_i x_i^2};$$

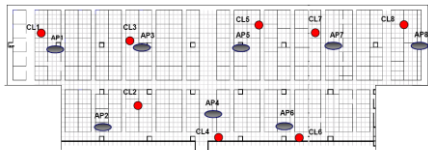

Wireless & Multimedia Network Laboratory™



RS Adaptation Results

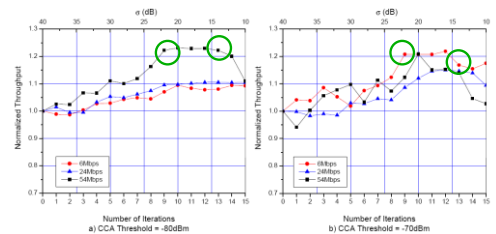

Wireless & Multimedia Network Laboratory™




CCA Adaptation




- Next, we investigate the effect of the Pm target with CCA adaptation.
- Four targets
 - $(p_{max}, p_{min}) = \{(0.2, 0.1), (0.3, 0.2), (0.4, 0.3), (0.5, 0.4)\}$ are tested in sequence
 - with total 160 iterations and
 - each one staying 40 iterations.



CCA Adaptation results

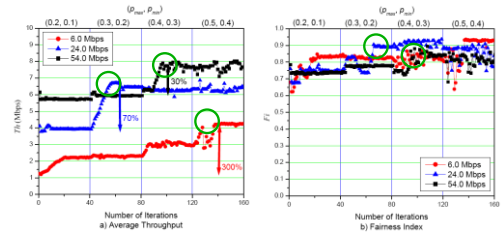


Dynamic CSMA Scheme

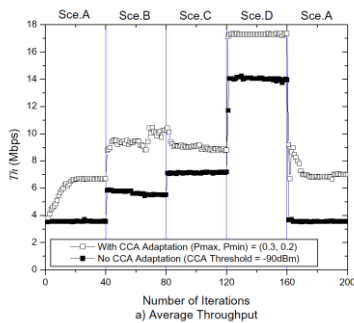

RTS-CTS-Based




- RTS-CTS-Based means RTS-CTS-DATA-ACK 4 way handshaking mechanism
- RTS (Request-to-Send)
- CTS (Clear-to-Send)
- ACK (acknowledgement)
- NAV (Network Allocation Vector)



Blocking




- Node C is blocked due to the communication between node A and node B.
- Node D does not get any response to the RTS packets it sends and enters backoff.
- Due to node C neither a hidden node nor an exposed node, so this paper call the problem is blocking problem.



False Blocking(1)



- For short, an RTS packet, destined to a blocked node, forces every other node that receives the RTS to inhibit itself even though the blocked destination does not respond, and thus, no DATA packet transmission takes place. We call this problem the false blocking problem.
- Because D and F are not really transmitting data.




False Blocking(2)




- False blocking, however, may propagate through the network, one node may become false blocked due to a node that itself is false blocked.
- False blocking may affect the network performance seriously due to unnecessary block.
- The worst case of the false blocking will decrease the throughput down to zero. This paper call the worst case "Pseudo Deadlock".



Pseudo Deadlock(1)



Into the cycle



Reliable Broadcast




MAC Reliable broadcast in ad-hoc networks, K. Tang and M. Gerla
MILCOM, Oct 2001

Broadcast Medium Window protocol


- Reliably transmit each packet to each neighbor in a round robin fashion through RTS/CTS exchange
- Neighbor list is updated on reception of any of (RTS/CTS/DATA/ACK/HELLO) frames.
- Each node maintains 3 buffers :
 - Input buffer
 - Send buffer
 - Receive buffer



Reliable Broadcast

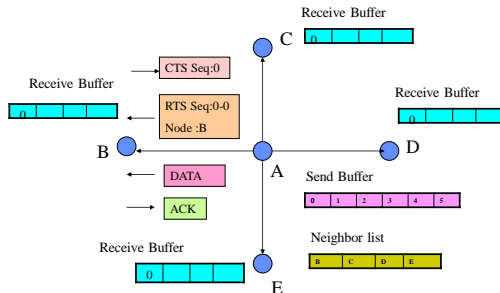


Reliable Broadcast

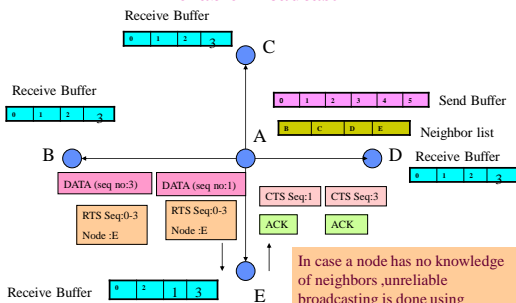

In case a node has no knowledge of neighbors, unreliable broadcasting is done using CSMA/CA until neighbors are detected.



Directional Broadcast

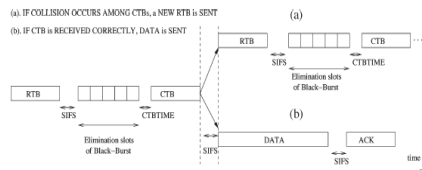

Sequence of packets. (a) Second RTB/CTS handshake. (b) DATA/ACK.



Directional Broadcast



➤ The length of black-burst for i th iteration :


$$L_i = \lfloor (d - L_{i-1}^{\text{longest}} \cdot W_{i-1}) \cdot N_{\text{max}} / W_{i-1} \rfloor \cdot \text{SlotTime}$$

$$i = 2, 3, \dots, d_{\text{max}}$$

W_i : segment width in i th iteration

L_{i-1}^{longest} : length of the longest black burst in i th iteration.

➤ Fast decrease in segment width: ➡ Few nodes ➡ Few iterations.

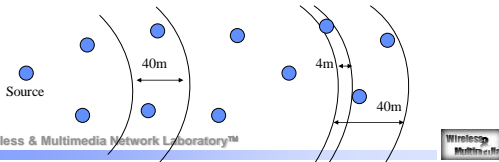

Wireless & Multimedia Network Laboratory™



Directional Broadcast



Random Collision Resolution Phase

- Failure of collision resolution phase – start random phase
- Random black burst lengths are chosen from $[0, N_{\text{max}} - 1]$ slots.
- This phase continues
 - until successful CTB or
 - until a maximum no of random iterations
- More probability of success
 - Because of short stripped segment at the start of random phase

No Black-Burst Response

- Assumes loss of RTB packet
- Retransmits RTB after a random amount of time.

Wireless & Multimedia Network Laboratory™




Directional Broadcast



Transmission of DATA and ACK

2. Successful reception
-collision resolution phase is over
-A sends broadcast packet

4. Reception of ACK
-Reliable broadcast
-No ACK after timeout
-Random backoff




Wireless & Multimedia Network Laboratory™



Intersection Broadcast



UMB Protocol



Wireless & Multimedia Network Laboratory™



Intersection Broadcast



Fully Ad-Hoc intersection Handling


(AMB protocol)

- Define an intersection region of radius R with intersection as the centre.
- Selects a Hunter vehicle inside the intersection region.
- Select a vehicle for branching the Packet Dissemination
 - Hunter vehicle sends I-RTB (Intersection-RTB)
 - Vehicle closest to the intersection sends the longest black-burst

Wireless & Multimedia Network Laboratory™



Intersection Broadcast



Wireless & Multimedia Network Laboratory™



Node Contention

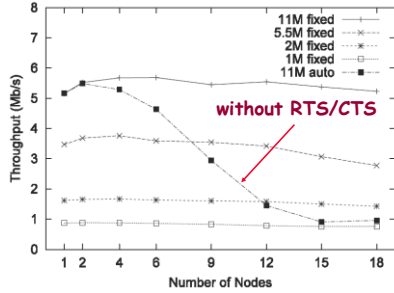


Fig. 7 Throughputs with node contentions.
[Choi, ACM SIGMETRICS'05]

Collision Aware Rate Adaptation (CARA)

- Employs two methods for identifying collisions:
 - RTS Probing
 - Clear Channel Assessment (CCA)
- Focuses on when to **decrease** the transmission rate.
 - Set M_{th} , the consecutive increase threshold, to the same value as ARF: $M_{th} = 10$.

CARA RTS Probing

- Assumes all RTS transmission failures are due to collisions.
- Transmission failure after RTS/CTS must be due to channel errors.
- RTS probing that enables an RTS/CTS exchange ONLY when a data frame transmission fails.

RTS Probing State Diagram




Fig. 3. State transition diagram of RTS Probing

RTS Probing

TABLE I
LIST OF NOTATIONS USED IN THE RTS PROBING PROCEDURE

Notations	Comments
m	consecutive success count
n	consecutive failure count
M_{th}	consecutive success threshold
N_{th}	consecutive failure threshold
$TxPend$	status: a data frame is pending
R_{dt}	array of transmission rates 802.11a = {6, 12, 18, 24, 36, 48, 54 Mbps} * 802.11b = {1, 2, 5.5, 11 Mbps}
r_{dt}	transmission rate: an element of R_{dt}
++	increase transmission rate to the next higher one
--	decrease transmission rate to the next lower one
P_{th}	probe activation threshold
$RFSThr$	frame size-based RTS Threshold as defined in the standard

* The 9 Mbps rate is excluded as it is shown useless in [19].

RTS Probing

CARA default: $[P_{th} = 1, N_{th} = 2]$

- Data frame transmitted without RTS/CTS.
- If the transmission fails, RTS/CTS exchange is activated for the next retransmission. If this retransmission fails, then the rate is lowered.
- If retransmission is successful, stay at same rate and send next frame without RTS/CTS.

ARF vs RTS Probing

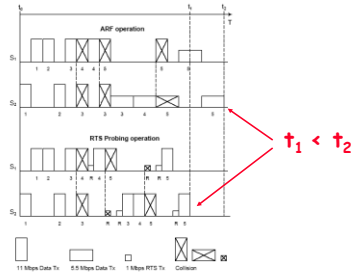


Fig. 4. Illustration of ARF and RTS-Probing timelines for a reservation network, when channel status is good enough to accommodate the highest transmission rate of the IEEE 802.11b PHY, i.e., 11 Mbps

Wireless & Multimedia



CCA Detection

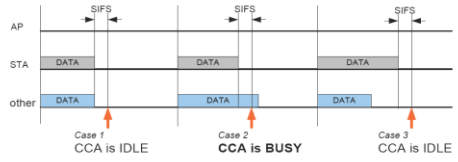


Fig. 5. Three possible cases of collision. In the second case, the collision can be detected via CCA detection.

This assumes no hidden terminals!

*In this case [Case 2], retransmit without increasing the failure count and *without lowering the transmission rate*.

Wireless & Multimedia **CCA does not help for Case 1 or Case 3.**



CARA-1 (with RTS Probing)




Fig. 7. Throughput comparison of our proposed rate adaptation scheme (CARA-1) against RTS/CTS and ARF for star-topology networks with various number of contending stations

Wireless & Multimedia Network Laboratory™

