

無線網路多媒體系統 Wireless Multimedia System

Lecture 5: Cellular Concepts
中央大學 吳曉光博士
<http://wmlab.csie.ncu.edu.tw/course/wms>



Mobility Support & Channel Reuse



Mobility Support~ Handover



Channel Allocations: Reuse

Channel Assignment in Cellular System

- ◆ Fundamental Problem:
- ◆ Fixed Channel Assignment
- ◆ Dynamic Channel Assignment
- ◆ Hybrid Schemes
- ◆ Whole Channel Usage (CDMA)
- ◆ Reduce the Cell Size

Hand-off in Cellular Networks

- ◆ Transfer of mobile to a new channel when it crosses cell boundary
- ◆ Handoff delay
- ◆ Prioritizing handoffs to reduce probability of dropped calls
- ◆ Handoff Strategies
- ◆ Network Controlled handoff (NCHO)
- ◆ Mobile assisted handoff (MAHO)
- ◆ Mobile controlled handoff (MCHO)

Agenda

- ◆ Cellular Concepts
- ◆ Channel Assignments
- ◆ Handover
- ◆ Next Lecture: 3G WCDMA design



Reading


- ◆ [Katzela96]Katzela, and M. Nahgshineh, "Channel assignment schemes for cellular mobile telecommunication systems: a comprehensive survey," IEEE Personal Communications, June 1996
- ◆ [Pollini96], G.P. Pollini, "Trends in handover design," IEEE Communications Magazine, March 1996.




Channel Allocation



- ♦ A given Channel Spectrum (or bandwidth) can be divided into a set of disjoint or non-interfering radio channel
 - Frequency Division
 - ♦ frequency band
 - Time Division
 - ♦ time slot
 - Code Division
 - ♦ modulation code




Cellular System Concept

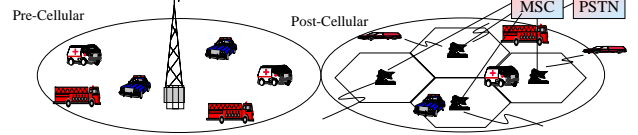

- ♦ Replace single high power transmitter covering the entire service area with low power
 - Mobiles in sufficiently distant base-stations may be assigned identical channel (frequency, time slot, & code)
 - System capacity may be increased without adding more spectrum
- ♦ Major conceptual breakthrough in spectra congestion & user capacity
 - Required relatively minor technological changes frequency reuse & co-channel interference, channel allocation, hand-offs




Cell Shape

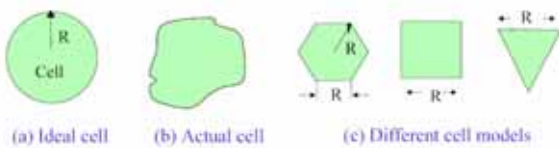

Frequency Reuse



Reuse Distance

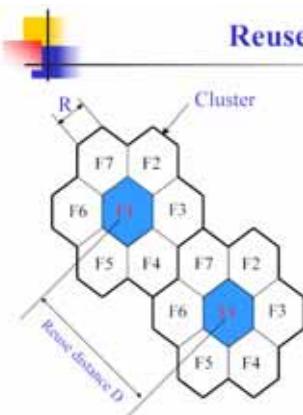

- For hexagonal cells, the reuse distance is given by

$$D = \sqrt{3NR}$$

where R is cell radius and N is the reuse pattern (the cluster size or the number of cells per cluster).

- Reuse factor is

$$\frac{D}{R} = \sqrt{3N}$$




Reuse Distance (Cont'd)



- The cluster size or the number of cells per cluster is given by

$$N = i^2 + ij + j^2$$

where i and j are integers.



- $N = 1, 3, 4, 7, 9, 12, 13, 16, 19, 21, 28, \dots$, etc.

The popular value of N being 4 and 7.



Cochannel Interference

Wireless & Multimedia Network Laboratory™

Worst Case of Cochannel Interference

Wireless & Multimedia Network Laboratory™

Cochannel Interference

- Cochannel interference ratio is given by

$$\frac{C}{I} = \frac{\text{Carrier}}{\text{Interference}} = \frac{C}{\sum_{i=1}^M I_i}$$
 where I is co-channel interference and M is the maximum number of co-channel interfering cells.
 For $M = 6$, C/I is given by

$$\frac{C}{I} = \frac{C}{\sum_{i=1}^6 \left(\frac{D_i}{R}\right)^\gamma}$$
 where γ is the propagation path loss slope and $\gamma = 2-5$.

Wireless & Multimedia Network Laboratory™

Channel Reuse

- The same channel is reused simultaneously by other sets (Co-channel)

$$CIR = \frac{\text{signal}}{\text{interference}} = \frac{P_i d_i^{-\alpha}}{\sum P_i d_i^{-\alpha} + N_0}$$

Wireless & Multimedia Network Laboratory™

Interference

$$CIR = \frac{\text{signal}}{\text{interference}} = \frac{P_i d_i^{-\alpha}}{\sum P_i d_i^{-\alpha} + N_0}$$

Wireless & Multimedia Network Laboratory™

How to improve CIR (Quality)

- Increase the transmitting power (Power Control)
- Increase the separating distance (Channel Reuse)


$$CIR = \frac{\text{signal}}{\text{interference}} = \frac{P_i d_i^{-\alpha}}{\sum P_i d_i^{-\alpha} + N_0}$$

Wireless & Multimedia Network Laboratory™


Approaches



- ♦ Fixed no flexibility
- ♦ Dynamic complexity
- ♦ Hybrid might be ok



Frequency Reuse



Idealized grid of Hexagonal cells

- ♦ Each BS is allocated a subset of carrier freqs
- ♦ Nearby BSs are allocated a different subset to avoid interference
- ♦ The total set is allocated to a small tessellating group of N neighboring BSs
 - Called "reuse cluster"
 - 1/N is the "reuse factor"
 - System capacity goes up by $\frac{Area_{reuse}}{N \times Area_{cell}}$
- ♦ Used in FDMA & TDMA based systems
 - Not required in CDMA which has universal frequency reuse
- ♦ Cells idealized as hexagons
 - Real cell footprints are amorphous
 - Hexagon close to a circle
 - Not appropriate for micro-cells, highways etc.



Reuse Cluster For Hexagonal Cells



- ♦ A tessellating group of N hexagonal cells is possible only iff



- ♦ Frequency Reuse Distance D
 - minimum distance between centers of co-channel cells
 - ♦ Depends on # of nearby cochannel cells, terrain, antenna height, transmit power etc.
 - for hexagonal cells, $D = R\sqrt{3N}$
 - ♦ Where, R is the radius of hexagon (center to vertices)
 - Increasing N, and therefore D, reduce co-channel interference (assuming R and transmit power are invariant)
 - D/R is called the co-channel reuse ratio



Determining Cluster Size



- ♦ If N is reduced while cell area is kept constant
 - more cluster needed to cover the service area
 - more channels per cell
 - more system capacity achieved
 - more co-channel interference co-channel cells are closer
- ♦ Goal is to maximize system capacity (or, capacity per unit area) subject to interference limitations
 - Minimum N such that carrier-to-interference ratio
 - ♦ $C/I \geq (C/I)_{min}$
 - Reverse co-channel interference
 - ♦ Interference at a BS from co-channel MHs in other BSs
 - Forward co-channel interference
 - ♦ Interference at a MH from other co-channel BSs
 - Adjacent channel interference
 - ♦ From signals in adjacent channel due to imperfect filters
 - ♦ Don't assign adjacent frequencies to the same cell and if possible immediate neighbors



Determining Cluster Size N



- ♦ Goal is maximize system capacity (or, capacity per unit area) subject to interference limitations
 - minimum N such that carrier-to-interference ratio
 - ♦ $C/I \geq (C/I)_{min}$
 - reverse co-channel interference
 - ♦ interference at BS from co-channel MHs in other BSs
 - forward co-channel interference
 - ♦ interference at a MH from other co-channel BSs
 - adjacent channel interference
 - ♦ from signals in adjacent channels due to imperfect filters





Calculating C/I



- ♦ Let i_0 be the number of co-interfering cells, and noise be negligible
 - $C/I = \text{Carrier} / \text{All of the co-channel interference}$
 - Where C is the desired carrier power and I_i is the signal power of i-th interferer

$$\frac{C}{I} = \frac{C}{\sum_{i=1}^{i_0} I_i}$$



Calculating C/I



- Recall: $P_r(d) = P_t(d_0) \left(\frac{d}{d_0}\right)^{-\alpha}$
- For equal transmit powers and path loss exponents: $\frac{C}{I} = \frac{D_0^\alpha}{\sum_{i=1}^N D_i^\alpha}$
- Assume:
 - $n=4$
 - worst case is at $D_0 = R$ (when MH is at the fringe of its cell)
 - only the six "first-tier" co-channel cells are considered
 - $D_1 = D_2 = D_3 = D_4 = D_5 = D_6 = D$
- $C/I = (D/R)^\alpha / 6$ depends only on the ratio D/R

system	$(C/I)_{\min}$	D/R	N
AMPS	18 dB	4.6	7
GSM	11 dB	3.0	4



Microcells-Reducing Cell Area




- IF cell area is reduced while N is kept constant
 - more clusters needed to cover the service area
 - C/I is unchanged because D/R is unchanged
 - system capacity grows quadratically with radius scale factor
- Small cells need lower RF transmitted power
 - longer battery, smaller mobile end-points
- Small cells result in higher cell-boundary crossing
 - more signalling overhead
 - performance degradation (more disruption)



Channel Assignment in Cellular System



- Fundamental Problem
 - How to assign channels to requesting call at a BS ?
- Goal: Maximum Spectral Efficiency for a specified grade of service and a given degree of computational complexity
 - probability of new call blocking
 - probability of forced termination
 - link quality
- Maybe a "new" connection, or a connection undergoing "handoff"

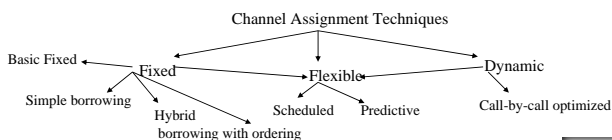

Channel Assignment Techniques



- Fixed
 - Basic Fixed
 - Simple borrowing
 - Hybrid borrowing with ordering
- Flexible
 - scheduled
 - predictive
- Dynamic
 - call-by-call optimized



Fixed Channel Assignment



- Basic strategy
 - each cell is statically allocated a subset of channels
 - a requesting call in the cell can only use channel allocated to that cell
 - if no available channel in that cell, the call is blocked
 - MSC only informs new BS about hand-off, & keep track of serving channel



Fixed Channel Assignment




- Variation
 - borrow channel from neighboring BSs if all channels busy at BS under MSC supervision, and only if does not cause interference borrowed channels are "locked"
 - hybrid channel assignment
 - two groups of channels: fixed and borrowable
 - ratio determined a priori depending on traffic estimate
 - borrow-with-channel-ordering
 - fixed-to-borrowable channel ration varied on changing traffic condition
 - channels are rank ordered



Fixed Channel Assignment



- ◆ We might borrow from neighboring cells

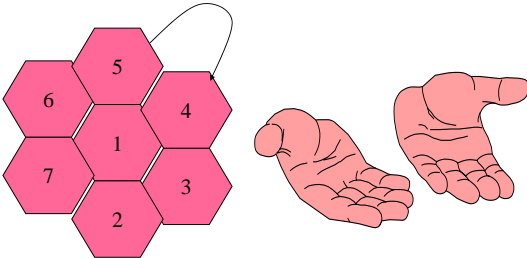


Wireless & Multimedia Network Laboratory™



Traffic & Resource



- ◆ Uniform Distribution

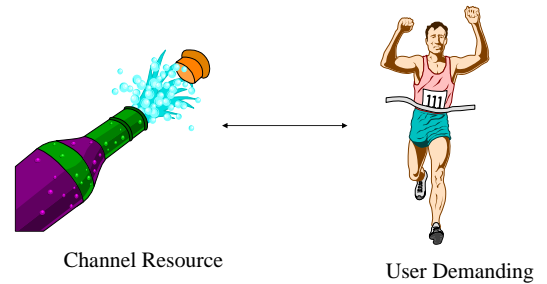


Wireless & Multimedia Network Laboratory™



Dynamic & Assignment



- ◆ Maybe I should assign you based on current condition



Wireless & Multimedia Network Laboratory™



Issues to consider



- ◆ Selected Cost
- ◆ Blocking Probability
- ◆ Reuse Distance
- ◆ CIR
- ◆ QoS (Quality of Service)
 - current value
 - handoff value

Wireless & Multimedia Network Laboratory™



Dynamic Channel Assignment (DCA)



- ◆ Basic Features
 - channels not allocated to cells permanently
 - MSC allocated channel to a call from the global pool taking into account
 - Advantage: channel assignment may be retained across hand-off
 - Disadvantage: interruptions, deadlocks, instability

Wireless & Multimedia Network Laboratory™



Dynamic Channel Assignment



- ◆ DCA algorithms differ in distribution of control among BSs and MSC
 - Centralized DCA
 - ◆ can do a globally optimized channel assignment and call rearrangement BSs need to communicate with MSC e.g. Maximum Packing
 - Decentralized & Fully Decentralized DCA
 - ◆ rely only on local monitoring to make channel assignments
 - ◆ require limited local communication among cluster of BSs

Wireless & Multimedia Network Laboratory™



Flexible Channel Assignment



- ◆ Combine aspects of FCA and DCA
- ◆ Each cell is assigned a fixed set of channel
- ◆ Plus, a pool of channels is reserved for flexible assignment
 - MSC assigns these channels
- ◆ Flexible assignment strategies
 - Scheduled assignment: rely on known foreseeable changes in traffic pattern
 - Predictive assignment: based on measured traffic load at every BS



MSC will pick up one for MH




- ◆ Here you go !



Flexible Channel Assignment



- ◆ Assign some of channel for minimum traffic requirement
- ◆ Keep all of the others in a service pool

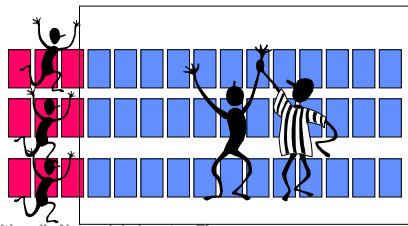

Handoff Handling




Keep the QoS while the user moves



Handling Handoffs




- ◆ Handoff
 - change the radio channel
 - ◆ the same base station
 - ◆ the new base station
 - due to
 - ◆ the radio link degradation
 - ◆ channel reorder



What is going to happen ?



- ◆ The new cell must assign new channel
- ◆ We must reserve some hand off channel
- ◆ Some connection must be blocked !!



Solutions for handoff



- ◆ Handoff Priority
 - guard channel for handoff
 - how much, inefficiency
- ◆ Queuing of Handoff request
 - take a seat for future handoff




Guard Channel



Reserved for Handoff




Thresholds

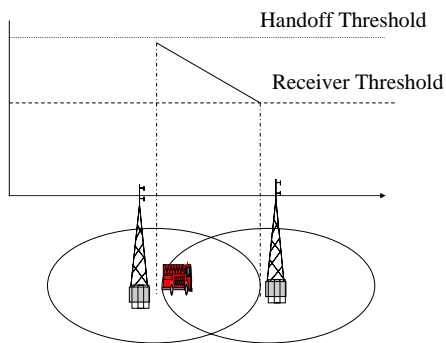

Who is going to take over Handoff



- ◆ Yourself (Mobile Users)
- ◆ Infrastructure Network
 - Base Station
 - Mobile Switching Center

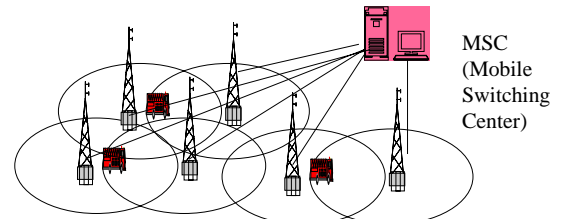


MSC
(Mobile
Switching
Center)



Negotiating Procedure



- ◆ Base Station
 - detect the receiving signal from MH
 - send a measurement order
- ◆ Mobile Host
 - measure on demand
 - measure all the time

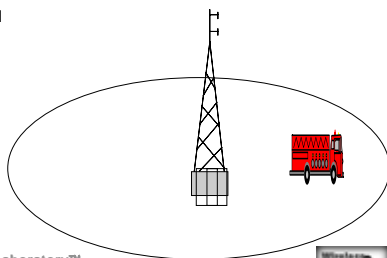

Hand off Procedure




- ◆ Decide the New Base Station
 - MSC picks the best for MH
 - MSC picks the candidate MH specify
- ◆ New Base Station decides to accept or not ?



Call Queueing Scheme



- ◆ Queue for a channel, handoff threshold, receiver threshold

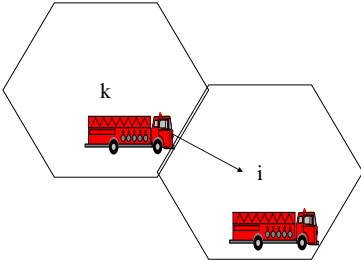

Wireless & Multimedia Network Laboratory™



Trends in Hand over Design



- ◆ Hand over and Hand off are the same
- ◆ Small cells -> more hand over
 - allocate network resource to reroute the call to the new base station
 - if not quick enough, QoS will drop dramatically



QoS



Hand off




Wireless & Multimedia Network Laboratory™



Mobility Solution



- ◆ Multi-tiers
 - micro-cell and macro-cell
 - based on the speed
 - different schemes

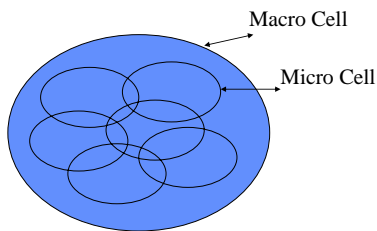

Wireless & Multimedia Network Laboratory™



Velocity Estimation



- ◆ Doppler Frequency is known -> Estimation of the velocity of the mobile users
- ◆ Mobility is estimated from the time spent in a cell



Wireless & Multimedia Network Laboratory™



Handoff in Cellular Networks



- ◆ Transfer of mobile to a new channel when it crosses cell boundary
 - identify new base station, assign new channel
 - hand-off initiated at a carefully chosen signal level
 - avoid triggering handoff due to momentary fades

Wireless & Multimedia Network Laboratory™



Hand-off



- ◆ Handoff delay & interruption
 - dropped (or on hold) connection if signal too low before handoff processed
 - performance degradation (disruption) in data stream
- ◆ Prioritizing handoffs to reduce probability of dropped call
 - connection dropped if no spare channels in new cell
 - guard channel : subset of channels reserved for handoff requests works well with DCA
 - handoff queuing : time interval between handoff trigger & connection drop cell overlap, speed of mobile

Wireless & Multimedia Network Laboratory™



Handoff in Cellular Networks



- ◆ Probability of unnecessary Handoffs
- ◆ Hard vs. Soft handoff
- ◆ Hand off rate
- ◆ Handoff also triggers rerouting in the network layer
- ◆ Handoff is tightly coupled to DCA, MAC, and Networking Routing



Handoff Strategies (I)



- ◆ Network controlled handoff (NCHO)
 - used in first generation analog cellular systems
 - link quality is only monitored by the serving BS and surrounding BS
 - handoff decision is made by the network (typically central agent)
 - handoff delays of several seconds (10) and infrequent link quality updates



Handoff Strategies (II)



- ◆ Mobile assisted handoff
 - used in second generation digital cellular system
 - both the mobile and the serving BS measure link quality
 - only mobile measures link quality of alternate BSs
 - mobile periodically sends the link quality measurements to serving BS
 - handoff decision is made by the network
 - handoff delays of few seconds (1-2) and frequent link quality updates




Handoff Strategies (III)



- ◆ Mobile controlled handoff
 - used in some new digital cellular systems
 - link quality measurements as in MAHO
 - serving BS relays link quality measurements to mobile
 - handoff decision is made by the mobile
 - handoff delays of about 100 ms



Handoff Scenario

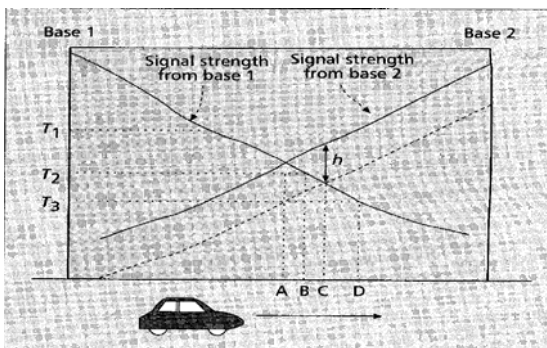

Handoff Initiation Strategies




- ◆ Relative signal strength
 - Always choose the strongest received BS
 - Too many unnecessary hand-offs
- ◆ Relative signal strength with threshold
 - Current signal < threshold, and other BS is stronger
 - May let MH stray too far into other cell; overlapping cell coverage
 - Effectiveness depends on knowledge of cross-over signal
- ◆ Relative signal strength with hysteresis (plus optionally dwell timer)
 - Hand-off only if new BS's signal is stronger by a hysteresis margin
 - Prevents ping-pong effect from rapid fluctuations
- ◆ Relative signal strength with hysteresis & Threshold
 - Hand-off only if current BS's signal below a threshold, and new BS's signal is stronger by the hysteresis margin
- ◆ Prediction techniques
 - Decide based on expected future value of received signal strength



Handoff Queueing

CS'E

- ♦ Goal is to reduce handoff failure probability
 - Better to block a new call than to drop an existing one
 - Exploits overlap between cells to queue hand-off request in advance

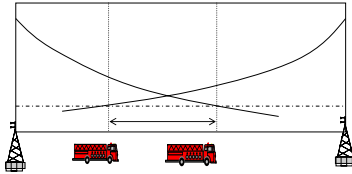


- ♦ Handoff request is issued according to handoff initiation strategy
 - Request is queued
 - Decision must be made (handoff or failure) while MH still in handoff interval

Wireless & Multimedia Network Laboratory™



Cell Splitting

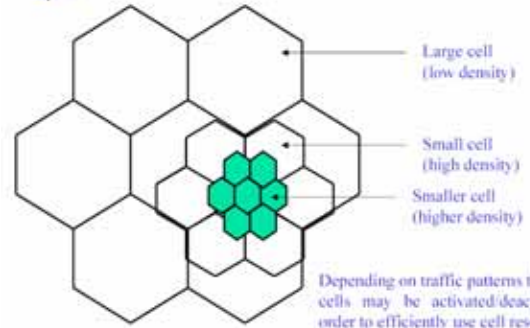


Wireless & Multimedia Network Laboratory™



Cell Sectoring by Antenna Design

CS'E

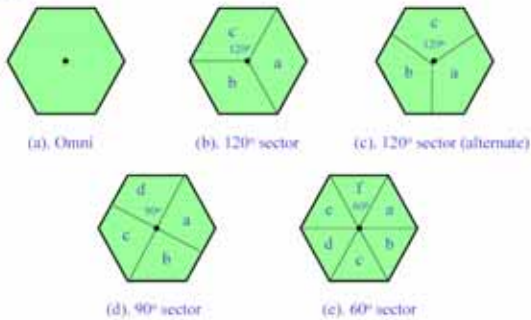


Wireless & Multimedia Network Laboratory™



Cell Sectoring by Antenna Design

CS'E

- Placing directional transmitters at corners where three adjacent cells meet




Wireless & Multimedia Network Laboratory™



Worst Case for Forward Channel Interference in Three-sectors

CS'E

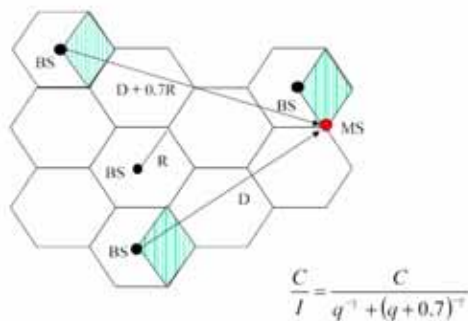


Wireless & Multimedia Network Laboratory™



Worst Case for Forward Channel Interference in Six-sectors

CS'E

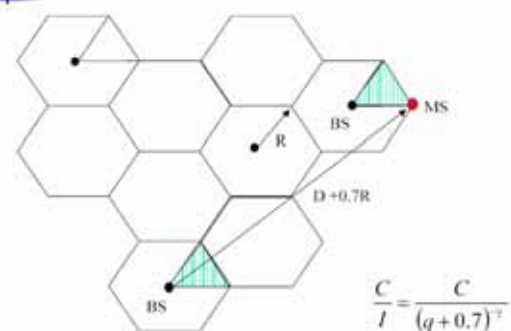

Wireless & Multimedia Network Laboratory™



Handoff Parameters

CS/E



Mobility Support~ Handover



Channel Allocations: Reuse



Wireless & Multimedia Network Laboratory™



Performance Index

CS/E


- ◆ Traffic Request: (QoS)
 - New Call Probability
 - Handoff Call Probability
 - Traffic Requirements (Bandwidth, delay)
 - Call Holding Time
 - Dwell Time (Channel Occupation) for a handoff call or new call
 - Delay/Distance/Un-necessary handoff
- ◆ Mobility:
 - Resident time in a cell
 - Hand off rate
- ◆ Channel Resource:
 - Channel assignment
 - Blocking Rate (New Call blocking rate, Handoff blocking rate)

Wireless & Multimedia Network Laboratory™



IP-based 3G Wireless Network

CS/E

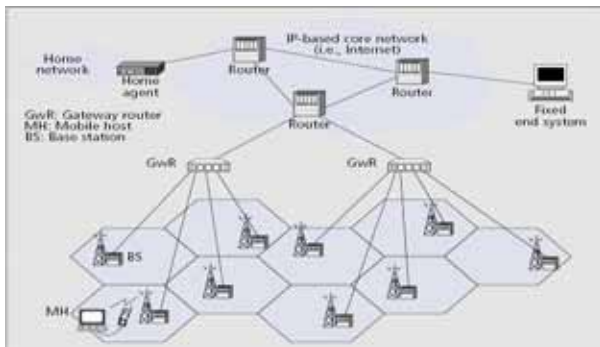


Wireless & Multimedia Network Laboratory™



Multi-path Effect (Time)

CS/E

- ◆ RMS > Symbol Duration:
 - ISI (handled by Equalizer)
- ◆ RMS < Symbol Duration:
 - More than one paths signal arrive (might have different phases)




Wireless & Multimedia Network Laboratory™



Coherence Bandwidth (Bandwidth)

CS/E

- ◆ Coherence Bandwidth < BW of signal:
 - Frequency Selective Fading
- ◆ Coherence Bandwidth > BW of signal:
 - Flat Fading

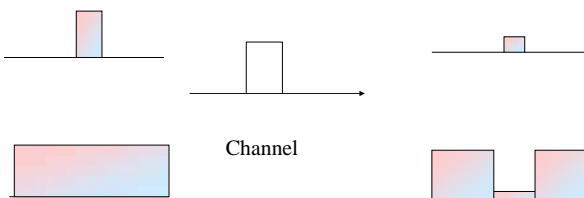


Wireless & Multimedia Network Laboratory™



BS and BS list in MS

CS/E

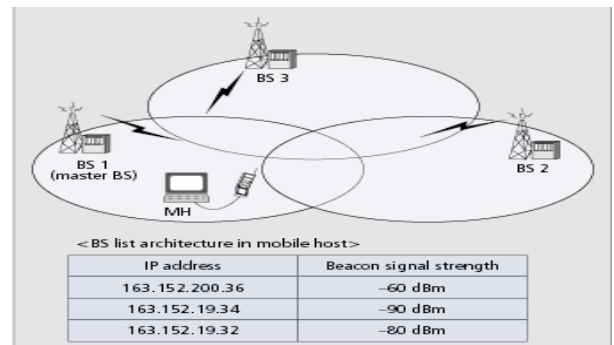

Wireless & Multimedia Network Laboratory™

