

## 無線網路多媒體系統 Wireless Multimedia System

### Lecture 5: Cellular Concepts

中央大學 吳曉光博士

<http://wmlab.csie.ncu.edu.tw/course/wms>

Wireless & Multimedia Network Laboratory™


無線網路多媒體實驗室

Wireless Multimedia

## Mobility Support & Channel Reuse



Mobility Support~ Handover

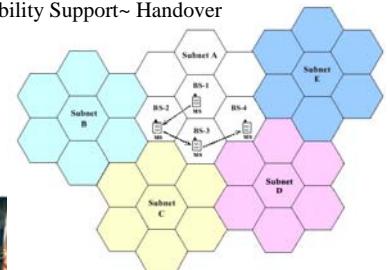

Channel Allocations: Reuse

Wireless & Multimedia Network Laboratory™

Wireless Multimedia



Wireless & Multimedia Network Laboratory™

Wireless Multimedia


## ChungLi Case Study



Wireless & Multimedia Network Laboratory™

Wireless Multimedia


## Moving Behavior

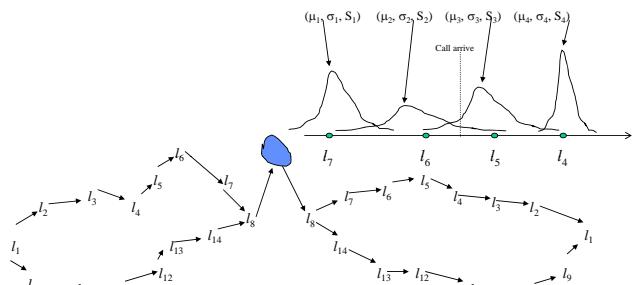

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## Mobile Broadband Infrastructure Diagram

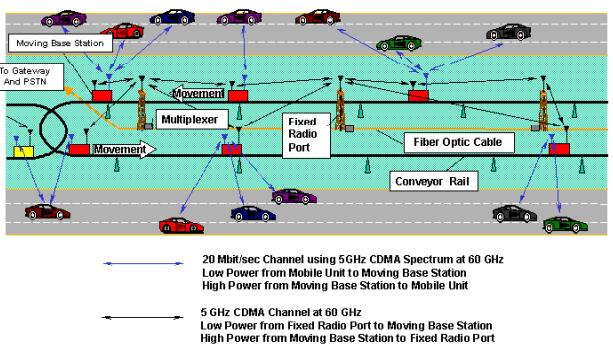

## Channel Assignment in Cellular System

- ♦ Fundamental Problem:
- ♦ Fixed Channel Assignment
- ♦ Dynamic Channel Assignment
- ♦ Hybrid Schemes
- ♦ Whole Channel Usage (CDMA)
- ♦ Reduce the Cell Size

Wireless & Multimedia Network Laboratory™

CSIE

## Hand-off in Cellular Networks

- ♦ Transfer of mobile to a new channel when it crosses cell boundary
- ♦ Handoff delay
- ♦ Prioritizing handoffs to reduce probability of dropped calls
- ♦ Handoff Strategies
- ♦ Network Controlled handoff (NCHO)
- ♦ Mobile assisted handoff (MAHO)
- ♦ Mobile controlled handoff (MCHO)

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Agenda

- ♦ Cellular Concepts
- ♦ Channel Assignments
- ♦ Handover
- ♦ Next Lecture: 3G WCDMA design



Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Reading


- ♦ [Katzela96] Katzela, and M. Nahgshineh, "Channel assignment schemes for cellular mobile telecommunication systems: a comprehensive survey," IEEE Personal Communications, June 1996
- ♦ [Pollinin96], G.P. Pollini, "Trends in handover design," IEEE Communications Magazine, March 1996.



Wireless & Multimedia

## Channel Allocation


- ♦ A given Channel Spectrum (or bandwidth) can be divided into a set of disjoint or non-interfering radio channel
  - Frequency Division
    - ♦ frequency band
  - Time Division
    - ♦ time slot
  - Code Division
    - ♦ modulation code



Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Cellular System Concept

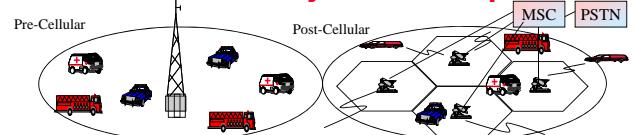


- ♦ Replace single high power transmitter covering the entire service area with low power
  - Mobiles in sufficiently distant base-stations may be assigned identical channel (frequency, time slot, & code)
  - System capacity may be increased without adding more spectrum
- ♦ Major conceptual breakthrough in spectra congestion & user capacity
  - Required relatively minor technological changes frequency reuse & co-channel interference, channel allocation, hand-offs

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Cell Shape

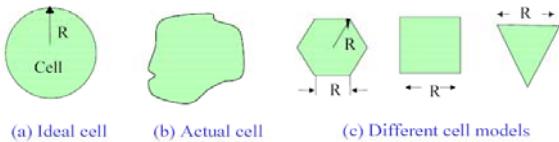


Wireless & Multimedia Network Laboratory™

Wireless Multimedia

CSIE

## Frequency Reuse

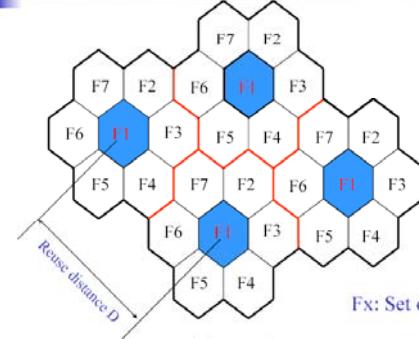


Fx: Set of frequency

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

CSIE

## Reuse Distance



- For hexagonal cells, the reuse distance is given by

$$D = \sqrt{3N}R$$

where  $R$  is cell radius and  $N$  is the reuse pattern (the cluster size or the number of cells per cluster).

- Reuse factor is

$$\frac{D}{R} = \sqrt{3N}$$

Wireless & Multimedia Network Laboratory™

Wireless Multimedia


CSIE

## Reuse Distance (Cont'd)

- The cluster size or the number of cells per cluster is given by

$$N = i^2 + ij + j^2$$

where  $i$  and  $j$  are integers.



$$N = 1, 3, 4, 7, 9, 12, 13, 16, 19, 21, 28, \dots, \text{etc.}$$


The popular value of  $N$  being 4 and 7.

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

CSIE

## Cochannel Interference

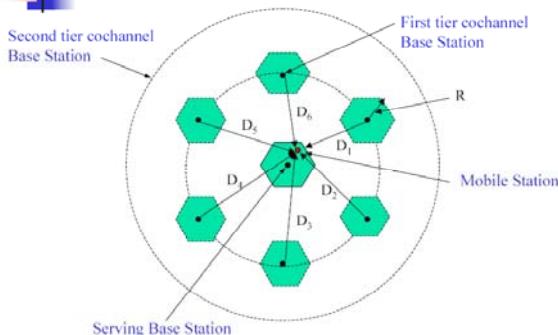


Wireless & Multimedia Network Laboratory™

Wireless Multimedia

CSIE

## Worst Case of Cochannel Interference

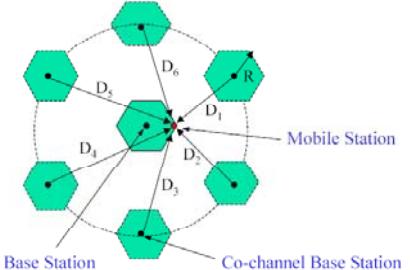

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

CSIE

## Cochannel Interference

- Cochannel interference ratio is given by

$$\frac{C}{I} = \frac{\text{Carrier}}{\text{Interference}} = \frac{C}{\sum_{k=1}^M I_k}$$


where  $I$  is co-channel interference and  $M$  is the maximum number of co-channel interfering cells.

For  $M = 6$ , C/I is given by


$$\frac{C}{I} = \frac{C}{\sum_{k=1}^6 \left( \frac{D_k}{R} \right)^\gamma} \quad \text{where } \gamma \text{ is the propagation path loss slope and } \gamma = 2-5.$$

## Channel Reuse

- The same channel is reused simultaneously by other sets (Co-channel)

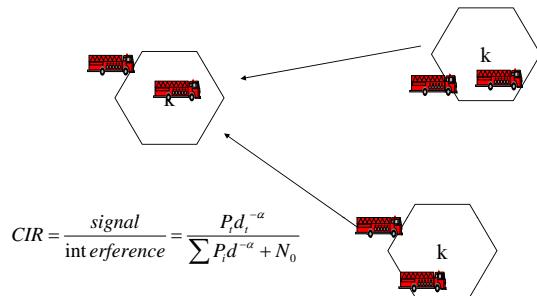

## Interference

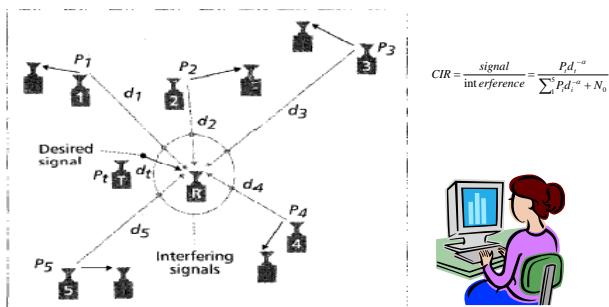


## How to improve CIR (Quality)

- Increase the transmitting power (Power Control)
- Increase the separating distance (Channel Reuse)

$$CIR = \frac{\text{signal}}{\text{interference}} = \frac{P_t d_t^{-\alpha}}{\sum P_i d_i^{-\alpha} N_0}$$

## Approaches

- Fixed no flexibility
- Dynamic complexity
- Hybrid might be ok



Idealized grid of Hexagonal cells

## Frequency Reuse

- Each BS is allocated a subset of carrier freqs
- Nearby BSs are allocated a different subset to avoid interference
- The total set is allocated to a small tessellating group of  $N$  neighboring BSs
  - Called "reuse cluster"
  - $1/N$  is the "reuse factor"
  - System capacity goes up by  $\frac{\text{Area}_{\text{service}}}{N \times \text{Area}_{\text{cell}}}$
- Used in FDMA & TDMA based systems
  - Not required in CDMA which has universal frequency reuse
- Cells idealized as hexagons
  - Real cell footprints are amorphous
  - Hexagon close to a circle
  - Not appropriate for micro-cells, highways etc.

## Reuse Cluster For Hexagonal Cells

- A tessellating group of N hexagonal cells is possibly only iff



- Frequency Reuse Distance D

- minimum distance between centers of co-channel cells
  - Depends on # of nearby cochannel cells, terrain, antenna height, transmit power etc.
- for hexagonal cells,  $D = R \sqrt{3} N$ 
  - Where, R is the radius of hexagon (center to vertices)
- Increasing N, and therefore D, reduce co-channel interference (assuming R and transmit power are invariant)
- D/R is called the co-channel reuse ratio

Wireless & Multimedia Network Laboratory™

CSIE

## Determining Cluster Size

- If N is reduced while cell area is kept constant
  - more cluster needed to cover the service area
  - more channels per cell
  - more system capacity achieved
  - more co-channel interference co-channel cells are closer
- Goal is to maximize system capacity (or, capacity per unit area) subject to interference limitations
  - Minimum N such that carrier-to-interference ratio
    - $C/I \geq (C/I)_{min}$
  - Reverse co-channel interference
    - Interference at a BS from co-channel MHS in other BSs
  - Forward co-channel interference
    - Interference at a MH from other co-channel BSs
  - Adjacent channel interference
    - From signals in adjacent channel due to imperfect filters
    - Don't assign adjacent frequencies to the same cell and if possible immediate neighbors

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Determining Cluster Size N



- Goal is maximize system capacity (or, capacity per unit area) subject to interference limitations
  - minimum N such that carrier-to-interference ratio
    - $C/I \geq (C/I)_{min}$
  - reverse co-channel interference
    - interference at BS from co-channel MHS in other BSs
  - forward co-channel interference
    - interference at a MH from other co-channel BSs
  - adjacent channel interference
    - from signals in adjacent channels due to imperfect filters

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Calculating C/I

- Let  $i_0$  be the number of co-interfering cells, and noise be negligible
- $C/I = \text{Carrier Power} / \text{All of the co-channel interference}$
- Where C is the desired carrier power and  $I_i$  is the signal of i-th interferer



Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Calculating C/I

- Recall:  $P_r(d) = P_r(d_0) \left(\frac{d}{d_0}\right)^n$
- For equal transmit powers and path loss exponents:  $\frac{C}{I} = \frac{P_r^2}{\sum_{i=1}^n P_r^2}$
- Assume:
  - 1. n=4
  - 2. worst case is at  $D_0 = R$  (when MH is at the fringe of its cell)
  - 3. only the six "first-tier" co-channel cells are considered
  - 4.  $D_1 = D_2 = D_3 = D_4 = D_5 = D_6 = D$
- $C/I \sim (D/R)^4 / 6$  depends only on the ratio D/R

system	$(C/I)_{min}$	D/R	N
AMPS	18 dB	4.6	7
GSM	11 dB	3.0	4

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Microcells-Reducing Cell Area


- If cell area is reduced while N is kept constant
  - more clusters needed to cover the service area
  - C/I is unchanged because D/R is unchanged
  - system capacity grows quadratically with radius scale factor
- Small cells need lower RF transmitted power
  - longer battery, smaller mobile end-points
- Small cells result in higher cell-boundary crossing
  - more signalling overhead
  - performance degradation (more disruption)

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Channel Assignment in Cellular System

- ♦ Fundamental Problem
  - How to assign channels to requesting call at a BS ?
- ♦ Goal: Maximum Spectral Efficiency for a specified grade of service and a given degree of computational complexity
  - probability of new call blocking
  - probability of forced termination
  - link quality
- ♦ Maybe a "new" connection, or a connection undergoing "handoff"

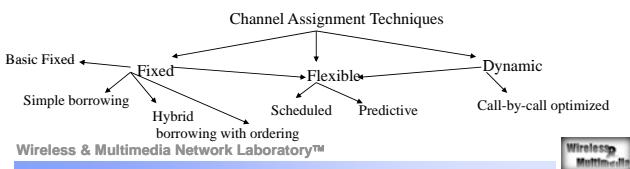

## Channel Assignment Techniques

- ♦ Fixed
  - Basic Fixed
  - Simple borrowing
  - Hybrid borrowing with ordering
- ♦ Flexible
  - scheduled
  - predictive
- ♦ Dynamic
  - call-by-call optimized

## Fixed Channel Assignment


- ♦ Basic strategy
  - each cell is statically allocated a subset of channels
  - a requesting call in the cell can only use channel allocated to that cell
  - if no available channel in that cell, the call is blocked
  - MSC only informs new BS about hand-off, & keep track of serving channel

## Fixed Channel Assignment

- ♦ Variation
  - borrow channel from neighboring BSs if all channels busy at BS under MSC supervision, and only if does not cause interference borrowed channels are "locked"
  - hybrid channel assignment
    - two groups of channels: fixed and borrowable
    - ratio determined a priori depending on traffic estimate
  - borrow-with-channel-ordering
    - fixed-to-borrowable channel ration varied on changing traffic condition
    - channels are rank ordered


## Fixed Channel Assignment

- ♦ We might borrow from neighboring cells

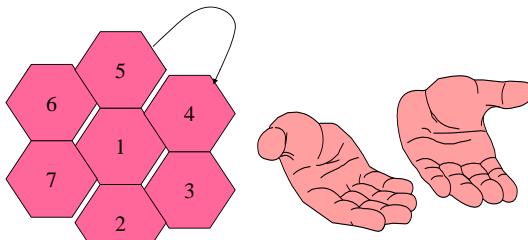

## Traffic & Resource

- ♦ Uniform Distribution

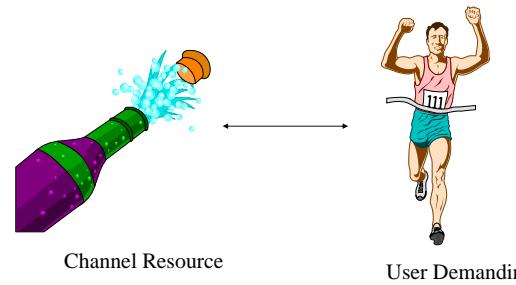


Wireless & Multimedia Network Laboratory™



## Dynamic & Assignment

- ♦ Maybe I should assign you based on current condition



Wireless & Multimedia Network Laboratory™

CSIE

## Issues to consider



- ♦ Selected Cost
- ♦ Blocking Probability
- ♦ Reuse Distance
- ♦ CIR
- ♦ QoS (Quality of Service)
  - current value
  - handoff value

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Dynamic Channel Assignment (DCA)

- ♦ Basic Features
  - channels not allocated to cells permanently
  - MSC allocated channel to a call from the global pool taking into account
  - Advantage: channel assignment may be retained across hand-off
  - Disadvantage: interruptions, deadlocks, instability

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

CSIE

## Dynamic Channel Assignment

- ♦ DCA algorithms differ in distribution of control among BSs and MSC
  - Centralized DCA
    - ♦ can do a globally optimized channel assignment and call rearrangement BSs need to communicate with MSC e.g. Maximum Packing
  - Decentralized & Fully Decentralized DCA
    - ♦ rely only on local monitoring to make channel assignments
    - ♦ require limited local communication among cluster of BSs

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Flexible Channel Assignment

- ♦ Combine aspects of FCA and DCA
- ♦ Each cell is assigned a fixed set of channel
- ♦ Plus, a pool of channels is reserved for flexible assignment
  - MSC assigns these channels
- ♦ Flexible assignment strategies
  - Scheduled assignment: rely on known foreseeable changes in traffic pattern
  - Predictive assignment: based on measured traffic load at every BS

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

CSIE

## MSC will pick up one for MH

- ♦ Here you go !




Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Flexible Channel Assignment

- Assign some of channel for minimum traffic requirement
- Keep all of the others in a service pool

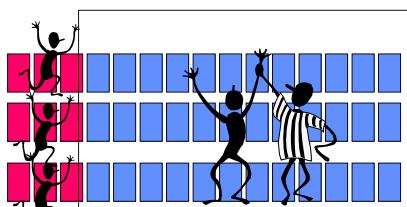

Wireless & Multimedia Network Laboratory™

CSE

CSE

## Handoff Handling




Keep the QoS while the user moves

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Handling Handoffs

- Handoff
  - change the radio channel
    - the same base station
    - the new base station
  - due to
    - the radio link degradation
    - channel reorder




Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

CSE

## What is going to happen ?

- The new cell must assign new channel
- We must reserve some hand off channel
- Some connection must be blocked !!



Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Solutions for handoff

- Handoff Priority
  - guard channel for handoff
  - how much, inefficiency
- Queueing of Handoff request
  - take a seat for future handoff

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

CSE

## Guard Channel




Reserved for Handoff

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Thresholds

CSIE

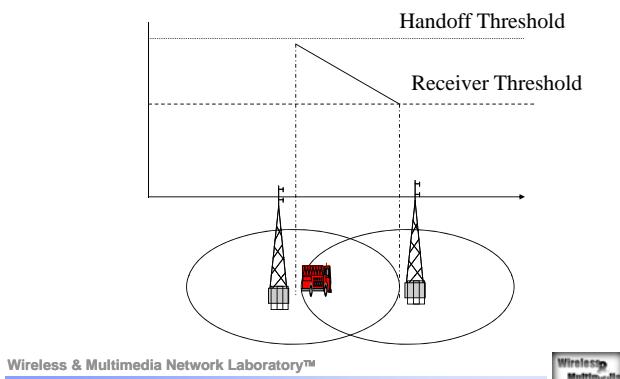


Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## Who is going to take over Handoff

CSIE

- ◆ Yourself (Mobile Users)
- ◆ Infrastructure Network
  - Base Station
  - Mobile Switching Center

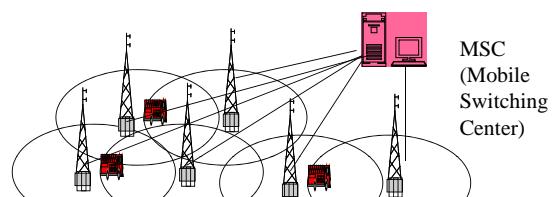


Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## Negotiating Procedure

CSIE

- ◆ Base Station
  - detect the receiving signal from MH
  - send a measurement order
- ◆ Mobile Host
  - measure on demand
  - measure all the time

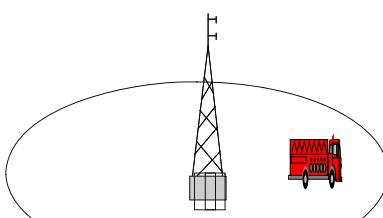

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## Hand off Procedure

CSIE

- ◆ Decide the New Base Station
  - MSC picks the best for MH
  - MSC picks the candidate MH specify
- ◆ New Base Station decides to accept or not ?


Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## Call Queueing Scheme

CSIE

- ◆ Queue for a channel, handoff threshold, receiver threshold

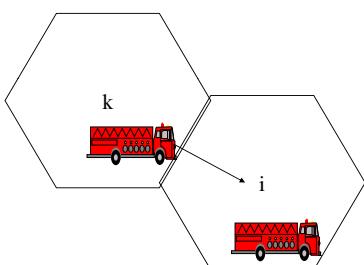

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## Trends in Hand over Design

CSIE

- ◆ Hand over and Hand off are the same
- ◆ Small cells -> more hand over
  - allocate network resource to reroute the call to the new base station
  - if not quick enough, QoS will drop dramatically

QoS      ←→      Hand off


Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## Mobility Solution

CSE

- Multi-tiers
  - micro-cell and macro-cell
  - based on the speed
  - different schemes

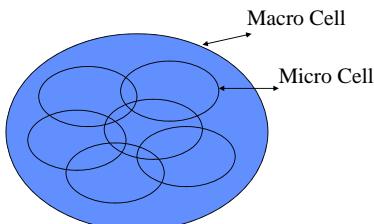

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## Velocity Estimation

CSE

- Doppler Frequency is known -> Estimation of the velocity of the mobile users
- Mobility is estimated from the time spent in a cell



Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## Handoff in Cellular Networks

CSE

- Transfer of mobile to a new channel when it crosses cell boundary
  - identify new base station, assign new channel
  - hand-off initiated at a carefully chosen signal level
  - avoid triggering handoff due to momentary fades

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## Hand-off

CSE

- Handoff delay & interruption
  - dropped (or on hold) connection if signal too low before handoff processed
  - performance degradation (disruption) in data stream
- Prioritizing handoffs to reduce probability of dropped call
  - connection dropped if no spare channels in new cell
  - guard channel : subset of channels reserved for handoff requests works well with DCA
- handoff queuing : time interval between handoff trigger & connection drop cell overlap, speed of mobile

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## Handoff in Cellular Networks

CSE

- Probability of unnecessary Handoffs
- Hard vs. Soft handoff
- Hand off rate
- Handoff also triggers rerouting in the network layer
- Handoff is tightly coupled to DCA, MAC, and Networking Routing

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## Handoff Strategies (I)

CSE

- Network controlled handoff (NCHO)
  - used in first generation analog cellular systems
  - link quality is only monitored by the serving BS and surrounding BS
  - handoff decision is made by the network (typically central agent)
  - handoff delays of several seconds (10) and infrequent link quality updates



Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## Handoff Strategies (II)

- Mobile assisted handoff
  - used in second generation digital cellular system
  - both the mobile and the serving BS measure link quality
  - only mobile measures link quality of alternate BSs
  - mobile periodically sends the link quality measurements to serving BS
  - handoff decision is made by the network
  - handoff delays of few seconds (1-2) and frequent link quality updates




## Handoff Strategies (III)

- Mobile controlled hand off
  - used in some new digital cellular systems
  - link quality measurements as in MAHO
  - serving BS relays link quality measurements to mobile
  - handoff decision is made by the mobile
  - handoff delays of about 100 ms



## Handoff Scenario

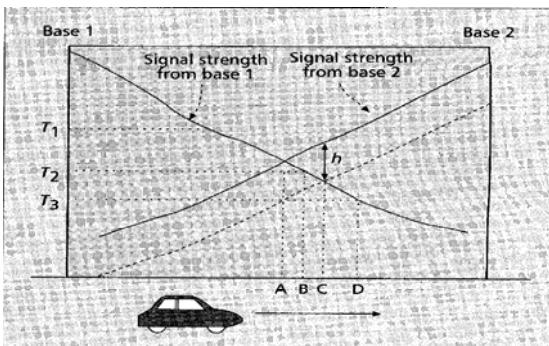


## Handoff Initiation Strategies

- Relative signal strength
  - Always choose the strongest received BS
  - Too many unnecessary hand-offs
- Relative signal strength with threshold
  - Current signal < threshold, and other BS is stronger
  - May let MH stray too far into other cell; overlapping cell coverage
  - Effectiveness depends on knowledge of cross-over signal
- Relative signal strength with hysteresis (plus optionally dwell timer)
  - Hand-off only if new BS's signal is stronger by a hysteresis margin
  - Prevents ping-pong effect from rapid fluctuations
- Relative signal strength with hysteresis & Threshold
  - Hand-off only if current BS's signal below a threshold, and new BS's signal is stronger by the hysteresis margin
- Prediction techniques
  - Decide based on expected future value of received signal strength


## Handoff Queueing

- Goal is to reduce handoff failure probability
  - Better to block a new call than to drop an existing one
  - Exploits overlap between cells to queue hand-off request in advance

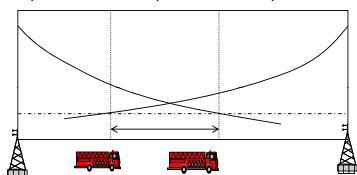


- Handoff request is issued according to handoff initiation strategy
  - Request is queued
  - Decision must be made (handoff or failure) while MH still in handoff interval

## Cell Splitting



Depending on traffic patterns the smaller cells may be activated/deactivated in order to efficiently use cell resources.

## Cell Sectors by Antenna Design

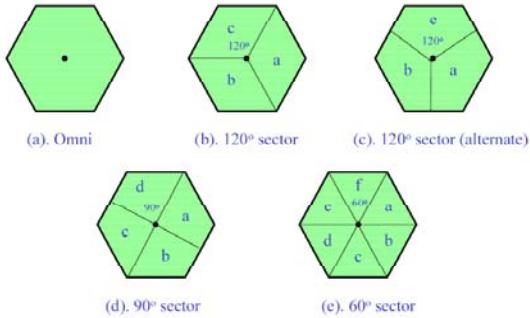


Wireless & Multimedia Network Laboratory™

CSIE

## Cell Sectors by Antenna Design


- Placing directional transmitters at corners where three adjacent cells meet



Wireless & Multimedia Network Laboratory™

Wireless & Multimedia


## Worst Case for Forward Channel Interference in Three-sectors

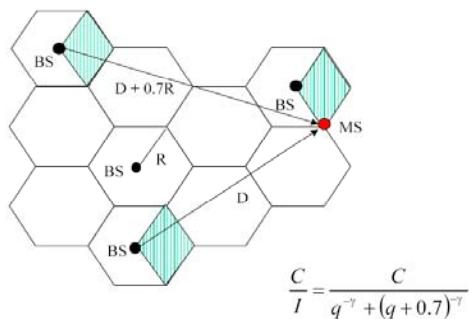

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Worst Case for Forward Channel Interference in Six-sectors

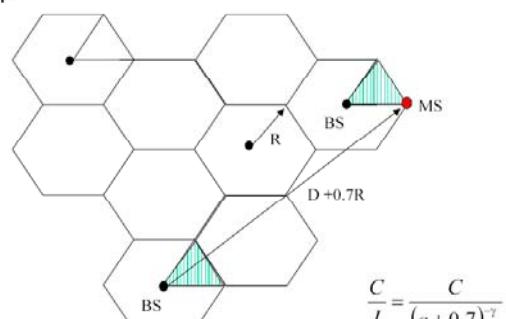


Wireless & Multimedia Network Laboratory™

Wireless & Multimedia

## Handoff Parameters



Mobility Support~ Handover

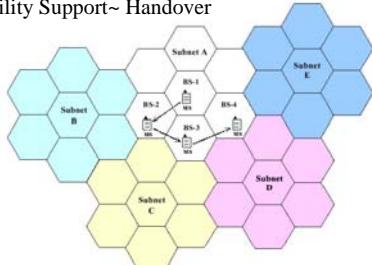

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia


## Performance Index

- Traffic Request: (QoS)
  - New Call Probability
  - Handoff Call Probability
  - Traffic Requirements (Bandwidth, delay)
  - Call Holding Time
  - Dwell Time (Channel Occupation) for a handoff call or new call
  - Delay/Distance/Un-necessary handoff
- Mobility:
  - Resident time in a cell
  - Hand off rate
- Channel Resource:
  - Channel assignment
  - Blocking Rate (New Call blocking rate, Handoff blocking rate)

Wireless & Multimedia Network Laboratory™


Wireless & Multimedia

## IP-based 3G Wireless Network

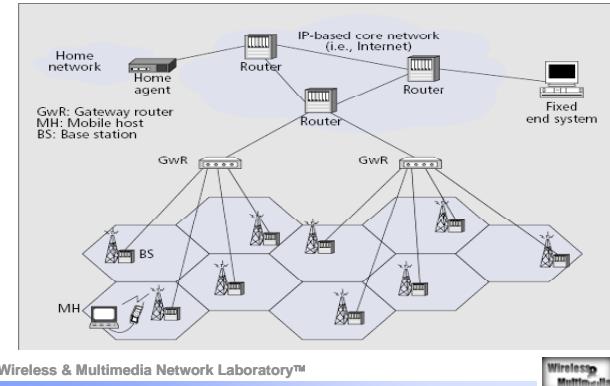


## Multi-path Effect (Time)

- RMS > Symbol Duration:
  - ISI (handled by Equalizer)
- RMS < Symbol Duration:
  - More than one paths signal arrive (might have different phases)



## Coherence Bandwidth (Bandwidth)

- Coherence Bandwidth < BW of signal:
  - Frequency Selective Fading
- Coherence Bandwidth > BW of signal:
  - Flat Fading

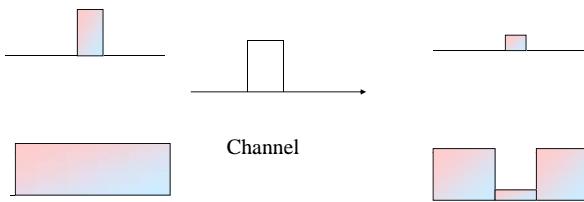

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## BS and BS list in MS

