

CS/E

無線網路多媒體系統 Wireless Multimedia System

Lecture 5: Cellular Concepts 中央大學 吳曉光博士

無線網路多媒體實驗室
Wireless Network & Multimedia Laboratory

Wireless & Multimedia Network Laboratory™

CS/E

Mobility Support & Channel Reuse

Mobility Support~ Handover

Channel Allocations: Reuse

Wireless & Multimedia Network Laboratory™

CS/E

中央大學生活資訊網

WAP 個人化設定
個人行事曆
WEB BBS
回首頁

無線網路多媒體實驗室
Wireless Network & Multimedia Laboratory

Wireless & Multimedia Network Laboratory™

CS/E

ChungLi Case Study

Wireless & Multimedia Network Laboratory™

CS/E

Moving Behavior

Time

Wireless & Multimedia Network Laboratory™

CS/E

Mobile Broadband Infrastructure Diagram

Movement

- 20 Mbit/sec Channel using 5GHz CDMA Spectrum at 60 GHz
Low Power from Mobile Unit to Moving Base Station
High Power from Moving Base Station to Mobile Unit
- 5 GHz CDMA Channel at 60 GHz
Low Power from Fixed Radio Port to Moving Base Station
High Power from Moving Base Station to Fixed Radio Port

Wireless & Multimedia Network Laboratory™

Channel Assignment in Cellular System

- ◆ Fundamental Problem:
- ◆ Fixed Channel Assignment
- ◆ Dynamic Channel Assignment
- ◆ Hybrid Schemes
- ◆ Whole Channel Usage (CDMA)
- ◆ Reduce the Cell Size

Wireless & Multimedia Network Laboratory™



Hand-off in Cellular Networks

- ◆ Transfer of mobile to a new channel when it crosses cell boundary
- ◆ Handoff delay
- ◆ Prioritizing handoffs to reduce probability of dropped calls
- ◆ Handoff Strategies
- ◆ Network Controlled handoff (NCHO)
- ◆ Mobile assisted handoff (MAHO)
- ◆ Mobile controlled handoff (MCHO)

Wireless & Multimedia Network Laboratory™



Agenda

- ◆ Cellular Concepts
- ◆ Channel Assignments
- ◆ Handover
- ◆ Next Lecture: 3G WCDMA design



Wireless & Multimedia Network Laboratory™



Reading

- ◆ [Katzela96]Katzela, and M. Nahgshineh, "Channel assignment schemes for cellular mobile telecommunication systems: a comprehensive survey," IEEE Personal Communications, June 1996
- ◆ [Pollini96], G.P. Pollini, "Trends in handover design," IEEE Communications Magazine, March 1996.




Wireless & Multimedia Network Laboratory™



Channel Allocation


- ◆ A given Channel Spectrum (or bandwidth) can be divided into a set of disjoint or non-interfering radio channel
 - Frequency Division
 - ◆ frequency band
 - Time Division
 - ◆ time slot
 - Code Division
 - ◆ modulation code



Wireless & Multimedia Network Laboratory™



Cellular System Concept

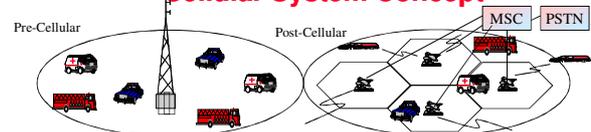

- ◆ Replace single high power transmitter covering the entire service area with low power
 - Mobiles in sufficiently distant base-stations may be assigned identical channel (frequency, time slot, & code)
 - System capacity may be increased without adding more spectrum
- ◆ Major conceptual breakthrough in spectra congestion & user capacity
 - Required relatively minor technological changes frequency reuse & co-channel interference, channel allocation, hand-offs

Wireless & Multimedia Network Laboratory™




Cell Shape



(a) Ideal cell




(b) Actual cell



(c) Different cell models

Wireless & Multimedia Network Laboratory™

Frequency Reuse

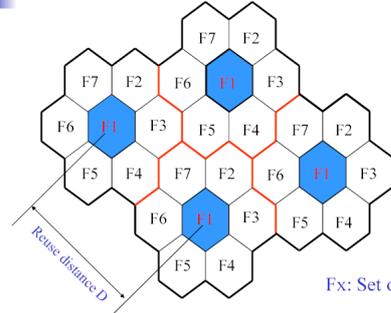


Fx: Set of frequency

7 cell reuse cluster

Wireless & Multimedia Network Laboratory™

Reuse Distance



- For hexagonal cells, the reuse distance is given by


$$D = \sqrt{3NR}$$
 where R is cell radius and N is the reuse pattern (the cluster size or the number of cells per cluster).
- Reuse factor is

$$\frac{D}{R} = \sqrt{3N}$$

Wireless & Multimedia Network Laboratory™


Reuse Distance (Cont'd)

- The cluster size or the number of cells per cluster is given by

$$N = i^2 + ij + j^2$$
 where i and j are integers.
 
- $N = 1, 3, 4, 7, 9, 12, 13, 16, 19, 21, 28, \dots$, etc.
The popular value of N being 4 and 7.


Wireless & Multimedia Network Laboratory™

Cochannel Interference

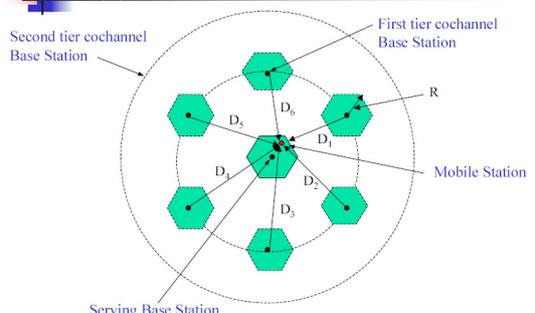

Wireless & Multimedia Network Laboratory™

Worst Case of Cochannel Interference

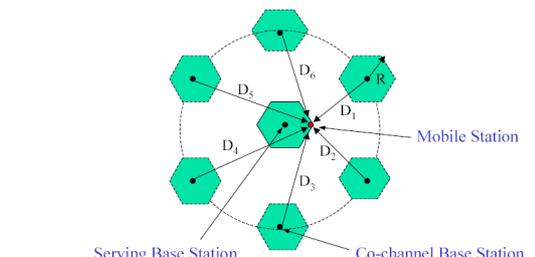

Wireless & Multimedia Network Laboratory™

Cochannel Interference

CS/E

- Cochannel interference ratio is given by

$$\frac{C}{I} = \frac{\text{Carrier}}{\text{Interference}} = \frac{C}{\sum_{k=1}^M I_k}$$

where I is co-channel interference and M is the maximum number of co-channel interfering cells.

For $M = 6$, C/I is given by

$$\frac{C}{I} = \frac{C}{\sum_{k=1}^6 \left(\frac{D_k}{R}\right)^\gamma}$$

where γ is the propagation path loss slope and $\gamma = 2-5$.

Wireless & Multimedia Network Laboratory™

Channel Reuse

CS/E

- The same channel is reused simultaneously by other sets (Co-channel)

$$CIR = \frac{\text{signal}}{\text{int erference}} = \frac{P_s d_s^{-\alpha}}{\sum P_i d_i^{-\alpha} + N_0}$$

Wireless & Multimedia Network Laboratory™

Interference

CS/E

$$CIR = \frac{\text{signal}}{\text{int erference}} = \frac{P_s d_s^{-\alpha}}{\sum P_i d_i^{-\alpha} + N_0}$$

Wireless & Multimedia Network Laboratory™

How to improve CIR (Quality)

CS/E

- Increase the transmitting power (Power Control)
- Increase the separating distance (Channel Reuse)

$$CIR = \frac{\text{signal}}{\text{int erference}} = \frac{P_s d_s^{-\alpha}}{\sum P_i d_i^{-\alpha} + N_0}$$

Wireless & Multimedia Network Laboratory™

Approaches

CS/E

- Fixed no flexibility
- Dynamic complexity
- Hybrid might be ok

Wireless & Multimedia Network Laboratory™

Frequency Reuse

CS/E

- Each BS is allocated a subset of carrier freqs
- Nearby BSs are allocated a different subset to avoid interference
- The total set is allocated to a small tessellating group of N neighboring BSs
 - Called "reuse cluster"
 - $1/N$ is the "reuse factor"
 - System capacity goes up by $\frac{\text{Area}_{\text{reuse}}}{N \times \text{Area}_{\text{cell}}}$
- Used in FDMA & TDMA based systems
 - Not required in CDMA which has universal frequency reuse
- Cells idealized as hexagons
 - Real cell footprints are amorphous
 - Hexagon close to a circle
 - Not appropriate for micro-cells, highways etc.

Wireless & Multimedia Network Laboratory™

Reuse Cluster For Hexagonal Cells

- A tessellating group of N hexagonal cells is possibly only iff



Frequency Reuse Distance D

- minimum distance between centers of co-channel cells
 - Depends on # of nearby cochannel cells, terrain, antenna height, transmit power etc.
- for hexagonal cells, $D = R\sqrt{3N}$
 - Where, R is the radius of hexagon (center to vertices)
- Increasing N, and therefore D, reduce co-channel interference (assuming R and transmit power are invariant)
- D/R is called the co-channel reuse ratio

Wireless & Multimedia Network Laboratory™



Determining Cluster Size

- If N is reduced while cell area is kept constant
 - more cluster needed to cover the service area
 - more channels per cell
 - more system capacity achieved
 - more co-channel interference co-channel cells are closer
- Goal is to maximize system capacity (or, capacity per unit area) subject to interference limitations
 - Minimum N such that carrier-to-interference ratio
 - $C/I \geq (C/I)_{\min}$
 - Reverse co-channel interference
 - Interference at a BS from co-channel MHS in other BSs
 - Forward co-channel interference
 - Interference at a MH from other co-channel BSs
 - Adjacent channel interference
 - From signals in adjacent channel due to imperfect filters
 - Don't assign adjacent frequencies to the same cell and if possible immediate neighbors

Wireless & Multimedia Network Laboratory™



Determining Cluster Size N

- Goal is maximize system capacity (or, capacity per unit area) subject to interference limitations
 - minimum N such that carrier-to-interference ratio
 - $C/I \geq (C/I)_{\min}$
 - reverse co-channel interference
 - interference at BS from co-channel MHS in other BSs
 - forward co-channel interference
 - interference at a MH from other co-channel BSs
 - adjacent channel interference
 - from signals in adjacent channels due to imperfect filters



Wireless & Multimedia Network Laboratory™



Calculating C/I

- Let i_j be the number of co-interfering cells, and noise be negligible
 - $C/I = \text{Carrier} / \text{All of the co-channel interference}$
 - Where C is the desired carrier power and I_i is the signal power of i-th interferer

$$\frac{C}{I} = \frac{C}{\sum_{i=1}^n I_i}$$



Wireless & Multimedia Network Laboratory™



Calculating C/I

- Recall: $P_r(d) = P_t(d_0) \left(\frac{d}{d_0}\right)^{-n}$
- For equal transmit powers and path loss exponents: $\frac{C}{I} = \frac{D^n}{\sum_{j=1}^n D_j^n}$
- Assume:
 - $n=4$
 - worst case is at $D_0 = R$ (when MH is at the fringe of its cell)
 - only the six "first-tier" co-channel cells are considered
 - $D_1 = D_2 = D_3 = D_4 = D_5 = D_6 = D$
- $C/I = (D/R)^4 / 6$ depends only on the ratio D/R

system	$(C/I)_{\min}$	D/R	N
AMPS	18 dB	4.6	7
GSM	11 dB	3.0	4

Wireless & Multimedia Network Laboratory™



Microcells-Reducing Cell Area


- If cell area is reduced while N is kept constant
 - more clusters needed to cover the service area
 - C/I is unchanged because D/R is unchanged
 - system capacity grows quadratically with radius scale factor
- Small cells need lower RF transmitted power
 - longer battery, smaller mobile end-points
- Small cells result in higher cell-boundary crossing
 - more signalling overhead
 - performance degradation (more disruption)

Wireless & Multimedia Network Laboratory™



Channel Assignment in Cellular System

- ◆ Fundamental Problem
 - How to assign channels to requesting call at a BS ?
- ◆ Goal: Maximum Spectral Efficiency for a specified grade of service and a given degree of computational complexity
 - probability of new call blocking
 - probability of forced termination
 - link quality
- ◆ Maybe a "new" connection, or a connection undergoing "handoff"

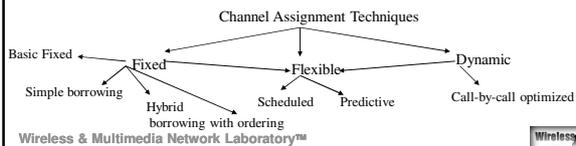

Channel Assignment Techniques

- ◆ Fixed
 - Basic Fixed
 - Simple borrowing
 - Hybrid borrowing with ordering
- ◆ Flexible
 - scheduled
 - predictive
- ◆ Dynamic
 - call-by-call optimized

Wireless & Multimedia Network Laboratory™

Fixed Channel Assignment

- ◆ Basic strategy
 - each cell is statically allocated a subset of channels
 - a requesting call in the cell can only use channel allocated to that cell
 - if no available channel in that cell, the call is blocked
 - MSC only informs new BS about hand-off, & keep track of serving channel

Wireless & Multimedia Network Laboratory™


Fixed Channel Assignment

- ◆ Variation
 - borrow channel from neighboring BSs if all channels busy at BS under MSC supervision, and only if does not cause interference borrowed channels are "locked"
 - hybrid channel assignment
 - ◆ two groups of channels: fixed and borrowable
 - ◆ ratio determined a priori depending on traffic estimate
 - borrow-with-channel-ordering
 - ◆ fixed-to-borrowable channel ration varied on changing traffic condition
 - ◆ channels are rank ordered

Wireless & Multimedia Network Laboratory™


Fixed Channel Assignment

- ◆ We might borrow from neighboring cells

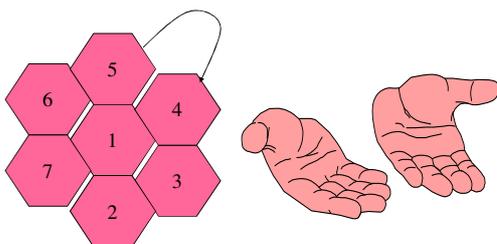

Traffic & Resource

- ◆ Uniform Distribution

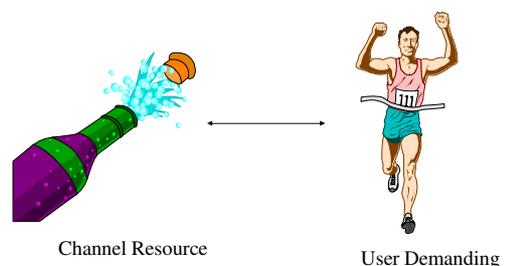

Dynamic & Assignment

CS/E

- ◆ Maybe I should assign you based on current condition



Wireless & Multimedia Network Laboratory™



Issues to consider

CS/E

- ◆ Selected Cost
- ◆ Blocking Probability
- ◆ Reuse Distance
- ◆ CIR
- ◆ QoS (Quality of Service)
 - current value
 - handoff value



Wireless & Multimedia Network Laboratory™



Dynamic Channel Assignment (DCA)

CS/E

- ◆ Basic Features
 - channels not allocated to cells permanently
 - MSC allocated channel to a call from the global pool taking into account
 - Advantage: channel assignment may be retained across hand-off
 - Disadvantage: interruptions, deadlocks, instability

Wireless & Multimedia Network Laboratory™



Dynamic Channel Assignment

CS/E

- ◆ DCA algorithms differ in distribution of control among BSs and MSC
 - Centralized DCA
 - can do a globally optimized channel assignment and call rearrangement BSs need to communicate with MSC e.g. Maximum Packing
 - Decentralized & Fully Decentralized DCA
 - rely only on local monitoring to make channel assignments
 - require limited local communication among cluster of BSs

Wireless & Multimedia Network Laboratory™



Flexible Channel Assignment

CS/E

- ◆ Combine aspects of FCA and DCA
- ◆ Each cell is assigned a fixed set of channel
- ◆ Plus, a pool of channels is reserved for flexible assignment
 - MSC assigns these channels
- ◆ Flexible assignment strategies
 - Scheduled assignment: rely on known foreseeable changes in traffic pattern
 - Predictive assignment: based on measured traffic load at every BS

Wireless & Multimedia Network Laboratory™



MSC will pick up one for MH

CS/E

- ◆ Here you go !




Wireless & Multimedia Network Laboratory™



Flexible Channel Assignment

- ◆ Assign some of channel for minimum traffic requirement
- ◆ Keep all of the others in a service pool

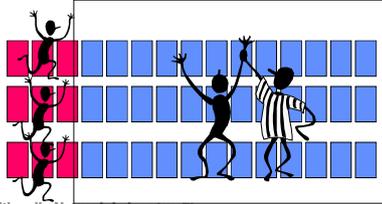

Wireless & Multimedia Network Laboratory™

Wireless
Multimedia

Handoff Handling




Keep the QoS while the user moves

Wireless & Multimedia Network Laboratory™

Wireless
Multimedia

Handling Handoffs

- ◆ Handoff
 - change the radio channel
 - ◆ the same base station
 - ◆ the new base station
 - due to
 - ◆ the radio link degradation
 - ◆ channel reorder




Wireless & Multimedia Network Laboratory™

Wireless
Multimedia

What is going to happen ?

- ◆ The new cell must assign new channel
- ◆ We must reserve some hand off channel
- ◆ Some connection must be blocked !!



Wireless & Multimedia Network Laboratory™

Wireless
Multimedia

Solutions for handoff

- ◆ Handoff Priority
 - guard channel for handoff
 - how much, inefficiency
- ◆ Queueing of Handoff request
 - take a seat for future handoff

Wireless & Multimedia Network Laboratory™

Wireless
Multimedia

Guard Channel



Reserved for Handoff

Wireless & Multimedia Network Laboratory™

Wireless
Multimedia

Thresholds

CS/E

Handoff Threshold
Receiver Threshold

Wireless & Multimedia Network Laboratory™

Who is going to take over Handoff

CS/E

- ◆ Yourself (Mobile Users)
- ◆ Infrastructure Network
 - Base Station
 - Mobile Switching Center

MSC
(Mobile Switching Center)

Wireless & Multimedia Network Laboratory™

Negotiating Procedure

CS/E

- ◆ Base Station
 - detect the receiving signal from MH
 - send a measurement order
- ◆ Mobile Host
 - measure on demand
 - measure all the time

Wireless & Multimedia Network Laboratory™

Hand off Procedure

CS/E

- ◆ Decide the New Base Station
 - MSC picks the best for MH
 - MSC picks the candidate MH specify
- ◆ New Base Station decides to accept or not ?

Wireless & Multimedia Network Laboratory™

Call Queueing Scheme

CS/E

- ◆ Queue for a channel, handoff threshold, receiver threshold

Wireless & Multimedia Network Laboratory™

Trends in Hand over Design

CS/E

- ◆ Hand over and Hand off are the same
- ◆ Small cells -> more hand over
 - allocate network resource to reroute the call to the new base station
 - if not quick enough, QoS will drop dramatically

QoS ←————→ Hand off

Wireless & Multimedia Network Laboratory™

Mobility Solution CS/E

- ◆ Multi-tiers
 - micro-cell and macro-cell
 - based on the speed
 - different schemes

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

Velocity Estimation CS/E

- ◆ Doppler Frequency is known -> Estimation of the velocity of the mobile users
- ◆ Mobility is estimated from the time spent in a cell

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

Handoff in Cellular Networks CS/E

- ◆ Transfer of mobile to a new channel when it crosses cell boundary
 - identify new base station, assign new channel
 - hand-off initiated at a carefully chosen signal level
 - avoid triggering handoff due to momentary fades

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

Hand-off CS/E

- ◆ Handoff delay & interruption
 - dropped (or on hold) connection if signal too low before handoff processed
 - performance degradation (disruption) in data stream
- ◆ Prioritizing handoffs to reduce probability of dropped call
 - connection dropped if no spare channels in new cell
 - guard channel : subset of channels reserved for handoff requests works well with DCA
 - handoff queuing : time interval between handoff trigger & connection drop cell overlap, speed of mobile

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

Handoff in Cellular Networks CS/E

- ◆ Probability of unnecessary Handoffs
- ◆ Hard vs. Soft handoff
- ◆ Hand off rate
- ◆ Handoff also triggers rerouting in the network layer
- ◆ Handoff is tightly coupled to DCA, MAC, and Networking Routing

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

Handoff Strategies (I) CS/E

- ◆ Network controlled handoff (NCHO)
 - used in first generation analog cellular systems
 - link quality is only monitored by the serving BS and surrounding BS
 - handoff decision is made by the network (typically central agent)
 - handoff delays of several seconds (10) and infrequent link quality updates

Wireless & Multimedia Network Laboratory™ Wireless Multimedia

Handoff Strategies (II)

CS/E

- ♦ Mobile assisted handoff
 - used in second generation digital cellular system
 - both the mobile and the serving BS measure link quality
 - only mobile measures link quality of alternate BSs
 - mobile periodically sends the link quality measurements to serving BS
 - handoff decision is made by the network
 - handoff delays of few seconds (1-2) and frequent link quality updates



Wireless & Multimedia Network Laboratory™



Handoff Strategies (III)

CS/E

- ♦ Mobile controlled hand off
 - used in some new digital cellular systems
 - link quality measurements as in MAHO
 - serving BS relays link quality measurements to mobile
 - handoff decision is made by the mobile
 - handoff delays of about 100 ms




Wireless & Multimedia Network Laboratory™



Handoff Scenario

CS/E

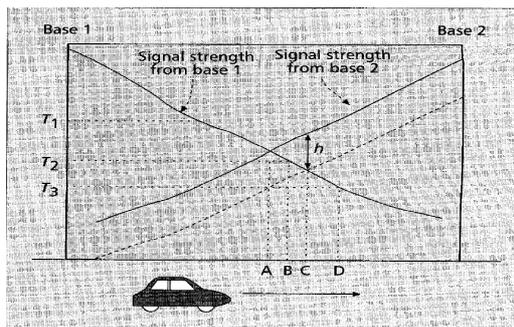

Wireless & Multimedia Network Laboratory™



Handoff Initiation Strategies

CS/E

- ♦ Relative signal strength
 - Always choose the strongest received BS
 - Too many unnecessary hand-offs
- ♦ Relative signal strength with threshold
 - Current signal < threshold, and other BS is stronger
 - May let MH stray too far into other cell; overlapping cell coverage
 - Effectiveness depends on knowledge of cross-over signal
- ♦ Relative signal strength with hysteresis (plus optionally dwell timer)
 - Hand-off only if new BS's signal is stronger by a hysteresis margin
 - Prevents ping-pong effect from rapid fluctuations
- ♦ Relative signal strength with hysteresis & Threshold
 - Hand-off only if current BS's signal below a threshold, and new BS's signal is stronger by the hysteresis margin
- ♦ Prediction techniques
 - Decide based on expected future value of received signal strength


Wireless & Multimedia Network Laboratory™



Handoff Queueing

CS/E

- ♦ Goal is to reduce handoff failure probability
 - Better to block a new call than to drop an existing one
 - Exploits overlap between cells to queue hand-off request in advance




- ♦ Handoff request is issued according to handoff initiation strategy
 - Request is queued
 - Decision must be made (handoff or failure) while MH still in handoff interval

Wireless & Multimedia Network Laboratory™



Cell Splitting

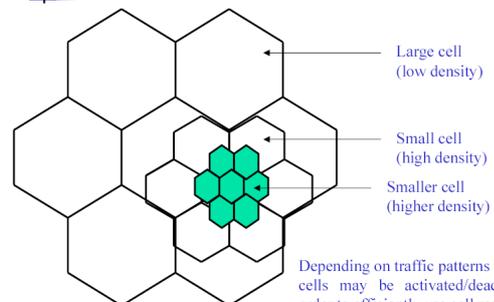

Wireless & Multimedia Network Laboratory™



Cell Sectoring by Antenna Design

(a). Omni (b). 120° sector (c). 120° sector (alternate)

(d). 90° sector (e). 60° sector

Wireless & Multimedia Network Laboratory™

Cell Sectoring by Antenna Design

- Placing directional transmitters at corners where three adjacent cells meet

Wireless & Multimedia Network Laboratory™

Worst Case for Forward Channel Interference in Three-sectors

$$\frac{C}{I} = \frac{C}{q^{-\gamma} + (q + 0.7)^{-\gamma}}$$

Wireless & Multimedia Network Laboratory™

Worst Case for Forward Channel Interference in Six-sectors

$$\frac{C}{I} = \frac{C}{(q + 0.7)^{-\gamma}}$$

Wireless & Multimedia Network Laboratory™

Handoff Parameters

Mobility Support~ Handover


Channel Allocations: Reuse

Wireless & Multimedia Network Laboratory™

Performance Index

- Traffic Request: (QoS)
 - New Call Probability
 - Handoff Call Probability
 - Traffic Requirements (Bandwidth, delay)
 - Call Holding Time
 - Dwell Time (Channel Occupation) for a handoff call or new call
 - Delay/Distance/Un-necessary handoff
- Mobility:
 - Resident time in a cell
 - Hand off rate
- Channel Resource:
 - Channel assignment
 - Blocking Rate (New Call blocking rate, Handoff blocking rate)

Wireless & Multimedia Network Laboratory™

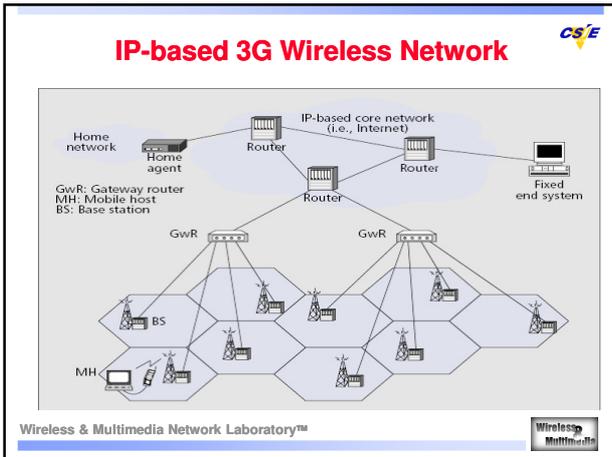

Multi-path Effect (Time)

- ◆ RMS > Symbol Duration:
 - ISI (handled by Equalizer)
- ◆ RMS < Symbol Duration:
 - More than one paths signal arrive (might have different phases)

Intersymbol Interference (ISI)

Wireless & Multimedia Network Laboratory™

Coherence Bandwidth (Bandwidth)

- ◆ Coherence Bandwidth < BW of signal:
 - Frequency Selective Fading
- ◆ Coherence Bandwidth > BW of signal:
 - Flat Fading

Channel

Wireless & Multimedia Network Laboratory™

BS and BS list in MS

-< BS list architecture in mobile host >

IP address	Beacon signal strength
163.152.200.36	-60 dBm
163.152.19.34	-90 dBm
163.152.19.32	-80 dBm

Wireless & Multimedia Network Laboratory™