


無線網路多媒體系統 Wireless Multimedia System (Topic 3)

Wireless Link I: Fundamental issues of Modulation and Multiple Access


吳曉光博士
<http://wmlab.csie.ncu.edu.tw>




How to deal with Radio Propagation

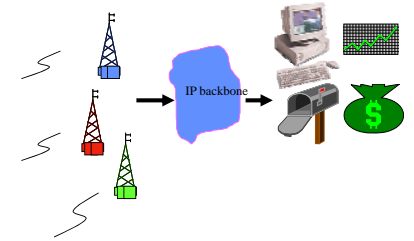


Where are you from?

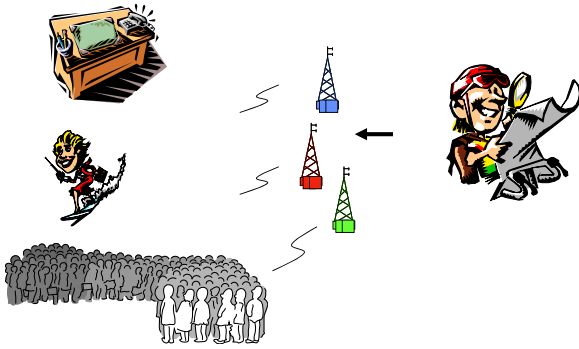

QoS and Multimedia Traffic Support

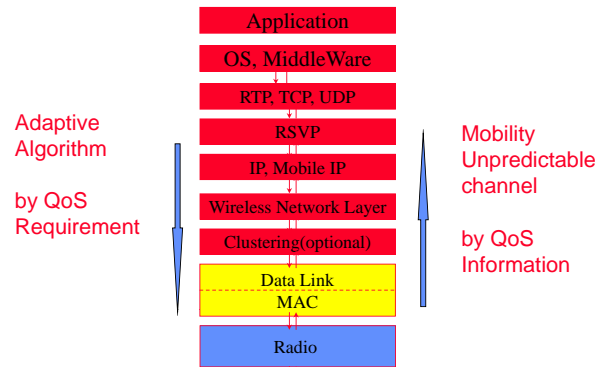

Multiple Access & Modulation

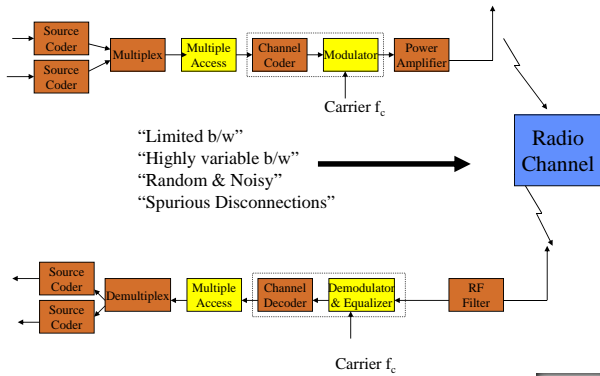


Topic III Agenda

- ♦ **Wireless Link**
 - Deployment of “Pervasive Computing” and “Seamless Telecom services”
 - Channel resource sharing in time, frequency, and code dimensions
 - Spread Spectrum-direct sequence, frequency hopping, interference resistance
 - Static techniques: TDMA, FDMA, CDMA
 - Random access techniques: MACA, MACAW, 802.11 etc



What kind of multiple access environments?



Wireless & Multimedia Network Laboratory™



Reading list for This Lecture



Required Reading:

- (Bhargavan94) V. Bhargavan, A. Demers, S. Shenker, L. Zhang, "MACAW: A Medium Access Protocol for Wireless LANs, Proceedings of SIGCOMM'94 (J.J.97) L. Fuller and J.J. Garcia-Luna-Aceves, Solutions to Hidden Terminal Problems in Wireless Networks, Proceedings of SIGCOMM'97
- (Jing 2006) J. Zhu, B. Metzler, X. Guo, Y. Liu, "Adaptive CSMA for Scalable Network Capacity in High-Density WLAN: A Hardware Prototyping Approach", Proceedings of Infocom 2006.

Further Reading

- (David 95) David D. Falconer, F. Adachi, and B. Gudmundson, "Time Division Multiple Access Methods for Wireless Personal Communications", IEEE Communication Magazine January 1995
- (Vadu2000) Vaduvur Bharghavan, "Achieving MAC Layer Fairness in Wireless Packet Networks", IEEE MobileCom2000
- (Songwu Lu2000) Haiyun Luo, Songwu Lu, Vaduvur Bharghavan, "A New Model for Packet Scheduling in Multihop Wireless Networks", IEEE MobileCom2000
- (J.J.2001) L. Bao A New Approach to Channel Access Scheduling for Ad hoc Networks, IEEE MobileCom2001
- (Alex2001) A. Woo, David E. Culler, "A Transmission Control Scheme for Media Access in Sensor Networks", IEEE MobileCom2001
- (Gavin2001) G. Holland, N. Vaidya, P. Bahl, "A Rate-Adaptive MAC Protocol for Multi-Hop Wireless Network, IEEE MobileCom2001

Wireless & Multimedia Network Laboratory™



Pervasive Computing Projects




Packet Oriented -> Multimedia Traffic

Wireless & Multimedia Network Laboratory™



Smart Kindergarten (UCLA)

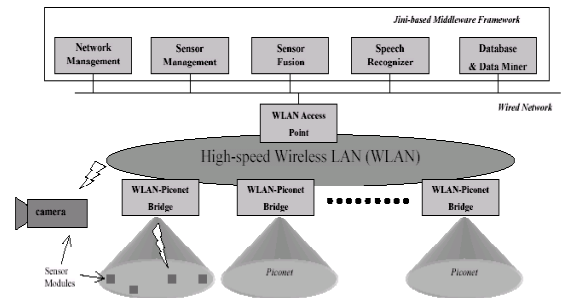


Wireless & Multimedia Network Laboratory™



Cricket Location-Support System (MIT)




- Beacon broadcast <-> Listeners
- Cricket Location-support system

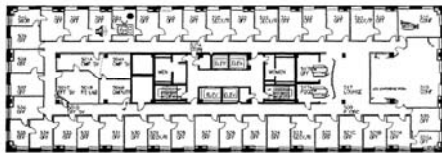

Wireless & Multimedia Network Laboratory™




Making Computer Disappear (Stanford) ADS (Appliance Data Services)

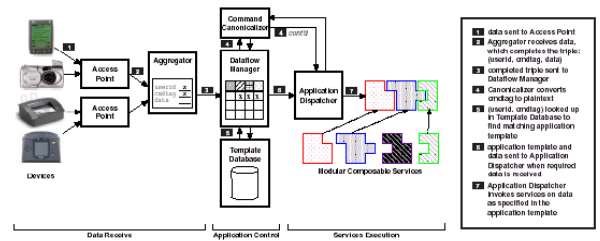

Wireless & Multimedia Network Laboratory™



M-Links (Xerox)

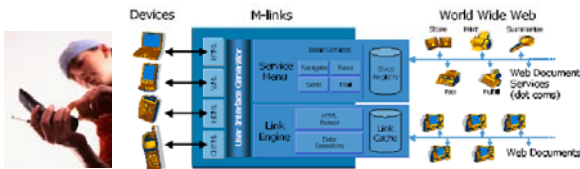

Seamless Telecom Deployments



Circuit Services -> Data Services -> Multimedia




2.5 G & 3 G



Packet Radio
Packet Backbone



System Integration
Multimedia Services
Mobile Computing

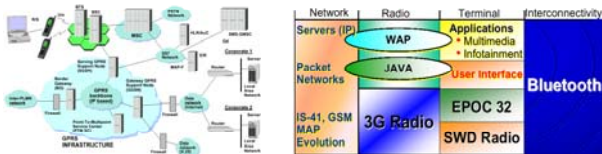

Wireless Networking Technology



Telecom & Datacom

Circuit & Packet



MAC Design Issues



- ♦ What kind of Resource we have?
- ♦ How much you need and how often and how regular you need?
- ♦ How often you will initial request?
- ♦ How much traffic you could afford?
- ♦ How much "Promise" you could provide?
- ♦ How fair you are going to be?
- ♦ Control or "Let it be"?
- ♦ Power Saving Issues?
- ♦ Complexity?




Circuit Switch



- ♦ Cellular System
 - AMPS
 - GSM
- ♦ Voice System
 - Continue Traffic
- ♦ Circuit Set up
 - Reserve A trunk



HOW about Data

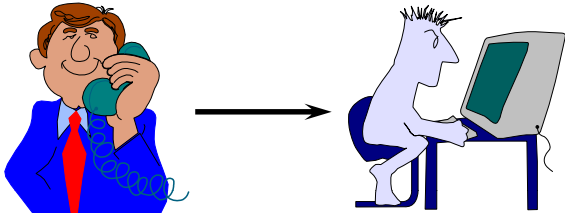

Packet Radio



- ◆ **Packet Nature**
 - If we could deliver information by packet
 - Bursty Type of Traffic
 - Packet Size



CSMA with Collision Detection/Avoidance



- ◆ **CSMA/CD: enhancement to slotted or unslotted CSMA schemes**
- ◆ **Node monitors its own transmission**
 - If collision detected, transmission is aborted without waiting for a NACK backoff and re-transmission procedure started
 - A jamming signal may be sent to get everybody else to abort too
- ◆ **Problem: does not work with RF wireless**
 - Cannot easily sense the channel while transmitting
 - MH's signal will dominate, need different receiving and transmitting antenna patterns
- ◆ **But, does work well with infrared wireless.. Directional receivers**
- ◆ **Wireless networks stick with ACK/NACK approach**
 - Popular called CSMA/CA
 - 802.11



RANDOM Access



- ◆ **Give everybody freedom**



Hawaii Story




- ◆ **University of Hawaii**
- ◆ **ALOHA**
 - Hello and Goodbye




Multiple Access




- ◆ **Fundamental Problem**
 - How to share the Time-Frequency Space among multiple co-located transmitters?

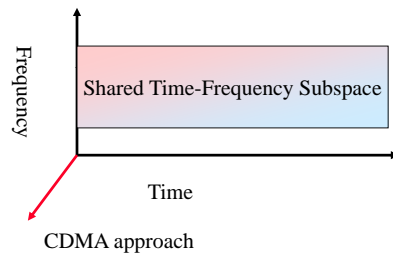

Base-station versus Peer-to-Peer Models




Base-station
(infrastructure-centralized)



Peer-to-Peer
(ad hoc network-
Fully-connected vs multihop)



Approaches to Wireless Multiple Access

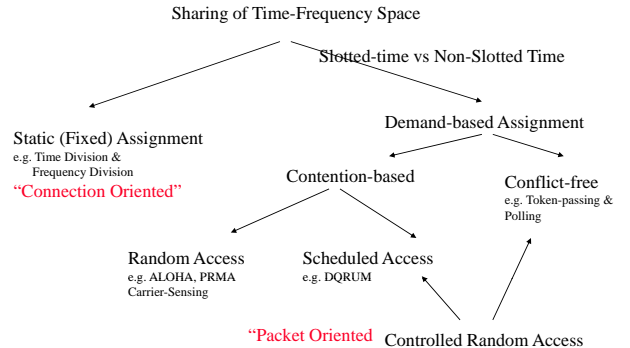

Frequency Division & Time Division Duplexing



Frequency Division Duplexing (FDD)

- Two distinct frequency at the same time for the two directions
- Frequency separation must be coordinated to allow cheap RF technology
- Coordination with out-of-band users between the two bands
- Geared towards providing individual frequencies for each user



Time Division Duplexing (TDD)

- Two distinct sets of time slots on the same frequency for the two directions
- Time latency because only quasi-duplex
- No need for RF duplexer




Frequency Division Multiple Access (FDMA)



Assign different frequency bands to individual users or circuits

- Frequency band ("channel") assigned on demand to users who request service
- No sharing of the frequency bands: idle if not used
- Usually available spectrum divided into number of "narrowband" channels
 - Symbol time >> average delay spread, little or no equalization required
- Continuous transmission implies no framing or synchronization bits needed
- Tight RF filtering to minimize adjacent band interference
- Costly bandpass filters at basestation to eliminate spurious radiation
- Usually combined with FDD for duplexing

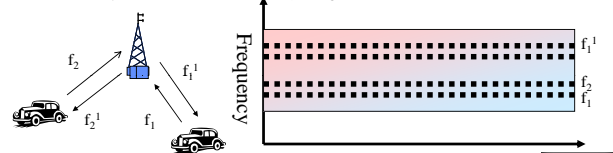

Example-AMPS Cellular System



User FDMA/FDD

- A channel is a pair of frequency duplexed simplex channels
- Each simplex channel is 30 KHz
- Simple channels are separated by 45 MHz (allow cheap RF duplexers)
- Forward link 869-894 MHz, reverse link 824-849 MHz
- Two carriers per market share the channels

Number of supported channels in AMPS

$$N = \frac{B_{total} - 2B_{guard}}{B_{channel}} = \frac{12.5MHz - 2(10kHz)}{30kHz} = 416$$

Problem: set of active users is not fixed

- How is the FDMA/FDD allocated to a user who becomes active?
 - Static multiple access is not a complete solution .. Need a separate signalling channel with "demand-access".
 - Pure FDMA is basically "dead" in the digital world




Time Division Multiple Access (TDMA)



Multiple user share frequency band via cyclically repeating "time slots"

- "channel"==particular time slot reoccurring every frame of N slots
- Transmission for any user is non-continuous: buffer-and-burst digital data & modulation needed, lower battery consumption
- Adaptive equalization is usually needed due to high symbol rate
- Larger overhead-synchronization bits for each data burst, guard bits for variations in propagation delay and delay spread
- Usually combined with either TDD or FDD for duplexing
 - TDMA/TDD: half the slots in a frame used for uplink, half downlink
 - TDMA/FDD: identical frames, with skew (why), on two frequencies



TDMA



- ◆ **More features**
 - Simply mobility & link control.. Snoop for other BSs during idle slots
 - Pulsating power envelop:interference with devices such as hearing aids
- ◆ **Possible enhancements to basic TDMA to integrate non-voice services**
 - Different # of slots per frame to different users (variable bit rate)
 - Dynamically reassign time slots for "bandwidth on demand"

Wireless & Multimedia Network Laboratory™



Packet Radio



- ◆ **Packet Nature**
 - If we could deliver information by packet
 - Bursty Type of Traffic
 - Packet Size

Wireless & Multimedia Network Laboratory™



CSMA with Collision Detection/Avoidance



- ◆ **CSMA/CD:enhancement to slotted or unslotted CSMA schemes**
- ◆ **Node monitors its own transmission**
 - If collision detected, transmission is aborted without waiting for a NACK backoff and re-transmission procedure started
 - A jamming signal may be sent to get everybody else to abort too
- ◆ **Problem: does not work with RF wireless**
 - Cannot easily sense the channel while transmitting
 - MH's signal will dominate, need different receiving and transmitting antenna patterns
- ◆ **But, does work well with infrared wireless.. Directional receivers**
- ◆ **Wireless networks stick with ACK/NACK approach**
 - Popular called CSMA/CA
 - 802.11

Wireless & Multimedia Network Laboratory™



RANDOM Access



- ◆ **Give everybody freedom**



Wireless & Multimedia Network Laboratory™



Hawaii Story



- ◆ **University of Hawaii**
- ◆ **ALOHA**
 - Hello and Goodbye



Wireless & Multimedia Network Laboratory™



ALOHA System




- ◆ **If you want, transmit**
- ◆ **If no acks**
 - wait a random time
 - transmit the same packet again
- ◆ **Problem ?**
 - Collision ?
 - A lot of Users ?



Wireless & Multimedia Network Laboratory™



Pure ALOHA Throughput

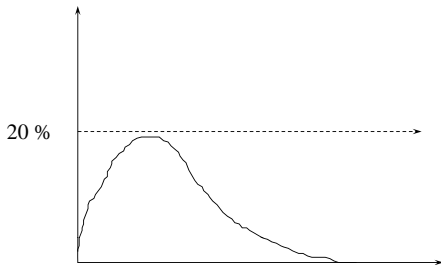


Traffic Load

Wireless & Multimedia Network Laboratory™



Slotted ALOHA Throughput

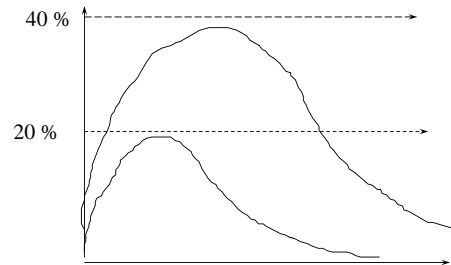


Traffic Load

Wireless & Multimedia Network Laboratory™



Slotted ALOHA

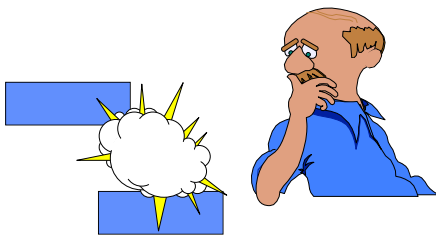

Maybe We could do some arrangement ?

Wireless & Multimedia Network Laboratory™



QoS & Delay



Traffic Load

Wireless & Multimedia Network Laboratory™ DELAY



Whenever Users are many



- ◆ No one will succeed
- ◆ Collides all the time



Wireless & Multimedia Network Laboratory™



Reason



- ◆ No one really listen to other people
- ◆ No one really cares



Wireless & Multimedia Network Laboratory™



CSMA



- ◆ Most LANs use CSMA
- ◆ Carrier Sense
 - CSMA/CA: Collision Avoidance
 - CSMA/CD: Collision Detection




CSMA



- ◆ Check if carrier is ok
- ◆ if the channel is free
 - transmit
- ◆ Otherwise, if the channel is busy
 - wait a random time and try again
 - Back of a random time



CSMA

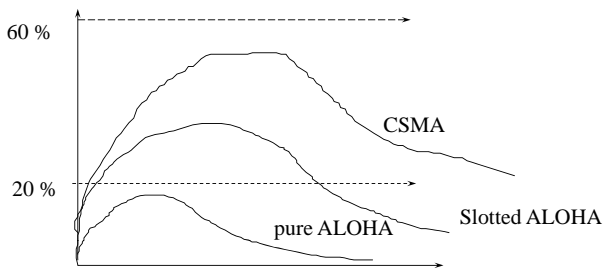

Integrated CSMA/TDMA MAC Protocol



- ◆ Hybrid of reservation and Random Access
- ◆ A frame is segmented into:
 - Two reservation intervals for isochronous traffic
 - One interval for random access traffic



Can Support AP or Ad Hoc




- ◆ AP (Access Point)
- ◆ Ad HOC
 - Coordination Function will be distributed among all of the nodes of the ad hoc network



Challenge of Wireless Network




- ◆ Does "listen before you talk" work ?

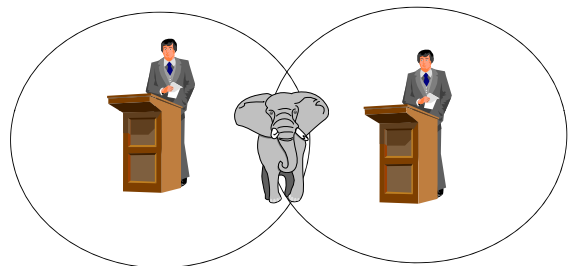

Hidden Terminal



- Due to transmission range

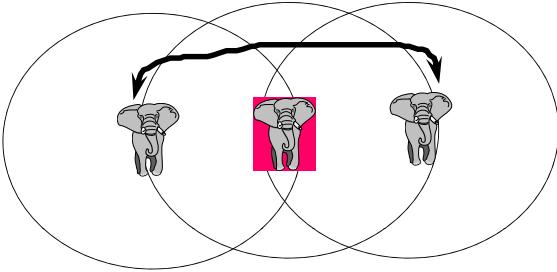


Carrier Sense Multiple Access (CSMA)




- To avoid collision, sender senses the carrier before transmission. But collision occurs at the receiver not transmitter.
- Hidden Terminal -

- Exposed Terminal-



Multiple Access Collision Avoidance (MACA)




- Request-To-Send (RTS) packet: A to B.
- Clear-To-Send (CTS) packet: B to A.
- Node overhearing RTS will defer until A receive CTS.
- Node overhearing CTS will defer until B receive data.
- What do the above two features achieve (Hidden Terminal and Exposed Terminal)?



Hidden Terminal Problem Still Exists (1)




- Data packet still might suffer collision

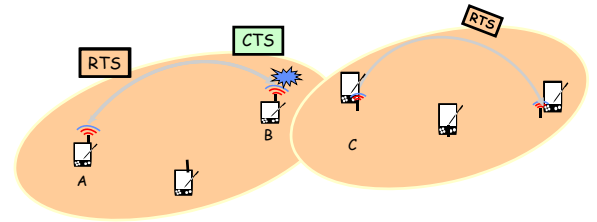

Hidden Terminal Problem Still Exists (2)




- Data packet still might suffer collision

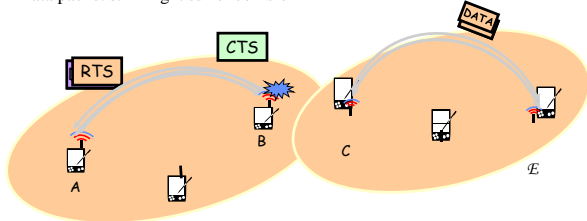

Exposed Terminal Problem Still Exists



- Node C can not receive CTS

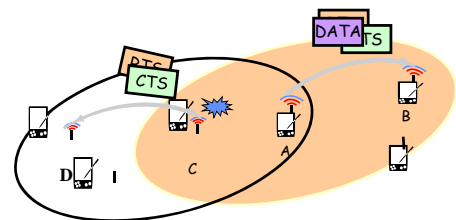

MACAW



Features

- ◆ Backoff algorithm.
- ◆ Multiple Stream model.
- ◆ Basic Message Exchange
 - ACK
 - DS
 - RRTS



Backoff Algorithm



- ◆ The algorithm used in MACA: Binary Exponential Backoff (BEB).
 - Maintains a Backoff counter (BO)
 - BO is doubled after every collision
 - Reduced to minimal BO after every successful RTS-CTS exchange.
 - Sender waits for an interval chosen randomly between 1 and BO.
 - $F_{inc}(x) = \text{MIN} [2x, BO_{max}]$
 - $F_{dec}(x) = BO_{min}$
- ◆ Results in unfair sharing of bandwidth.




Modifications used in MACAW



1. After every successful transmission all pads are made to have the same BO. (What is the problem with this?).
2. Gentler adjustment (MILD):
 - Upon collision $F_{inc}(x) = \text{MIN} [1.5x, BO_{max}]$.
 - Upon success $F_{dec}(x) = \text{MAX} [x-1, BO_{min}]$.




RTS/CTS/DATA/ACK

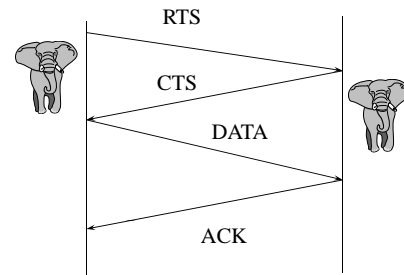

Data Sense Multiple Access (DSMA)




- ◆ Variation of CSMA-also called inhibit Sense Multiple Access
- ◆ Basestation transmits a busy/idle message on a forward control channel
- ◆ Mobile listens on the forward control channel for the busy/idle message
- ◆ Mobile transmits on the reverse channel only if busy/idle message indicates that the reverse channel is free
- ◆ Back-off and retransmit if collision occurs nevertheless
- ◆ Used in CDPD (Cellular digital packet data)

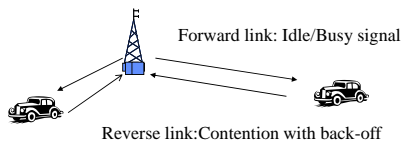

Problems in Contention-based Wireless Multiple Access



- ◆ Near-Far effect-characterized by capture ratio of the receiver
 - Strongest (near by) transmitter can capture the intended receiver
 - Weaker (far away) transmitters get ignored by the receiver
 - Depends on receiver and modulation used
 - Fairness terminal problem
- ◆ Hidden terminal problem
 - Terminal "hidden" from the transmitter may disrupt the receiver
 - Makes carrier sensing ineffective
 - A cannot detect collisions at B due to transmission from C
 - Solve by using RTS/CTS control frame to reserve medium



More on RTS/CTS



- ◆ **RTS/CTS serve to “reserve” the medium**
 - RTS contains length of proposed transmission
 - CTS also contains length of proposed transmission
 - MHs overhearing RTS defer all transmissions until after CTS would have finished (including receiver turnaround time)
 - MHs overhearing CTS defer for length of data packet transmission
 - Retransmission happen only if no CTS is received in reponse to RTS


- ◆ **Binary exponential backoff (BEB) has problems**
 - Does not provide fairness if every MH generate enough traffic to consume the channel
 - After collisions, the less-backed-off mobile wins eventually all but one MD are backed-off to BOMax



Exposed Terminal Problem



- ◆ **C will sense channel busy, and defer, but doesn't need to**
 - The C to D transmission can take place but is delayed

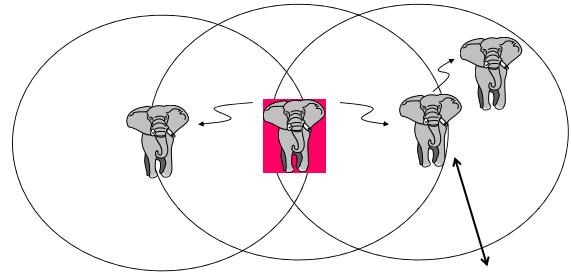

CSMA/CD?



- ◆ **Collision Detection ?**
- ◆ **If a collision is detected, stop transmitting the present packet ?**
- ◆ **Is CSMA/CD possible ?**
 - transmit and receive at the same time ?
 - CSMA wireless network, transmit and receive at the same frequency band
 - unlike Cellular System, uplink and downlink



IEEE 802.11 MAC



- ◆ **Support for multiple access PHYs; ISM band DSSS and FHSS, IR @ 1 and 2 Mbps**
- ◆ **Efficient medium sharing without overlap restrictions**
 - Multiple networks in the same are and channel space
 - Distributed Coordination Function: using CSMA/CA
 - Based on carrier sense mechanism
- ◆ **Robust against interference (e.g. co-channel interference)**
 - CSMA/CA+ACK for unicast frame with MAC level retransmission
- ◆ **Protection against Hidden terminal problem: Virtual Carrier Sense**
 - Via parameterized use of RTS/CTS with duration information
- ◆ **Provision for Time Bounded Services via Point Coordination Points**
- ◆ **Configurations: ad hoc & distributed system connecting access points**
- ◆ **Mobile-controlled hand-offs with registration at new basestation**



Schedule Access-Reservation-based Protocols



- ◆ Also called “Demand Assigned Multiple Access”
- ◆ **Center agent that acts a slot scheduler**
- ◆ **Sender request “reservations” for future time slots**
- ◆ **Central agent assigns a slot**
- ◆ **Data transmission in the assigned slot is done without contention**
- ◆ **Assumption is that data packets >> reservation request packets**
- ◆ **Overhead of reservation and acknowledgement messages**
- ◆ **Trades higher throughput (up to 80% utilization) for higher latency**



Order MAC Techniques



- ◆ **Token Bus and Token Ring**
 - Token are passed among nodes
 - How about wireless network ?
 - ◆ Nodes might leave ?
 - ◆ Break the Order
 - ◆ Take away the token



Basic Scenario

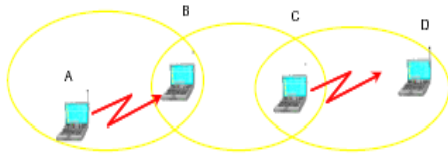


Fig. 1. A is sending a packet to B when C should decide whether to transmit to D.



Hidden and Exposed Stations

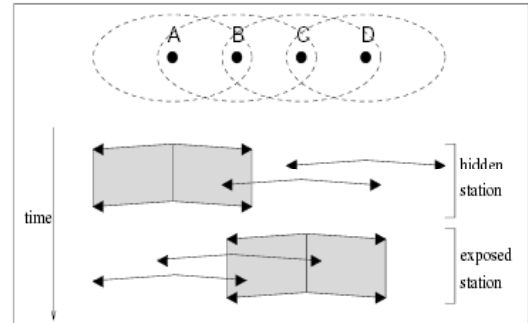


Figure 1: Hidden and Exposed Stations



Capture Effect/Near Far Problem


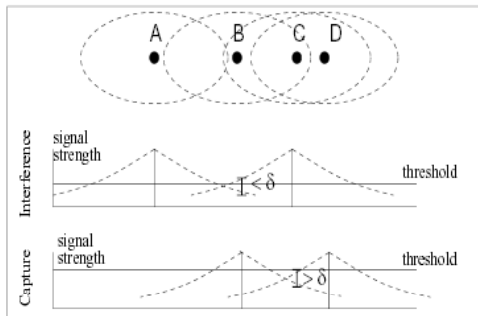



Figure 2: Interference and Capture



802.11 E

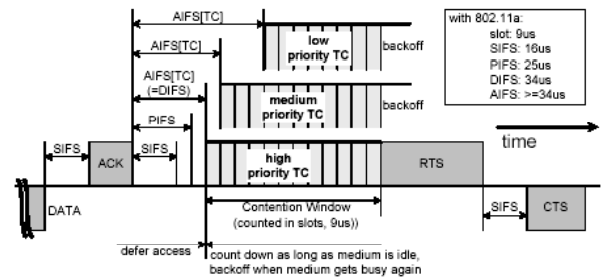

802.11

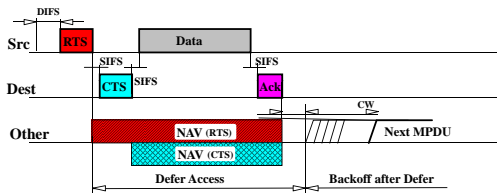

Interference Issue for CSMA/CA




Fig. 1. Effectiveness of RTS/CTS handshake when d is larger than $T_{SNR} + R_t$ and smaller than R_r .





Fig. 2. Effectiveness of RTS/CTS handshake for TWO-RAY GROUND model and SNR threshold of 10.



QoS issue for 802.11

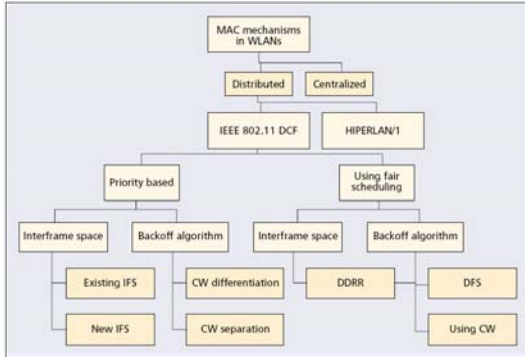

Wireless & Multimedia Network Laboratory™



High-Density (HD) WLAN



- ◆ In HD-WLAN, its overall capacity can be expressed as $L \times S \times C$
 - L – per link capacity
 - C – number of simultaneous trans. Per channel.
 - S – the number of non-interfering channels
- ◆ Hence, the issues of HD-WLAN is
 - How to increase the performance of S.
- ◆ Co-Channel Inference (CCI)


Wireless & Multimedia Network Laboratory™



Clear Channel Assessment (CCA)



- ◆ A station performs CCA before a data trans. to sense the energy in the channel.
- ◆ The station will proceed only if the sampled energy is below a threshold known as the **CCA threshold**.




Wireless & Multimedia Network Laboratory™



Receiving Sensitivity (RS)



- ◆ Today's consumer 802.11 radios are often not able to preempt a receiving process to capture a newly-arrived strong signal.
- ◆ This issue called "stronger-last" collision".

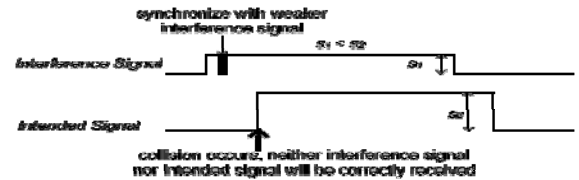

Wireless & Multimedia Network Laboratory™




Analytical Model for RS/CCA Adapt.



- ◆ In 802.11 WLAN research, the logarithm path loss model is widely used to show **average SS** at receiver.

$$P_{RX}(d) = P_{TX}(\bar{d}) \left(\frac{\bar{d}}{d} \right)^\gamma$$

$\gamma = 2$ free-space (LOS)
 $\gamma = 4$ ground reflection



Wireless & Multimedia Network Laboratory™



Only Strong signals triggers Recv.



- ◆ most of the weak signal that causes stronger-last collision will be from device in **co-channel cells**.
- ◆ Hence, let $P_r = RSSI$ be the **RS threshold**, and RSSI stands for **receive signal strength indicator**.
- ◆ However, signal strength is not constant.


$$P_r = \bar{s} - \sigma$$

Wireless & Multimedia Network Laboratory™




CCA adaptation algorithm

- The maximum of measured PER values is used with a simple linear adaptation algorithm.

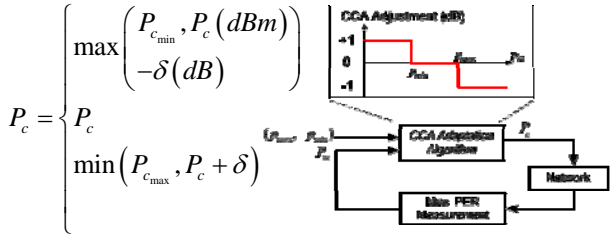


Experimental Topology

- Testbed Setup
 - 8 APs, (cisco Aironet 1130 802.11ABG)
 - N clients with Centrino 2200 and WAG511(11a)

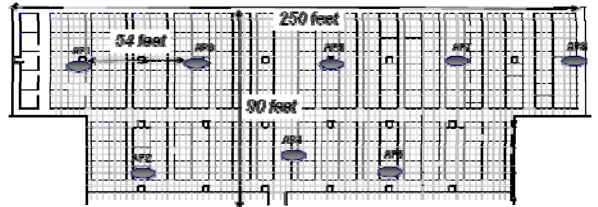


Experimental – Channel Characterization

- 6 clients are deployed, one in each corner of the network.
- HD-WLAN is config. in 802.11g channel 1 using 11dbm as trans. power.
- CL: 3.3, 3.9, 3.3, 3.6, 3.9, 3.5.




Channel Characterization

- Next, CL1-8 are deployed to measure the RSSI between AP1 and AP4.
- In each run, CL samples RSSI received from AP1 and AP4 with a 10-second interval from 4000seconds.



Results of Channel Characterization

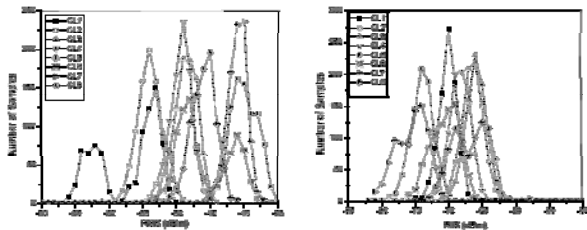


RS Adaptation

- Downlink, UDP traffic to all active CLs with packet size 1400bytes.


$$P_{se} = \max(p_i)_{i=1,2,\dots,n};$$

$$Th = \frac{1}{n} \sum_i x_i;$$

$$F_i = \frac{(\sum_i x_i)^2}{n \sum_i x_i^2};$$

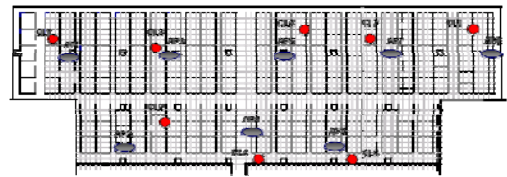

RS Adaptation Results

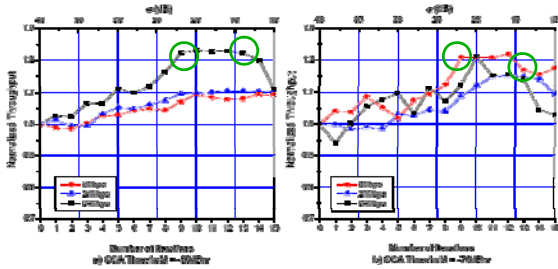

Wireless & Multimedia Network Laboratory™




CCA Adaptation

- ◆ Next, we investigate the effect of the Pm target with CCA adaptation.
- ◆ Four targets
 - $(p_{max}, p_{min}) = \{(0.2, 0.1), (0.3, 0.2), (0.4, 0.3), (0.5, 0.4)\}$ are tested in sequence
 - with total 160 iterations and
 - each one staying 40 iterations.

Wireless & Multimedia Network Laboratory™




CCA Adaptation results

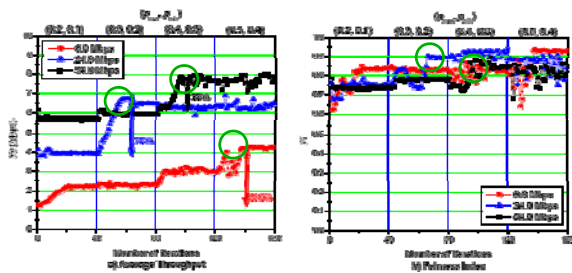

Wireless & Multimedia Network Laboratory™



Dynamic CSMA Scheme

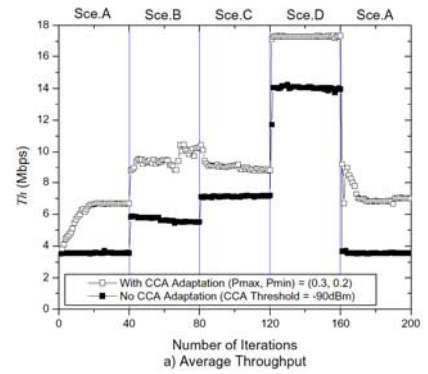

Wireless & Multimedia Network Laboratory™

