


## Topic 9:


### Ad hoc Network (Mesh Network)




Professor Eric Hsiaokuang Wu  
2011

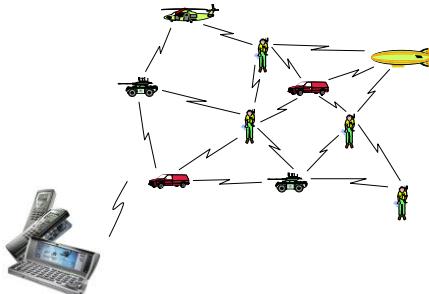

### Wireless Mesh Network.

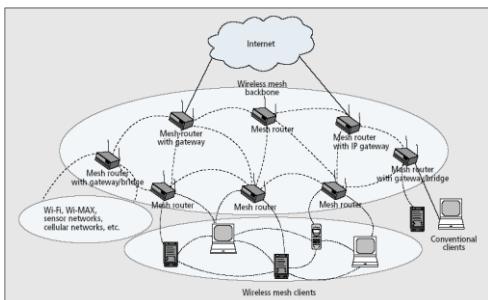


### Multi-channel, Multi-Radio, Directional Antenna



### Two Issues for Collaborative Computing

- Network Layer Collaborative:
  - Ad hoc- Infrastructure-less ~ support "anytime, anywhere"
  - To support communications between ad hoc nodes
    - To guide the packets effectively to satisfy different requirements
    - To adjust to dynamical topology change (due to Mobility)
- Application Collaborative:
  - Video Conferencing, News Broadcasting
  - Group of users to share the same information
  - Mobility Support




### Trend Evolution

- IP success
  - The involvement and level of responsibility of end users have dramatically increased
  - The freedom has fueled creativity
- Infrastructure-less, self-organized networks
  - The network runs solely by operation of end users
  - Progress of electronic integration and wireless communication
  - Complement these infrastructures in cases where cost, constraints, or environment require self-organized solutions
  - Will be interconnected with the Internet and cellular networks



## Mobile Computing to Pervasive Computing

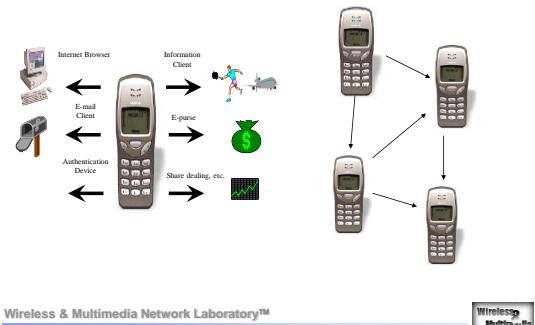

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

CSIE

## Mesh Network Scenario




Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

CSIE

## Why not existing routing protocol

- Existing routing protocol search for shortest path not guarantee any QoS.

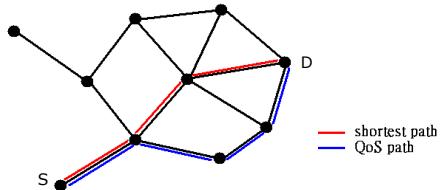


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

CSIE

## Bandwidth influence ~ hidden route problem

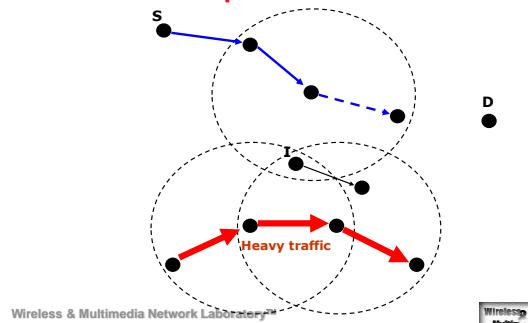


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

CSIE

## Traffic aggregation of existing flow

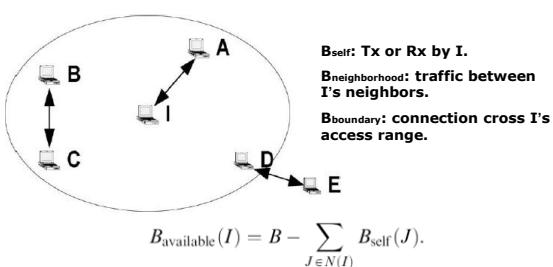

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

CSIE

## 802.11 Bandwidth Estimation







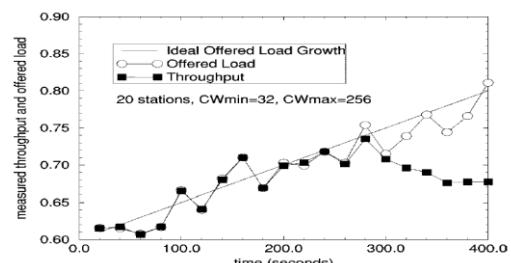


Fig. 3. Measured Throughput with slowly increasing offered load.

Wireless & Multimedia Network Laboratory™


Wireless  
Multimedia

CSIE

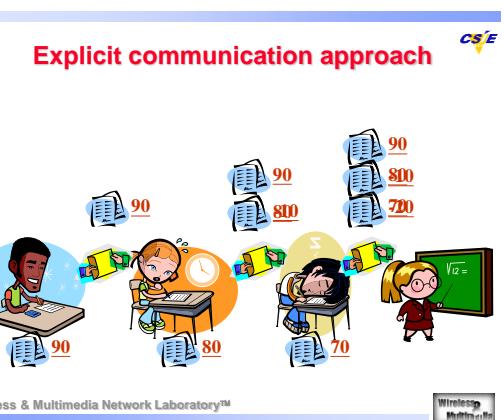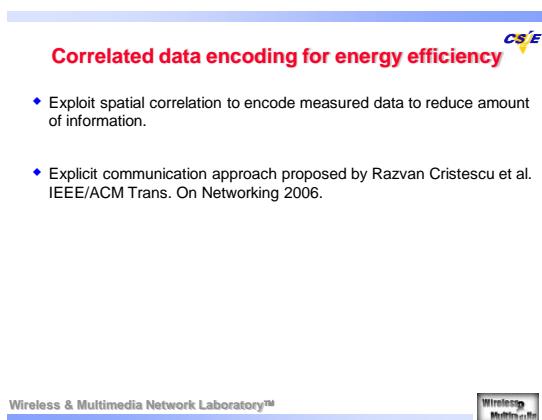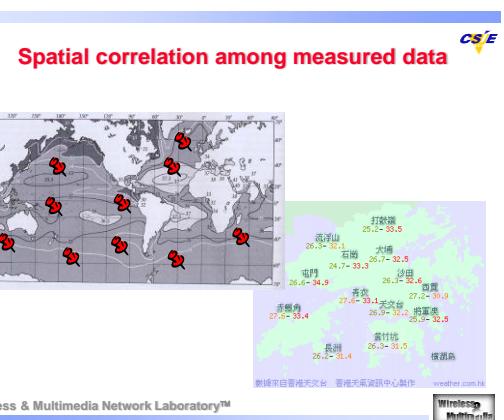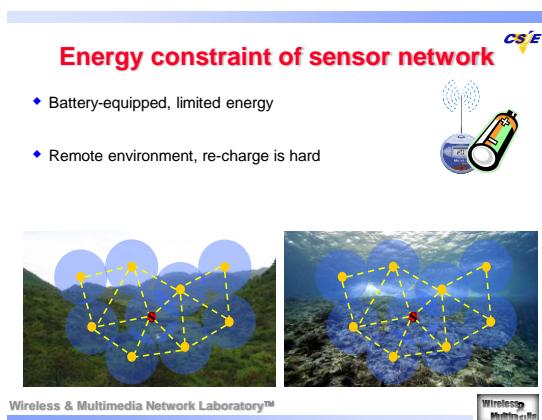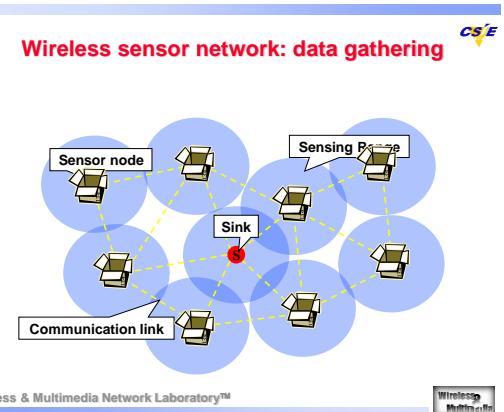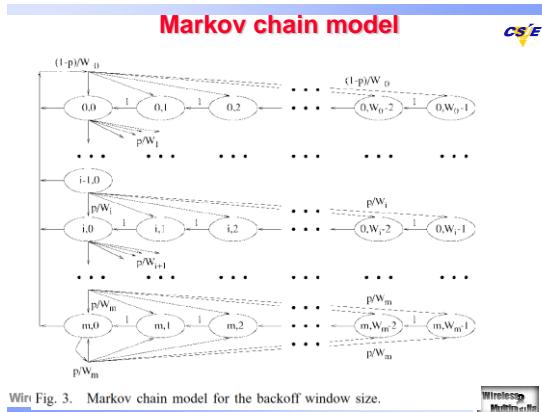

## Explicit communication approach


- $H(X_i)$  is entropy of random variable  $X_i$ , and represents the amount of information.

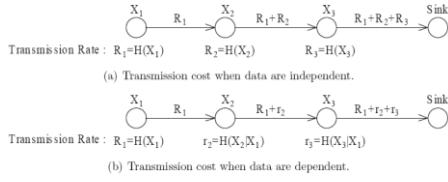

Wireless & Multimedia Network Laboratory™




## Joint optimization of rate allocation and routing path

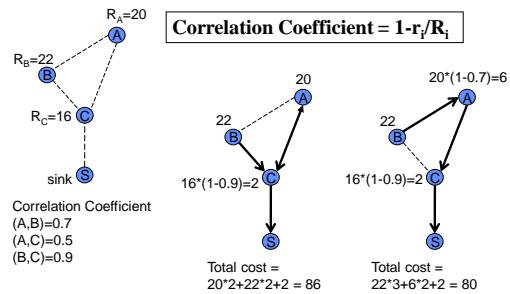

Wireless & Multimedia Network Laboratory™




## Video Transmission in VANET

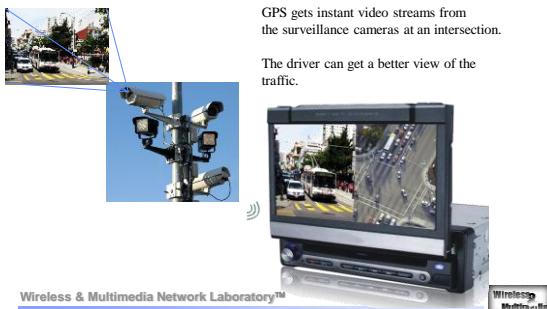

Wireless & Multimedia Network Laboratory™



## What is a VANET (Vehicular Ad hoc Network) ?

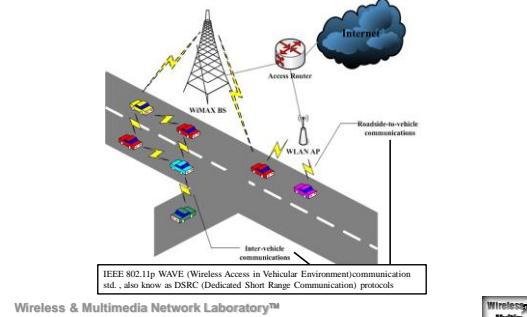

Wireless & Multimedia Network Laboratory™



## VANET vs. MANET

- VANET can be considered as one of concrete applications of MANETs in the future
- The difference between VANET and MANET
  - (i) VANET have vehicles as network nodes and their main characteristics are highly mobility and speed
  - (ii) VANET nodes move non-randomly along specific paths (roads)
  - (iii) VANET nodes are vehicles, so there are less power and storage constraints
- Due to the characteristic of (i) (ii), VANET will suffer *rapid changes in network topology*, and will be subject to *frequent fragmentation*

## Vehicular communications: why?



Wireless & Multimedia Network Laboratory™



Wireless & Multimedia Network Laboratory™



## Applications of vehicular communication


- There are many applications envisioned for VANETs, we can divide the applications into two major categories:
  - Safety-related applications**
    - Collision avoidance
    - Cooperative driving
  - Non-safety (private) applications**
    - Traffic optimization
    - Payment services (toll collections)
    - Location-based services (find the closest fuel station)
    - Infotainment (Internet access)

Wireless & Multimedia Network Laboratory™



Scenario of VANET private applications

## Multicasting infotainment messages

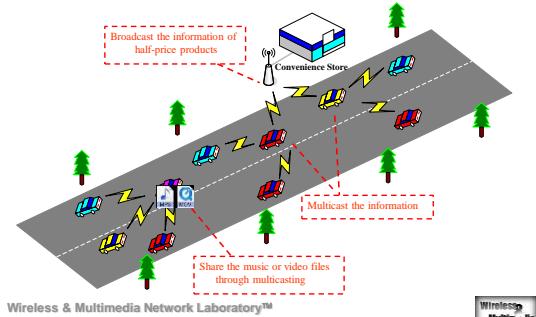

Wireless & Multimedia Network Laboratory™




## Vehicular Ad Hoc Network Scenario

The logo of the Center for Strategic and International Studies (CSIE) is located in the bottom right corner. It consists of the letters "CSIE" in a blue, italicized, sans-serif font, with a yellow, stylized, downward-pointing arrow graphic positioned below the "E".

>more fun.

and easier maintenance

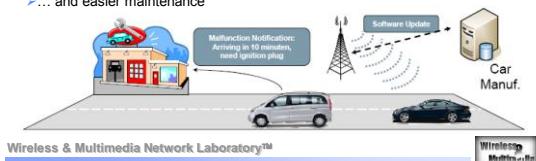


Wireless & Multimedia Network Laboratory™



## Scenario of VANET safety applications


## Multicasting warning messages

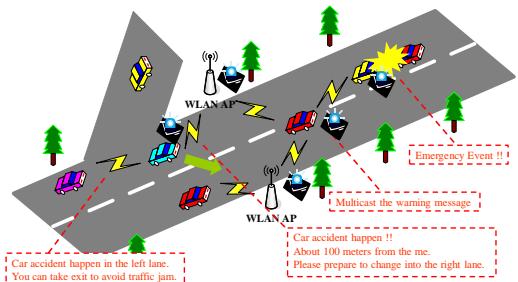

Wireless & Multimedia Network Laboratory™



## Vehicular Ad Hoc Network Scenario

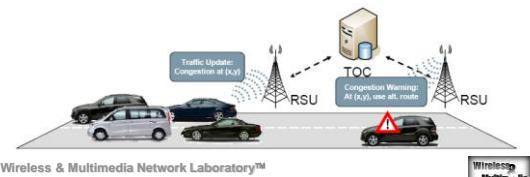


Wireless & Multimedia Network Laboratory™



## Observations

Personal Communications have been the dominant paradigm so far, but mobile ad hoc networks open new possibilities, such as the communication between objects

## Survey of Ad hoc Researches

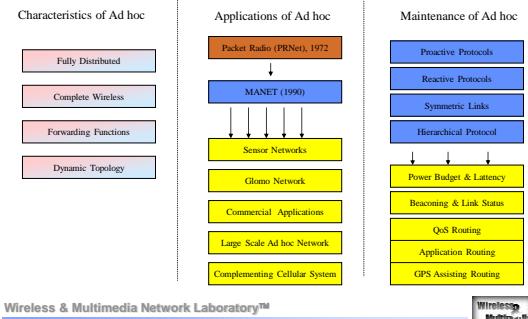

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

CSIE

## Reading

- [Jean2001] Jean-Pierre Hubaux, Thomas Gross, Jean-Yves Le Boudec, and Martin Vetterli, "Toward Self-Organized Mobile Ad Hoc Networks: The Terminodes Project"
- [Ian 2005] Ian F. Akyildiz, A Survey on Wireless Mesh Networks, IEEE Radio Communications September 2005

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

CSIE

## Agenda

CSIE


- Overview of Mobile Ad Hoc Networks
- Major Technical challenges:
  - Networking
  - Real time services
  - Software
- Long-term Research Project:
  - Terminodes Projects

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

CSIE

## Cellular based

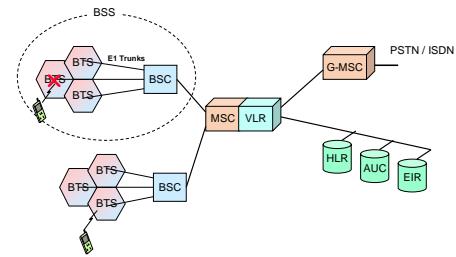

GSM Network Infrastructure

Wireless & Multimedia Network Laboratory™


Wireless  
Multimedia

CSIE

## Ad-hoc network

CSIE


- No centralized controller ( base stations )
- No wired inter-connection backbone
- Forwarding function should be provided by mobile nodes



Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia


CSIE

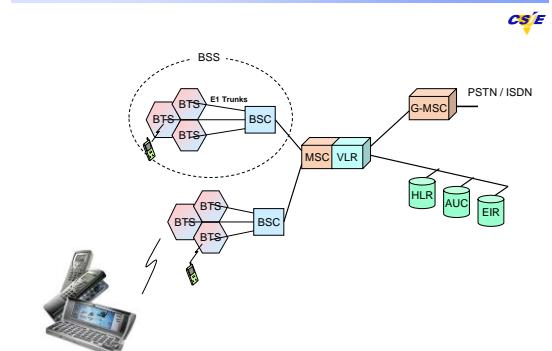


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

CSIE

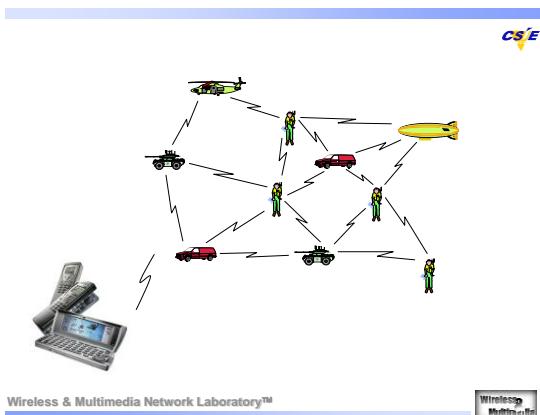


## Mobility in Wireless LANs: Mobile IP

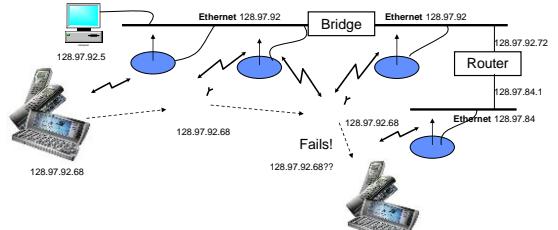

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## QoS and Multimedia Traffic Support

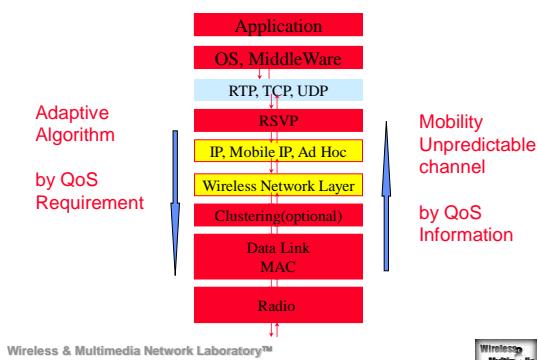

## Introduction

Self-Organized Mobile Ad Hoc Networks

Wireless Multimedia

## Overview (MANET)

- Packet Radio Networks ('70)
  - Research Results
    - Radio Resource Allocation
    - Network Organization
  - An Individual, handheld device
  - Military application (provide person-to-person communications on the battlefield)



Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## MANET

- Potential Applications:
  - Manmade disasters
  - Relief operation
  - Military applications
  - Car-based networks
  - Sensor networks
  - The Provision of wireless connectivity in remote areas
  - Collaborative Computing, Video Conferences

Wireless & Multimedia Network Laboratory™

Wireless Multimedia

## MANET, Peculiarities



- They can act independent of any provider
- They have to be highly cooperative: The tasks are distributed over the nodes
- Any operation is the result of the collaboration of a group of them
- The nodes rely on batteries for their energy, energy saving
- Power aware: the set of functions offered by a node depends on its available power
- Highly dynamic topology
- Security is difficult to implement

Wireless & Multimedia Network Laboratory™



## Technical Issues



- Routing
- Mobility Management
- IP Address
- Transport Layer
- Air Interface
- Security
- Power Management
- Standards and Products

Wireless & Multimedia Network Laboratory™



## Routing



- Ad hoc routing
  - Different from traditional solutions in the Internet or cellular phone networks (relative stable, distributed routing databases)
  - IETF (The Internet Engineering Task Force) MANET address the challenge
  - Distant vector, links state, source routing (table driven, on-demand)
  - Geographic methods: nodes are informed of their own geographic position

Wireless & Multimedia Network Laboratory™



## Routing Protocol



- Traditional Routing
  - Distance Vector ( Bellman Ford )
  - Link State
- Ad Hoc Routing Protocols
  - DSDV
  - DSR
  - AODV
  - TORA

Wireless & Multimedia Network Laboratory™



## Traditional Routing



- Distance Vector ( Table Driven )
  - Each node maintains its own routing table
  - Routing table contains
    - destination node index
    - next hop
    - metric
- Periodic routing table exchange
- Disadvantage
  - Count-Infinity Problem
  - Convergence Problem

A	B	C
B-A-1	A-B-1	B-C-1
C-B-1	C-B-1	A-B-2
0	1	2
x	1	2
x	3	2
x	3	4
x	5	4
x	∞	∞

Wireless & Multimedia Network Laboratory™



## Traditional Routing ( Cont. )



- Link State Routing
- Procedures
  - Neighbor Discovery
  - Routing Information Broadcast
  - Shortest Path Finding ( e.g. Dijkstra's algorithm )
- Disadvantage
  - short-live looping problem

0	1	2	3	4	5	6	7	8	9	10	11	12
0	1	2	3	4	5	6	7	8	9	10	11	12
1	0	1	2	3	4	5	6	7	8	9	10	11
2	1	0	1	2	3	4	5	6	7	8	9	10
3	2	1	0	1	2	3	4	5	6	7	8	9
4	3	2	1	0	1	2	3	4	5	6	7	8
5	4	3	2	1	0	1	2	3	4	5	6	7
6	5	4	3	2	1	0	1	2	3	4	5	6
7	6	5	4	3	2	1	0	1	2	3	4	5
8	7	6	5	4	3	2	1	0	1	2	3	4
9	8	7	6	5	4	3	2	1	0	1	2	3
10	9	8	7	6	5	4	3	2	1	0	1	2
11	10	9	8	7	6	5	4	3	2	1	0	1
12	11	10	9	8	7	6	5	4	3	2	1	0

adjacency matrix

Wireless & Multimedia Network Laboratory™



## Ad Hoc Routing - DSDV




- DSDV
  - Destination Sequence Distance Vector Routing
  - Each route information is labeled with a increasing sequence number
    - Route info. with greatest number will be update
  - Route info. of broken link is broadcast with odd sequence one greater than the original sequence number
- Contribution
  - Main contribution of DSDV is freedom-loop guarantee
- Disadvantage
  - The periodic broadcast adds the overhead into the network

Wireless & Multimedia Network Laboratory™



## Routing in ad hoc network environment only

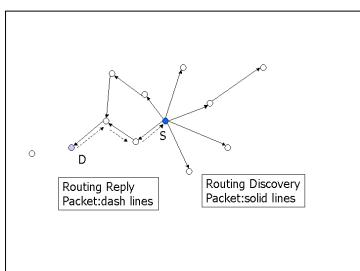


Wireless & Multimedia Network Laboratory™



## Ad Hoc Routing - DSR



- DSR
  - Dynamic Source Routing
  - Route Discovery
    - Source node flooding routing request (RREQ) packet
    - Destination (inter-node) node reply RREP packet that piggybacks the route info.
    - Source node caches the route info
  - Route Maintenance
    - The route info. will be removed after receiving RERR packet
- Advantage
  - Requires no periodical routing exchange
- Disadvantage
  - packet is larger because of carrying route info.




Wireless & Multimedia Network Laboratory™



## Heterogeneous Network Support



- Use of Interface Indices in DSR

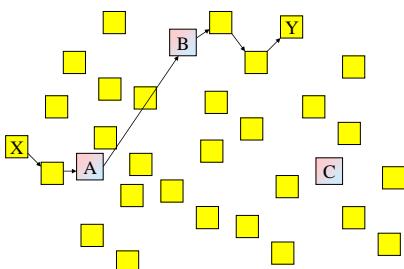


Wireless & Multimedia Network Laboratory™



## Internet Interconnection and Mobile IP




- DSR supports the seamless interoperation between an ad hoc network and the Internet

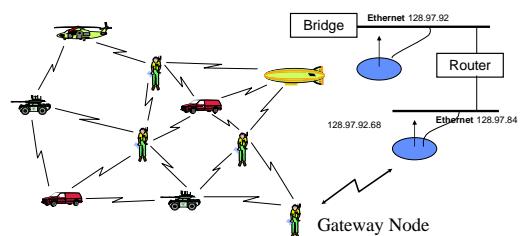

Wireless & Multimedia Network Laboratory™



## On Demand Support Multicast & QoS

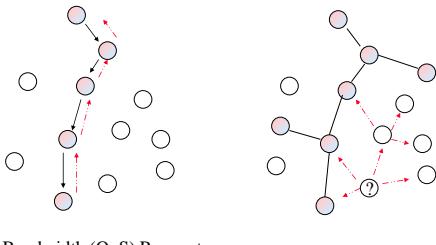

CSIE

## Ad Hoc Routing - AODV

- ♦ AODV

- Ad-hoc On-demand Distance Vector
- Shares the advantages of DSR and distance vector
- Route Discovery
  - ♦ Similar to DSR
- Route Maintenance - Table Entry
  - ♦ Destination IP, Destination Sequence, Hop Count, Next Hop, Life Time
- The route info. is invalid if
  - ♦ Life Time is expired
  - ♦ Receive RERR packet

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

Wireless  
Multimedia

## Ad Hoc Routing - TORA

CSIE

- ♦ TORA
  - Temporally-Ordered Routing Algorithm
  - Routing procedures
    - ♦ Flood QUERY packet
    - ♦ UPDATE packet will be broadcast from destination or inter-node
    - ♦ HEIGHT info. is appended to UPDATE packet
    - ♦ the node receives UPDATE packet set its height and the forwarding UPDATE packet's height to a value one greater than original one
  - Source node send data to the destination via neighbor that have lower height with respect to the destination
- ♦ Advantage
  - Minimizes the reaction due to changes of network topology
- ♦ Disadvantage
  - Depend on Internet MANET encapsulation Protocol, the overhead is large

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

Wireless  
Multimedia

## ABR (Associativity-Based Routing)

CSIE

- ♦ ABR considers the stability of a link.
  - The metric is called **degree of association stability**.
- ♦ Basic Idea:
  - Each node periodically generates a beacon to signify its existence.
  - On receipt of the beacon, a neighboring node will increase the "tick" of the sender by 1.
    - ♦ A higher degree of association stability (i.e., ticks) may indicate a low mobility of that node.
    - ♦ A low degree of association stability may indicate a high mobility of that node.
  - When a link becomes broken, the node will set the tick of the other node to 0.

Wireless & Multimedia Network Laboratory™


Wireless  
Multimedia

Wireless  
Multimedia

## ABR Outline

CSIE


- ♦ Route Discovery:
  - (similar to DSR)
    - ♦ On needing a route, a host will broadcast a ROUTE\_REQUEST packet.
    - ♦ Each receiving host will append its address to the packet.
  - The **association stability** (represented by "ticks") is also appended in the ROUTE\_REQUEST packet.
  - The destination node will select the **best route** (in terms of association stability), and then respond a packet to the source.



Wireless & Multimedia Network Laboratory™


Wireless  
Multimedia

- Route Reconstruction:
  - On route error, a node will perform a local search in hope of rebuild the path.
  - If the local search fails, a ROUTE\_ERROR will be reported to the source.

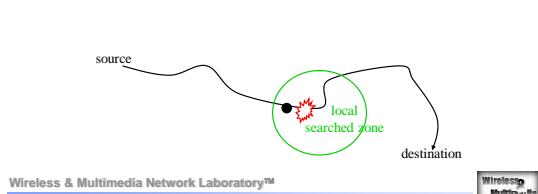

## Mobility Management

- Broadcasting a paging message the whole network: won't scale well
- Different from centralized servers (either HLR in GSM), location must be distributed among the nodes
- Prediction of the future locations




Wireless &amp; Multimedia Network Laboratory™

Wireless Multimedia

## Radio Interface

- CSMA/CA: hidden terminal



- Defining master and slaves roles: Bluetooth

Wireless &amp; Multimedia Network Laboratory™

Wireless Multimedia

## MACA/PR

- The key component
  - the MAC protocol for data transmission
  - Reservation scheme for real-time connection setup
  - QoS Routing algorithm

Wireless &amp; Multimedia Network Laboratory™

Wireless Multimedia

## MACA/PR - MAC


- Data-gram Traffic
  - RTS - CTS - PKT - ACK
  - <RTS,CTS> for hidden terminal avoidance, ACK for retransmission
- Real-Time Traffic
  - <RTS - CTS > - PKT - ACK
  - <RTS,CTS> used for first time transmission to set up the reservation
  - ACK for renewing the reservation, not recovery

Wireless &amp; Multimedia Network Laboratory™

Wireless Multimedia

## MACA/PR - Reservation/QoS Routing

- CYCLE is the max. interval allowed between two real-time packets
- Each node maintains its own reservation table
- DSDV routing is employed
- Bandwidth info. can be easily obtained via reservation table



Wireless &amp; Multimedia Network Laboratory™


Wireless Multimedia

## MACA/PR - Properties



- Asynchronous approach
- Low latency, low packet loss rate
  - Hidden Terminal Problem is solved automatically
- Fair bandwidth sharing
- Good mobility handling
  - Maintain secondary routing path
- Low implementation costs

Wireless & Multimedia Network Laboratory™

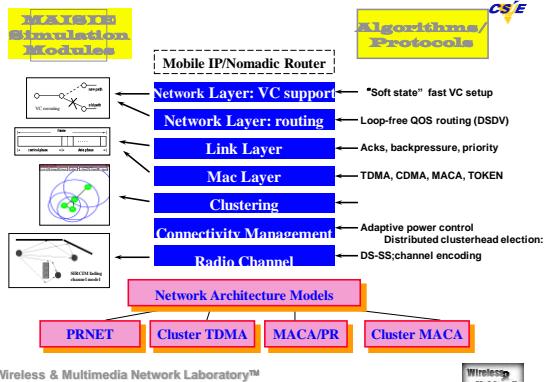


Wireless & Multimedia Network Laboratory™




## Cluster TDMA



Lowest ID Clustering Algorithm




Within each cluster: time-slotted frame



Wireless & Multimedia Network Laboratory™



## Cluster MACA



Wireless & Multimedia Network Laboratory™



## The Paradigm Shift and Some Open Research Questions



MANET

Wireless & Multimedia Network Laboratory™



## Terminodes Projects




- Large scale self-organized mobile ad hoc networks
- All layers and interlayer interactions
  - From physical layer up to software architecture and applications
- Try to capture the business and societal potential
- Three levels:
  - Technical challenges
  - Intellectual fantasy
  - Societal/political vision

## Terminodes

CSIE

- Networking Issues
  - Scalability
  - Virtual Currency
  - Obligation
  - Real Time Services
    - QoS




Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Networking Issues

CSIE

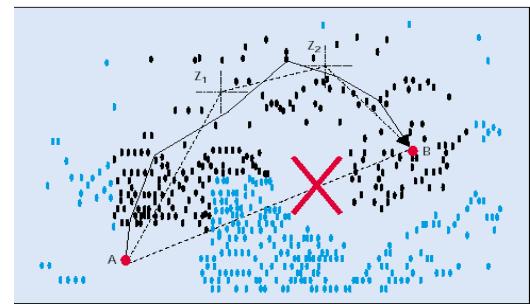


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Greedy Forwarding

CSIE

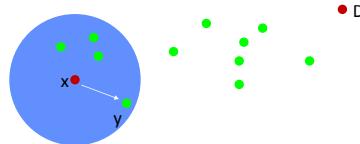


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Greedy Forwarding

CSIE




Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Greedy Forwarding

CSIE




Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Greedy Forwarding

CSIE




Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Greedy Forwarding

CSIE




Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Greedy Forwarding Failure

CSIE




Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Recover Mode (GSR two modes)

CSIE




Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Right hand rule

CSIE




Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Face (Perimeter) traversal on a planar graph

CSIE

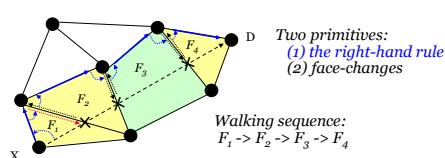


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Scenarios Where GPCR does not work Well

CSIE

For Destination D<sub>2</sub>, the source A has to send to C (junction node) then to B (because it is closer to D<sub>1</sub> than F), then G. Then it goes for recovery mode because G is the local maxima and return back to C. C sends to F and finally Data is sent to D<sub>1</sub>.



For Destination D<sub>1</sub> The source A has to send to C (junction node) then to B (because it is closer to D<sub>1</sub> than F), then G. Then it goes for recovery mode because G is the local maxima and return back to C. C sends to F and finally Data is sent to D<sub>1</sub>.

Wireless  
Multimedia

## Routing for Terminode




- Each Terminode has
  - A permanent unique node identifier, EUI (End System Unique Identifier)
  - Location-Dependent Address (LDA)
- Geodesic Packet Forwarding:
  - The packet is forwarded to the neighbor closest to the direction in which the destination is located
- Terminode local routing
  - MANET routing (link State, Distance Vector, Source Routing)

Wireless & Multimedia Network Laboratory™



## Networking Issues

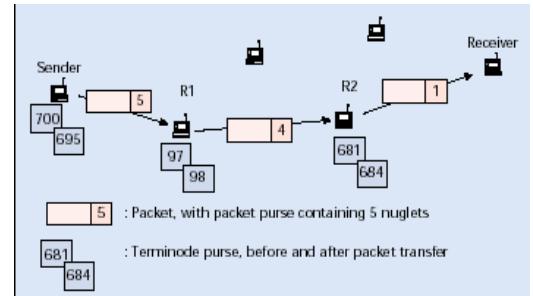

Wireless & Multimedia Network Laboratory™



## Virtual Currency (Nuglet)



- Service Availability is a major requirement for self-organization
- The End users must be given incentive to cooperate
- They must be encouraged to not overload the network

Wireless & Multimedia Network Laboratory™



## Real-Time Services over Ad hoc Networks




- Real-Time Services
  - Voice or video over ad hoc networks
  - Unreliable <-> stringent delay
  - Large error, node failure
- Redundancy, error correction codes over parallel connections

Wireless & Multimedia Network Laboratory™



## Multiple description coding

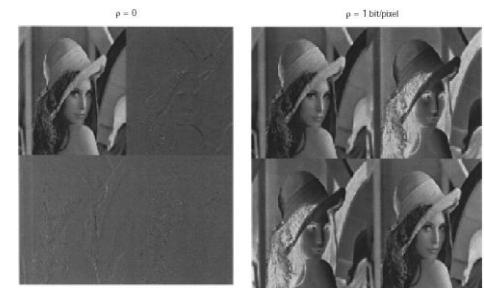

Wireless & Multimedia Network Laboratory™



## Software Aspects



- Software implementations:
  - Base software: Routing algorithms, accounting system and security system
  - Application software: Software that makes a collection of terminodes useful for a client
  - Flexible software architectures
- Resource Allocations
  - Contract
  - Loader
  - Dynamic checks

Wireless & Multimedia Network Laboratory™



## Discussions



- Three Networks:
  - Telecom networks
  - The Internet
  - Self-Organized Mobile Ad Hoc Networks

Network	Infrastructure	Security	Applications
Telecom networks	Telcos	Telcos	Telcos (IN)
Internet	ISPs + telcos	ISPs + users (PGP)	Users
Self-org. ad hoc NW	Users + vendors	Users + vendors	Users