


## 無線網路多媒體系統 Wireless Multimedia System

### Lecture 7: Network Mobility 吳曉光博士

### A IP reference Architecture for Wireless Mobile System

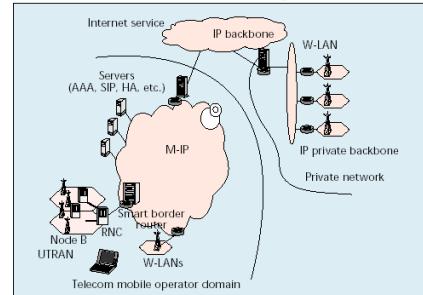

### Agenda

- All-IP System: Beyond 3G
- Evolutions of PCS
- ALL IP Challenges
  - Mobile IP/Cellular IP
  - QoS Provisions: Integrated Service / DiffServ
- Next Week (Wireless TCP)



### Reading


- [Bhagwat96] Pravin Bhagwat, Charles Perkins, and Satish Tripathi, "Network Layer Mobility: An Architecture and Survey

Foreign Agent Tables


Visitor Table		
Host	HA	Timestamp

Home Agent Tables


Home Table		
Host	FA	Timestamp

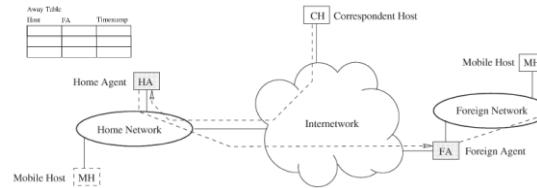


### Register Operation

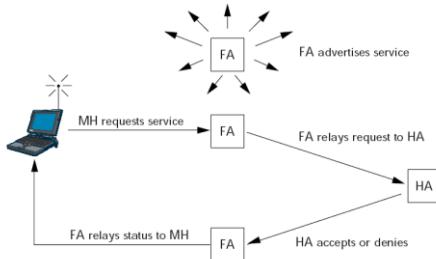

### Tunneling Operation

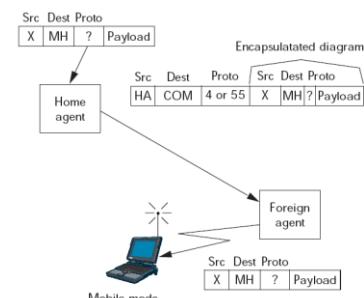

Indirect Routing (Triangular Routing)

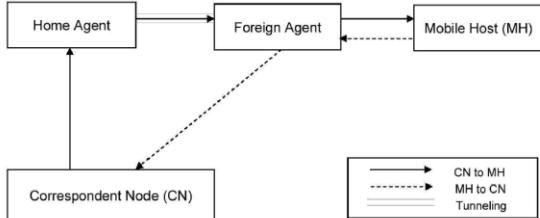


Wireless & Multimedia Network Laboratory™

#### Wireless

## Mobility Management


- ◆ Micro-Mobility
- ◆ Network Mobility

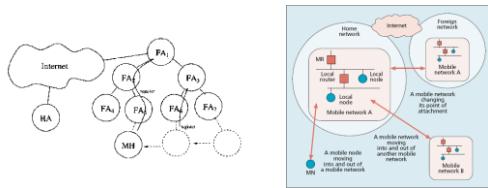

Wireless & Multimedia Network Laboratory™

## Wireless


## MT Scheduler

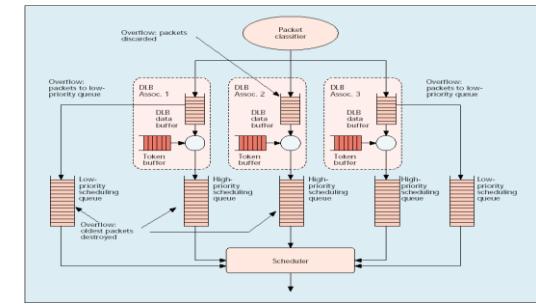

Wireless & Multimedia Network Laboratory™

Wireless

## RO (Route Optimization)

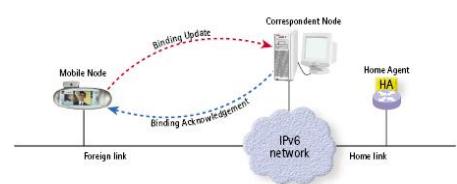

Wireless & Multimedia Network Laboratory™

## Wireless


All IP



## Something to happen?

## Wireless


## Integration Scenario

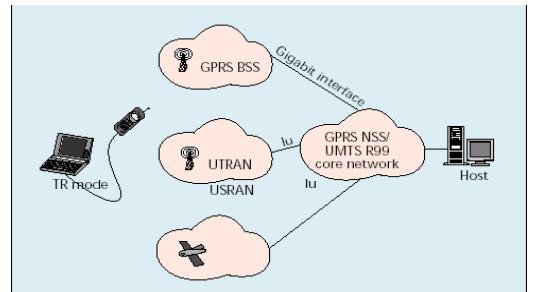

Wireless & Multimedia Network Laboratory™

### Wireless


## Resource Managements

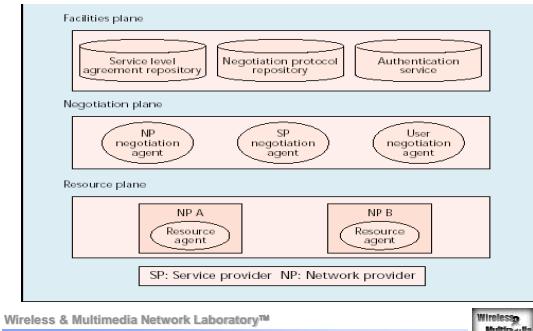

Wireless & Multimedia Network Laboratory™

CSIE

## WAL

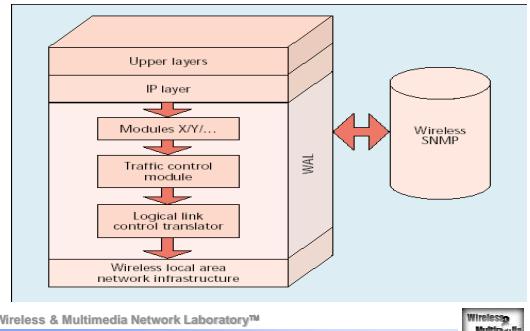


Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™


CSIE

## Detail WAL



Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

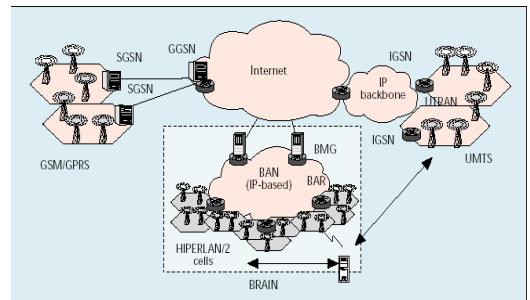


Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

CSIE


## QoS Support

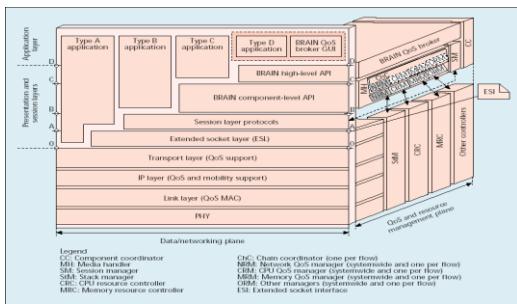

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™


## IP QoS Modeling

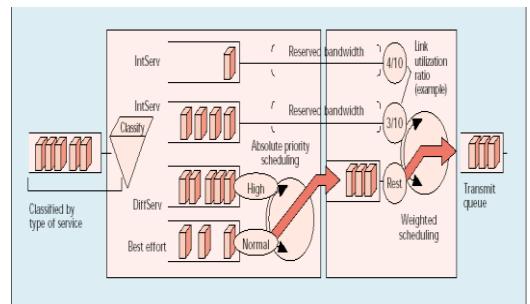

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™


## A mobile network in a B3G system



Wireless & Multimedia Network Laboratory™

CSIE

## Mobile network scenarios




Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

CSIE

## Traffic flows with basic network mobility



Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

CSIE

## Lecture Outline

- Mobility in wireless LANs
- Problems in making Internet mobile
- Canonical packet forwarding architecture for Mobile-IP
- Columbia's Mobile-IP schema

## Making the Internet Mobile

CSIE

- Goal
  - Provide continuous IP connectivity to "mobile" users.
- Mobility == change in how MH accesses the internet
  - Physically move so that access to internet is via a different basestation
  - Switch network interfaces
- Continuous connectivity
  - Datagrams for MH must be delivered to its current location
  - Mobility must be transparent to applications
    - Applications must not die or need to restarted
    - Performance transparency also desirable
- Desirable
  - Secure
  - Work across security domains
  - Require no changes to existing stationary hosts


Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

CSIE

## Mobility in Wireless LANs: Basestation as Bridges

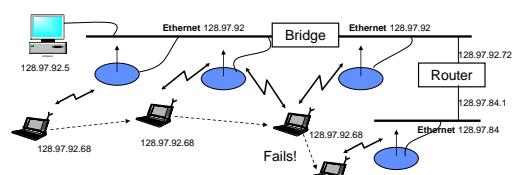

- Basestations are bridges(layer 2) – i.e. they relay MAC frames
  - Smart bridges avoid wasted bandwidth!
- Works the within an ethernet(or other broadcast LAN)
  - Fails across network boundaries, and in switched LANs(e.g. ATM)

Wireless & Multimedia Network Laboratory™


Wireless & Multimedia Network Laboratory™

CSIE

## Internet Naming and Addressing

- Collection of networks that are connected by routers
- Each internet host(each network interface) has two identifiers:
  - Internet (IP) Address(32-bit)
  - Host Name (string)
- Domain Name System (DNS) maps host names to IP address
- Applications refer to hosts by names
  - Use Domain Name System (DNS) to map host names to IP addresses
    - DNS lookup done once only at connection set-up
  - Transport protocols developed that assume this static binding
    - E.g. a TCP connection is identified by
      - <Source IP address, source TCP port, destination IP address, destination TCP port>
- Packets carry source and destination IP addresses
  - Routers use routing tables to forward packets based on destination address
  - Packet sent directly to destination within a network (e.g. ethernet)

## DNS-based Resolution

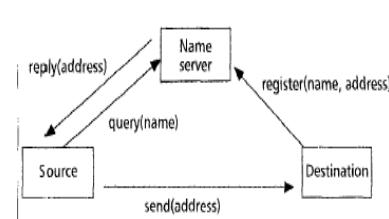

## Hierarchical Addressing

- Routers maintain network topology in routing tables
- Flat IP address space would make routing tables huge!
  - Many many millions of hosts
- IP address space is therefore *hierarchical*
  - IP address is a tuple: (network id, host id)
  - e.g., consider 192.11.35.53

Network id	Host id
192	11
35	53

- Internet routers required to maintain network topology only at the granularity of individual networks
  - Only network id part of destination address used in routing
  - Makes routing tables manageable

## “Non-solutions” to Internet Mobility


- Enhance DNS
  - Historically, DNS does not have dynamic *name-address binding* updates
    - Optimized for access cost
    - DNS clients cache DNS records
    - Hard to optimize for both access and update costs
  - Solves only part of the problem
    - TCP connections will still die!
- Keep per-MH routing information at all routers
  - Completely breaks the hierarchical routing model
  - Unbounded growth in routing table sizes at all routers
- Fix all the transport layer and higher protocols, and applications
  - Yeah, sure....

Clean solutions: fix the network (IP) layer!

## Making IP Network Layer Mobile


### Challenge of Mobile-IP

How to direct IP packets to MH that travels to a Foreign Network away from MH's Home Network?



- MH is assigned a home address as its IP address
  - Home network is the network containing the home address
  - DNS queries for MH return the home address
- Mobile-IP only concerned with moves across networks
  - Moves within home network (e.g. ethernet) handled by link-layer bridging.

## Illustration of terms

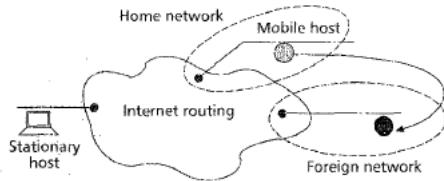

Wireless & Multimedia Network Laboratory™

CSIE


## Key to Mobile-IP Two-Tier Addressing

- MH has two IP addresses associated with it
  - Does no mean two IP address are assigned!
- First component of the address serves as the routing directive
  - Reflects MH's point of attachment to Internet
    - Derived from the foreign network
    - Changes whenever MH moves to a new network
    - Internet routers use this address to route to MH's point of attachment
- Second component of the address servers as the end-point identifier
  - This is the home address
  - Remains static throughout the lifetime of MH
  - Only this address used for protocol processing above network layer
    - MH remains virtually connected to the home network
- Two-tier addressing is only a logical concept
  - IP packet headers can't actually carry two addresses!
- MH to Stationary Host (SH) packets do not need special handling

Wireless & Multimedia Network Laboratory™

CSIE

## Two-Tier Addressing for Mobile Hosts

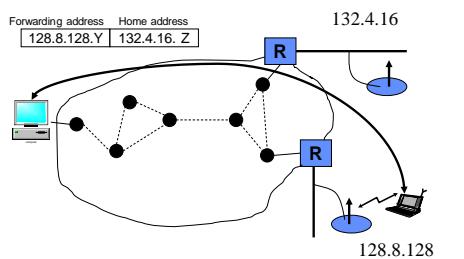


Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

CSIE

## Packet Forwarding model

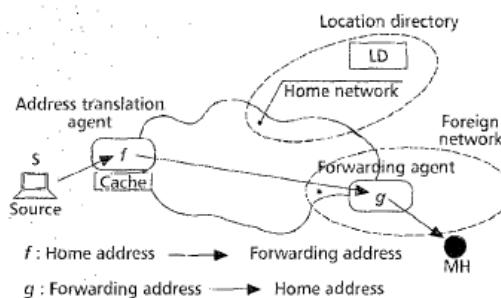


Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

CSIE

## Canonical Mobile-IP Architecture

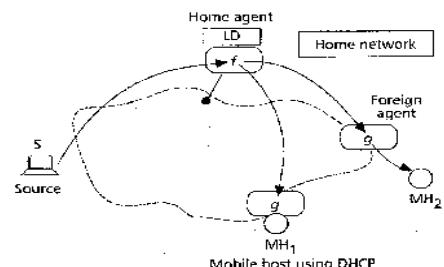

Wireless & Multimedia Network Laboratory™

CSIE

## Components of Canonical Mobile-IP Architecture

CSIE

- Forwarding Agent (FA)
  - Forwarding component of two-tier address is the address of FA entity
  - FA receives packets on behalf of MH
    - Packets contain FA's address as destination
  - FA maps forwarding address to MH's home address
    - FA:  $f$ (forwarding address)  $\rightarrow$  home address
  - FA then relays the packet to MH
  - FA represents a function, not a machine
- Issues:
  - Where can FA be located?
    - MH, BS, somewhere else
  - How does MH find the FA in a foreign network? (and, vice versa)
    - Route advertisement and registration protocol
      - FA periodically advertises its presence (beacons)

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Component of Canonical Mobile-IP Architecture (contd.)

CSIE

- Address Translation Agent (ATA)
  - CH sends packets to MH at its home address
  - ATA replaces MH's home address with FA's address in packets
    - ATA:  $f$ (home address)  $\rightarrow$  forwarding address
  - address translation involves:
    - Querying the LD
    - Obtain address of the FA corresponding to the MH
    - Use FA's address to forward packet to MH's location
  - Issues:
    - Where to locate ATA
      - At CH: but will need to change software in millions of hosts! elsewhere
    - Querying LD for every packet is expensive: cache LD entries?
      - Improves performance
      - but, requires maintaining consistency between LD and cached entries!

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Address Translation Mechanisms

CSIE

- Encapsulation approach (IP-in-IP tunnel)
  - ATA appends new header at the beginning of datagram
  - Outer header contains the forwarding address
  - Inner header contains the home address
  - Internet routes according to outer header
  - FA strips the outer header and delivers datagram locally to MH



Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Component of Canonical Mobile-IP Architecture (contd.)

CSIE

- Location Directory (LD)
  - Records association between home and forwarding addresses
    - Contains most up to date mapping of MH to its FA
  - MH sends updates to LD on moving
  - Issues:
    - Centralized vs. distributed realization
      - Centralized is infeasible – too many MHs in the Internet
    - How to distribute?
      - Cost operation
      - Security
      - Ease of location
      - Ownership
  - Possible distribution policy: *owner-maintains*
    - Some agent in home network maintains LD information for a MH responsible for security, authentication, updates, and distribution
    - a CH does not need to find the right LD component to query router in home network can forward to the correct LD component

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Location Update Protocol (LUP)

CSIE


- LUP is the reliable mechanism for
  - Keeping LD up to date
  - Keeping cached LD entries consistent with master LD
- Choice of LUP depends on caching policy
  - Together the determine scalability and routing characteristics
- What if no LD caching
  - ATA must be collocated with LD to avoid per-packet queries
  - Packets from CH will first travel to home network before being sent to FA no optimal paths!
- What if there is caching?
  - Routing efficiency is improved no more travel to home network
  - but, vulnerable to security attacks cache updates must be authenticated otherwise, traffic to MH may be redirected away!

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## ATM (Address Translation Mechanisms)

CSIE

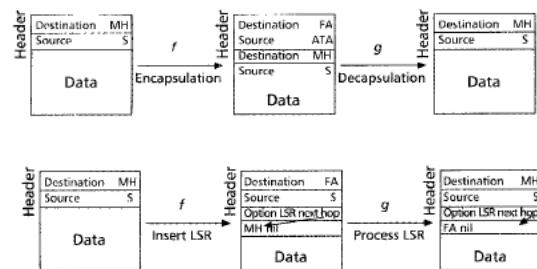

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Address Translation Mechanisms (contd.)

- Loose Source Routing approach
  - Option in IP packets to specify a sequence of IP addresses to follow path is automatically recorded in the packet destination can send reply back along reverse path
  - ATA can use LSR to cause packets to MH to be routed via FA co-locate ATA at CH, and FA at MH
    - MH sends to CH using LSR, ATA/CH reverses the path

CSIE

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Example: Columbia's Mobile IP

- Campus environment with a reserved subnet for MHs
  - MHs home address are from the reserved subnet
- Group of cooperating Mobile Support Routers (MSR)
  - MSRs advertise reachability to wireless subnet via beacons
  - MHs connect to campus backbone through MSRs
  - MSRs forward traffic to/from MHs
- On moving, MH registers with the new MSR
  - New location is provided to the previous MSR
- CH sends packet to MSR closest to CH
  - This MSR either delivers the packet or, forwards it to the right MSR after encapsulation
  - Right MSR is located by a multicast WHO\_HAS query to other MSRs
- Wide area operation uses a pop-up mode
  - A temporary address is used by MH as a forwarding address
  - MH does its own encapsulation/decapsulation

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Columbia's Mobile-IP Mapped to Canonical Architecture

- MSR performs both encapsulation & decapsulation
  - Both f and g are collocated at MSR
  - MSR acts as FA for MHs in its coverage area
  - MSR acts as ATA for packets addressed to other MHs
- LD is distributed realization of the owner-maintains scheme
  - Each MSR maintains a table of MHs in its coverage
  - MSRs are a distributed realization of home router
  - Tables of MHs in MSRs together constitute an owner-maintained LD
- Caching policy for LD entries is "need-to-know"
  - MSR sends WHO\_HAS query if it does not know MH's location
- LUP is lazy-update
  - When MH moves, only primary and previous copy of LD entry is updated
  - Cached entries are assumed correct by default
  - Stale cache entry causes packet delivery failure, triggering WHO\_HAS
- 100% backward compatible – no existing internet entities are affected

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Various Mobile-IP Proposals


- Many Mobile-IP systems have been proposed (and some implemented)
  - Columbia's Mobile-IP
  - Sony's Virtual (VIP)
  - IBM's LSR Scheme
  - Stanford's MosquitoNet Scheme
  - IMHP (Internet Mobile Host protocol)
  - IETF's Mobile-IP for IPv4
  - IETF's Mobile-IP for IPv6
  - etc.
- All are special cases of the canonical mobile-IP architecture
  - Make different choices of
    - FA location
    - ATA location
    - Choice of LUP address translation mechanism

CSIE

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Columbia Proposal

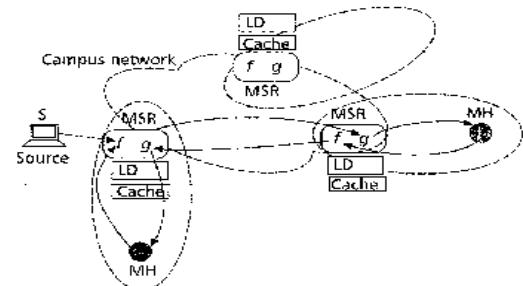

Wireless & Multimedia Network Laboratory™


Wireless  
Multimedia

## Performance Characteristics of Columbia Mobile-IP

- Control
  - LD cache at ATA is updated when packet routing is needed
  - Limits control traffic
  - But, slow "first" packet due to WHO\_HAS query results in SYN packet being lost in TCP (start of transmission)
- Overhead of IP-in-IP
  - 20 bytes (4% on 500 byte packets)
- Routing
  - Requires routing to nearest MSR to be optimal
  - Not optimal for pop-up mode
- Implementation on 33 MHz 486 based MSRs
  - 1.4 ms for WHO\_HAS
  - 45 microseconds for encapsulation (per packet overhead)

Wireless  
Multimedia

## Route Optimization

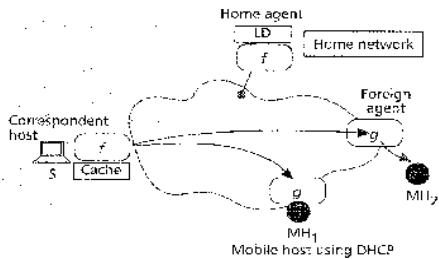

Wireless & Multimedia Network Laboratory™

CSIE

## Route Optimizations



Figure 4. Behavior when CH is Close to MH



Figure 5. A Smart Correspondent Host

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

CSIE

## Security Issues



Figure 2. Problem with Source Address Filtering




Figure 3. Bi-directional Tunneling

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

## Tunneling

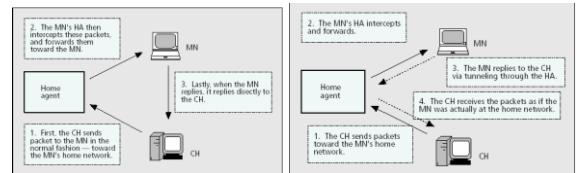


Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

CSIE

## IPv6 Mobility Proposal

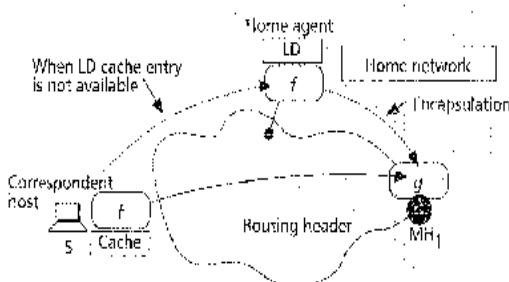

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™


## Evolutions of PCS




PCS Requirements

CSIE

## PCS network architecture

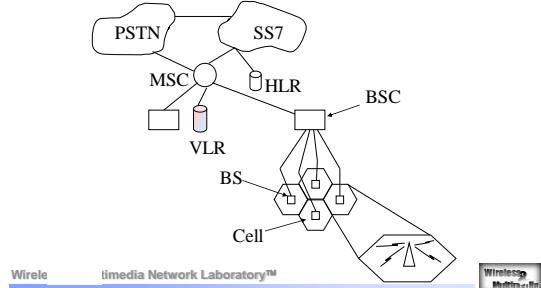

## Location Update Procedure

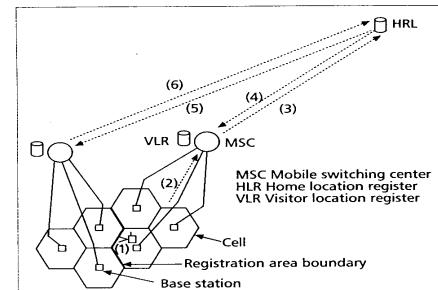


■ Figure 3. Location registration procedures.

Wireless & Multimedia Network Laboratory™

CSIE

## GPRS

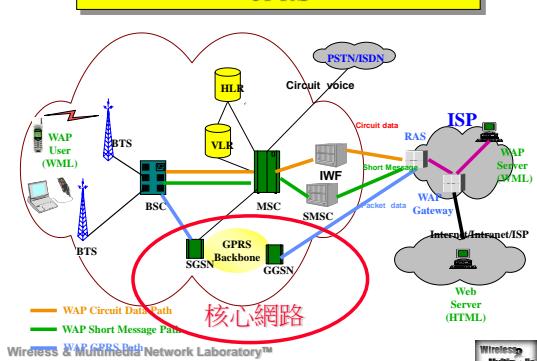


Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

CSIE


## Data transfer MS-fixed

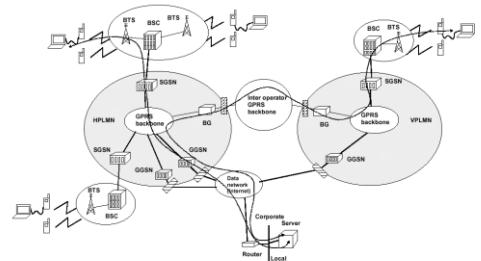

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

## Data transfer MS-MS

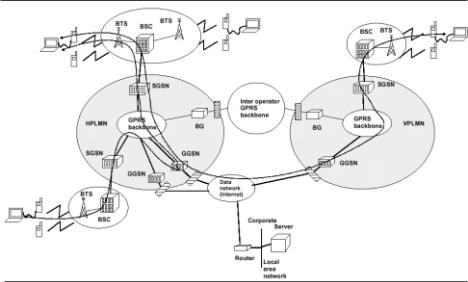

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

## Coming Challenges for IP




Location Managements~ handoff, roaming  
QoS Transport- Backbone delivery

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

## Mobility Management

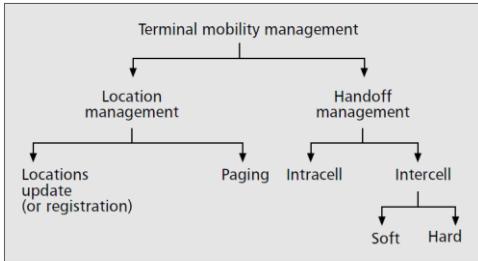

■ Figure 1. Classification of mobility management.


Wireless & Multimedia Network Laboratory™

CSIE

## Mobility

- User mobility
  - Micro
  - Macro
- IP mobility support
  - Mobile IP
  - Cellular IP
  - HAWAII
  - Hierarchical Mobile IP


- Handoff issue
- Location management
- Paging



Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

## Mobility Protocols

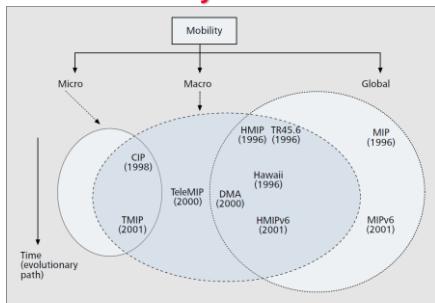

■ Figure 2. Mobility classification of protocols.

Wireless & Multimedia Network Laboratory™

CSIE

## Mobility Protocols

Mobility	Protocol	LUs
		Global (up to HN)
Global	MIP	$P^*N$
	TR45.6	$P^*N$
	MIPv6	$P^*N$
Global/macro	HMIPI6	$P^*(N/R)^*L$
	HMIPI6	$P^*(N/R)^*L$
	TeleMIP	$P^*(N/R)$
	DMA	$P^*(N/R)$
Macro	HAWAII	$P$
Macro/micro	TMIP	$P$
	CIP	$P$

$P$  = Number of MNs,  $N$  = Number of subnets,  
 $R$  = Number of subnets handled by an MA,  $M = N/R$ ,  
 $L$  = Number of levels of hierarchy in HMIPI6 and HMIPI6


■ Table 1. Analytical estimate of LUs.

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

CSIE


## Nomadic wireless access



Wireless & Multimedia Network Laboratory™

CSIE


## Cellular IP

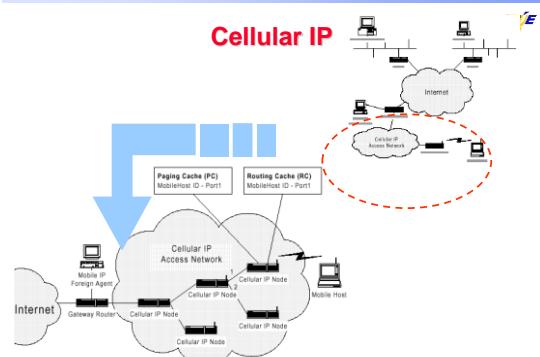

Wireless & Multimedia Network Laboratory™

Wireless & Multimedia Network Laboratory™

## Hierarchical Mobility Management

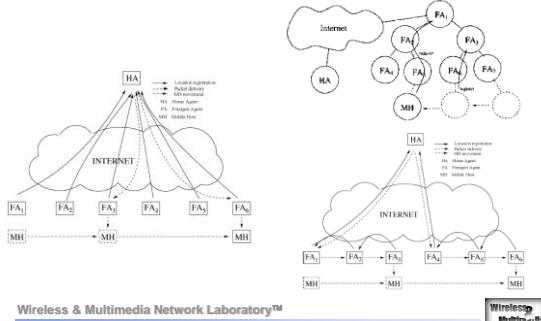

## Mobility Management

### Mobility Classification

- Roaming
- Macro-mobility
  - Domain mobility
- Micro-mobility
  - Subnet mobility


### Solutions

- Network layer solution: Mobile IP
- Application layer solution: SIP


Wireless & Multimedia Network Laboratory™




## Mobile IPv4: Registration Example

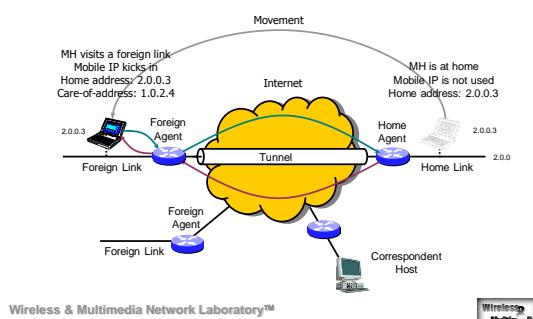

## Mobile IPv4: CH-to-MH Routing Example

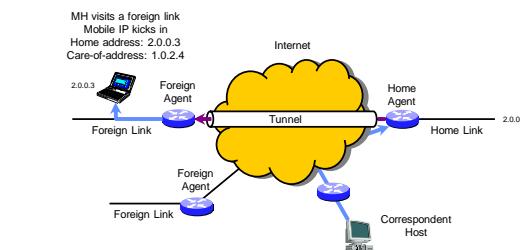

## Mobile IPv4: MH-to-CH Routing Example

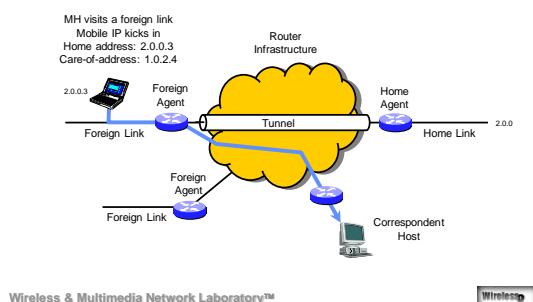

## Mobile IPv4


### Triangle route problem

- Micro-mobility improvement
  - Cellular IP, Campbell in Column University.
  - Regional Registration, Perkins, Nokia Center.
  - ...

Wireless & Multimedia Network Laboratory™



## Mobile IPv6: Binding Update

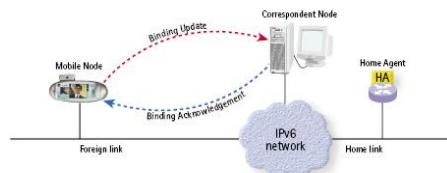

Wireless & Multimedia Network Laboratory™


Wireless  
Multimedia

CSIE

## Application Layer Mobility Using SIP

- Terminal Mobility
- Session Mobility

### Terminal Mobility

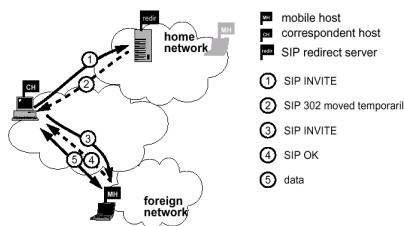


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

CSIE

### Terminal Mobility

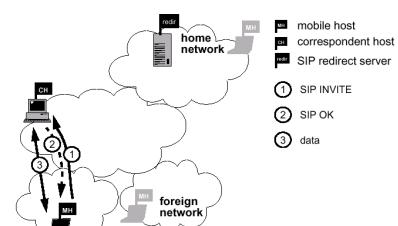


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

CSIE


### Session Mobility

- Allow a user to maintain a media session even while changing terminals.



Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

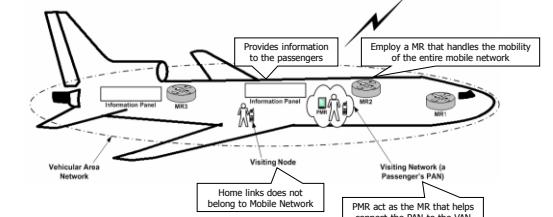


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

CSIE

## How the NEMO works

CSIE

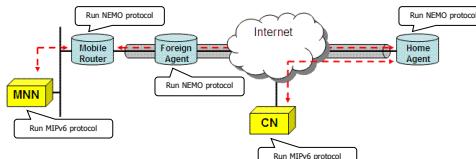


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## NEMO Binding update & Packet Delivery procedure

CSIE

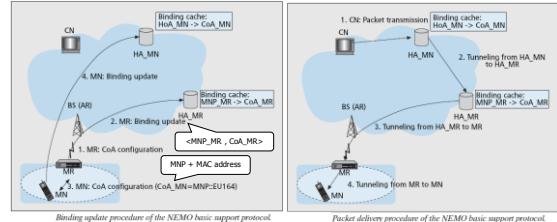

Binding update procedure of the NEMO basic support protocol.

Packet delivery procedure of the NEMO basic support protocol.


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## SafeWeb

CSIE

- A big proxy
- Reassembly HTML to hide user info.
- Using SSL between SafeWeb and Client

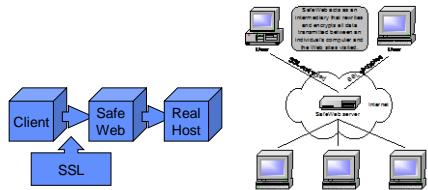


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## Screenshot of SafeWeb

CSIE

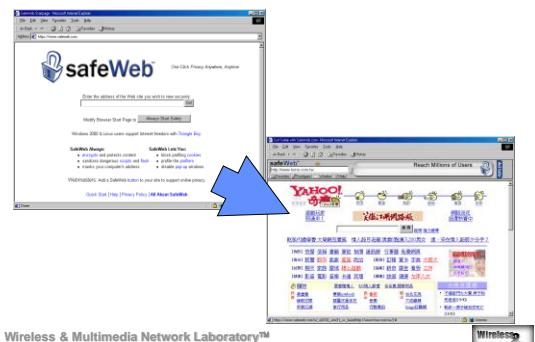


Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

## TBoy

CSIE


- Redirect the Request to SafeWeb
- SafeWeb will send response using TBoy IP.

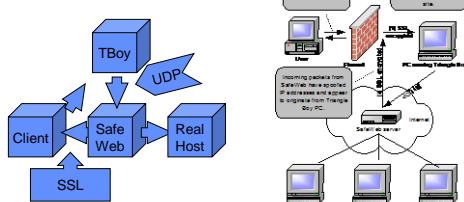

Wireless & Multimedia Network Laboratory™

Wireless  
Multimedia

- A paging area consists of one or more networks



Wireless & Multimedia Network Laboratory™


Wireless  
Multimedia

## P-MIP

CSIE

- A paging area consists of one or more networks

## Hawaii (Handoff-aware Wireless Access Internet Infrastructure)

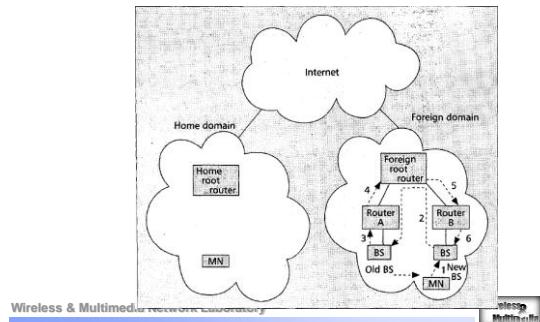

## Vehicular Area Network

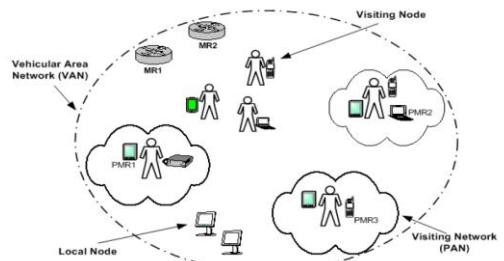


Figure 2: Abstract View of a Vehicular Area Network

Wireless & Multimedia Network Laboratory™



## Nested Bi-Directional Tunneling

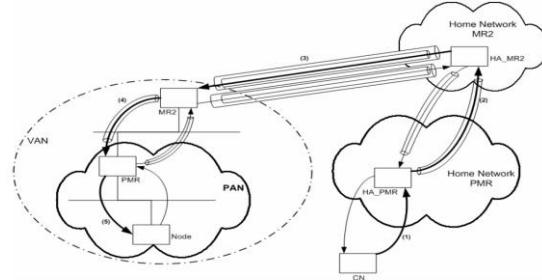


Figure 3: Nested Bi-Directional Tunneling

Wireless & Multimedia Network Laboratory™

